

TOLCO Fig. 200 - "Trimline" Adjustable Band Hanger

TOLCO Fig. 200F - "Trimline" Adjustable Band Hanger with Felt Lining for Copper Tubing

TOLCO Fig. 200C - "Trimline" Adjustable Band Hanger with Plastic Coated

TOLCO Fig. 200S - "Trimline" Adjustable Band Hanger with Removable Nut (For sizes 1" thru 2")

Size Range:

Fig. 200 - 1/2" (15mm) thru 8" (200mm) pipe

Material: Steel, Pre-Galvanized

Function: For fire sprinkler and other general piping purposes. Knurled swivel nut design permits hanger adjustment after installation.

Features:

- 1/2" (15mm) thru 2" (50mm) sizes have flared edges for ease of installation on all pipe types and protects CPVC plastic pipe from abrasion. Captured knurled nut design (flared top) on 1" thru 2" sizes keep nut from separating with hanger. Hanger is easily installed around pipe.
- 1/2" (15mm), 3/4" (20mm), and 2 1/2" (65mm) thru 8" (200mm) Spring tension on nut holds it securely in hanger before installation. Knurled nut is easily removed.
- For 1/2" (15mm) and 3/4" (20mm) sizes with non-captured knurl nuts order Fig. 200S

Approvals: Underwriters Laboratories listed (1/2" (15mm) thru 8" (200mm)) in the USA (**UL**) and Canada (**cUL**) for steel and CPVC plastic pipe and Factory Mutual Engineering Approved (**FM**) (3/4" (20mm) thru 8" (200mm)). Conforms to Federal Specifications WW-H-171E & A-A-1192A, Type 10 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 10.


Maximum Temperature: 650°F (343°C)

Finish: Pre-Galvanized. Stainless Steel materials will be supplied with (2) hex nuts in place of a knurl nut.

Order By: Part number and pipe size

**** Note:** For metric hanger rod sizes add the metric rod size to the figure number.
Example: 200M8-1 1/2 or 200M10-1 1/2

† M8 rod size is not UL Listed or FM Approved

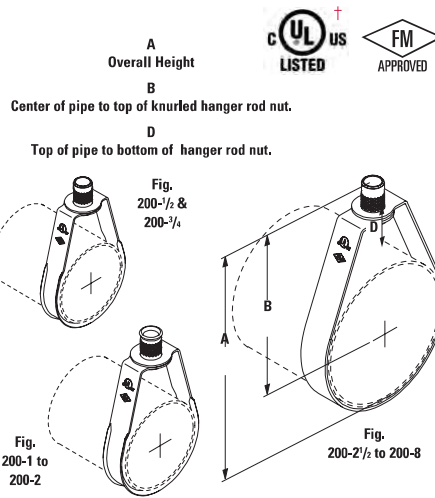

Pipe Hangers

Part No.**	Pipe Size in. (mm)	Rod Size in. mm**	A in. (mm)	B in. (mm)	D in. (mm)	Max. Rec. Load lbs. (kN)	Approx. Wt./100 lbs. (kg)
200-1/2	1/2" (15)	3/8"-16 M8† or M10	3 1/8" (79.4)	2 5/8" (66.7)	1 11/32" (34.1)	400 (1.78)	11 (5.0)
200-3/4	3/4" (20)	3/8"-16 M8† or M10	3 1/8" (79.4)	2 1/2" (63.5)	1 1/16" (27.0)	400 (1.78)	11 (5.0)
200-1	1" (25)	3/8"-16 M8† or M10	3 3/8" (85.7)	2 5/8" (66.7)	1 1/8" (28.6)	400 (1.78)	12 (5.5)
200-1 1/4	1 1/4" (32)	3/8"-16 M8† or M10	3 3/4" (94.0)	2 7/8" (73.0)	1 3/32" (29.3)	400 (1.78)	13 (5.9)
200-1 1/2	1 1/2" (40)	3/8"-16 M8† or M10	3 7/8" (98.4)	2 7/8" (73.0)	1 3/16" (30.2)	400 (1.78)	14 (6.4)
200-2	2" (50)	3/8"-16 M8† or M10	4 1/2" (114.3)	3 9/16" (80.8)	1 3/16" (30.2)	400 (1.78)	15 (6.9)
200-2 1/2	2 1/2" (65)	3/8"-16 M10	5 5/8" (142.9)	4 1/8" (104.7)	1 1/16" (36.5)	600 (2.67)	27 (12.3)
200-3	3" (75)	3/8"-16 M10	5 7/8" (149.1)	4" (101.6)	1 1/4" (31.7)	600 (2.67)	29 (13.3)
200-3 1/2	3 1/2" (90)	3/8"-16 M10	7 3/8" (187.3)	5 1/4" (133.3)	2 3/16" (55.6)	600 (2.67)	34 (15.6)
200-4	4" (100)	3/8"-16 M10	7 3/8" (187.3)	5" (127.0)	1 3/8" (34.9)	1000 (4.45)	35 (16.0)
200-5	5" (125)	1/2"-13 M12	9 1/8" (231.8)	6 1/4" (158.7)	3 11/32" (84.9)	1250 (5.56)	66 (30.2)
200-6	6" (150)	1/2"-13 M12	10 1/8" (257.2)	6 3/4" (171.4)	2 7/32" (56.3)	1250 (5.56)	73 (33.4)
200-8	8" (200)	1/2"-13 M12	13 1/8" (333.4)	8 3/4" (222.2)	3 7/32" (81.7)	1250 (5.56)	136 (62.3)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.