



RESI-RISER™ & RESI-PAC™

DISTRIBUTED BY:

PACEsupply
CORP.

FIRE PROTECTION

(877) 934-3473

firesales@pacesupply.com

RESI-RISER™

The RESI-RISER™ is a pre-assembled, compact, and attractive fire sprinkler riser unit for residential sprinkler systems in NFPA 13, 13D, and/or 13R systems.

The RESI-RISER™ manifold is manufactured as a one-piece brass casting that is air tested for leaks.

- Raised lettering on both sides allows the RESI-RISER™ to be installed to the right or left and easily identifies the flow direction and Test & Drain outlet.
- Two mounting legs are molded onto the manifold, thus allowing for a secure left or right anchoring.
- The flow switch has dual SPDT switches and a retard of 0-90 seconds.

\$ An optional all in one cost saving Pressure Relief Test and Drain Valve is available. (See Below)

The RESI-RISER'S™ unique design gives the ability to be installed within 2x4 frame construction.

- Every size RESI-RISER™ fits in a 2x4 wall 16" on center

RESI-PAC™

The RESI-PAC™ is a completely enclosed and attractive metal cabinet, that contains the RESI-RISER™.


\$ RESI-PAC™ eliminates the need for an access panel and the return trip to install it.

- Dry wall is placed up to the cabinet's edge giving it a clean finish
- The Riser is protected throughout the construction phase and after completion.
- On the inside of the door is a history record of past system inspections and a hydraulic calc plate.

\$ The RESI-PAC™ has built in locations for placement of spare heads / wrenches and eliminates the extra-expense of an unsightly red head box to be installed on the exterior of the wall.

- The RESI-PAC™ can be recessed in a 2x4 wall or mounted on the surface.
- The RESI-PAC™ has all necessary openings for electrical and piping penetrations.
- The RESI-PAC™ has a white powder coat finish that blends well.

- Every size RESI-PAC™ fits in a 2x4 wall 16" on center

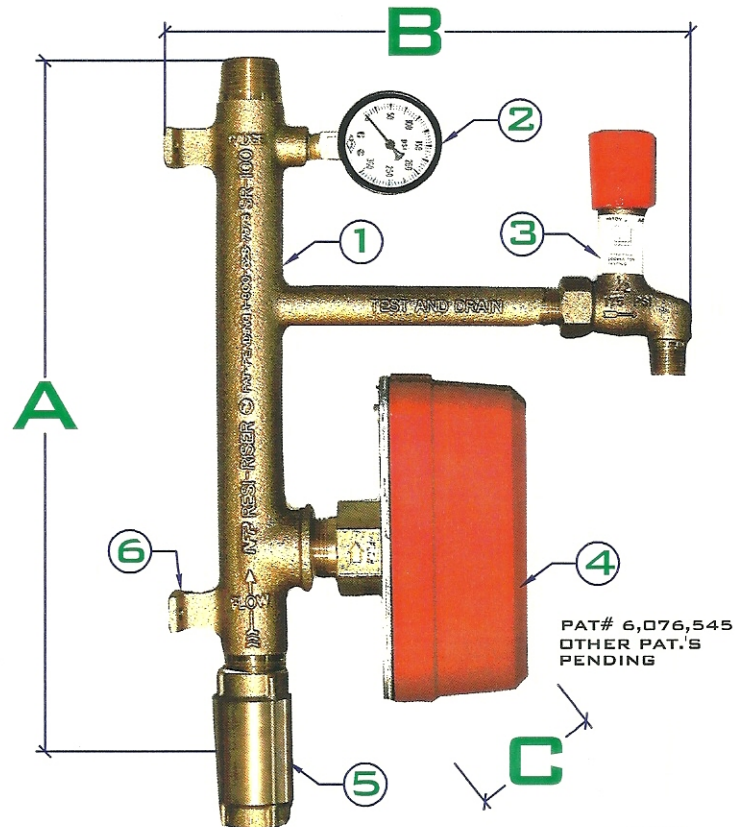

PAT# 6,076,545
OTHER PAT.'S
PENDING



PATENTS PENDING

Size Chart RESI-RISER™					
Description	1"	1-1/4"	1-1/2"	2"	
Height	A*	13"	13"	13"	13"
Width	B**	10-3/4"	11-1/2"	12"	12-1/2"
Depth	C	3-1/2"	3-1/2"	3-1/2"	3-1/2"
Drain Size		1/2"	1"	1"	1"

Measurements include all spacing needed to operate drain valve and remove flow switch cover.

*With out check valve

**With or with out pressure relief valve

Component Description	
1	RESI-RISER™ Manifold
2	300 PSI. Water Gauge
3	PRTDV™ (Pressure Relief Test and Drain Valve)
4	Flowswitch w/ Dual SPDT Switches
5	Check Valve
6	Mounting legs

Size Chart RESI-PAC™					
Description	1"	1-1/4"	1-1/2"	2"	
Height	A	18-1/4"	18-1/4"	TBA	TBA
Width	B	14"	14"	14"	14"
Depth	C	4-5/8"	4-5/8"	4-5/8"	4-5/8"
Drain Size		1/2"	1"	1"	1"



HOW IT WORKS

(PRESSURE RELIEF TEST AND DRAIN VALVE)

