

TOLCO Fig. 58 - threaded side beam bracket

Size Range: $\frac{3}{8}$ "-16 rod, pipe sizes $\frac{1}{2}$ " (15mm) thru 4" (100mm)

Material: Pre-Galvanized Steel

Function: Practical and economical bracket used to support piping from wood, concrete or steel beams.


Features: Unique design allows rod to be easily threaded into bracket. Offset design permits unlimited rod adjustment. Center mounting hole will accept $\frac{3}{8}$ " and $\frac{1}{2}$ " fastener bolts. Per NFPA 13: $\frac{1}{2}$ " (15mm) thru 2" (50mm) pipe requires $\frac{3}{8}$ " fastener, 2 $\frac{1}{2}$ " (65mm) thru 4" (100mm) pipe requires $\frac{1}{2}$ " fastener.*

Approvals: Underwriters Laboratories Listed in the USA (UL) and Canada (cUL), and Factory Mutual Engineering approved thru 4" (100mm) pipe.

Finish: Pre-Galvanized

Order By: Figure number and finish

***Note:** Additionally UL has listed the Fig. 58 with fasteners as shown in table below.

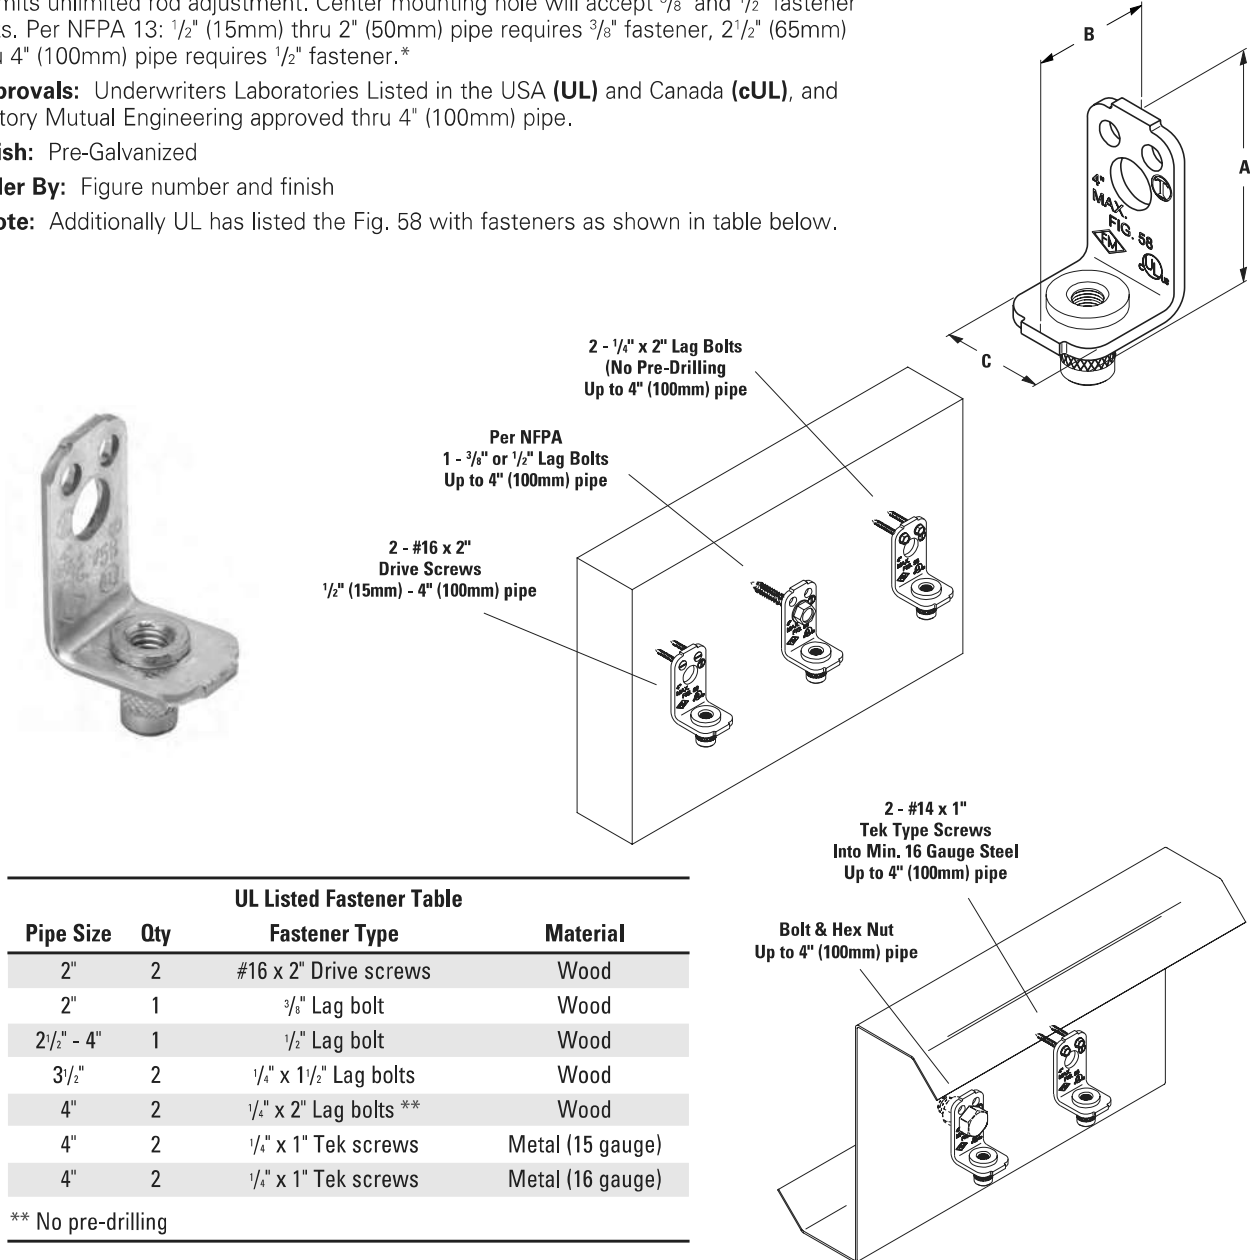

UL Listed Fastener Table			
Pipe Size	Qty	Fastener Type	Material
2"	2	#16 x 2" Drive screws	Wood
2"	1	$\frac{3}{8}$ " Lag bolt	Wood
2 $\frac{1}{2}$ " - 4"	1	$\frac{1}{2}$ " Lag bolt	Wood
3 $\frac{1}{2}$ "	2	$\frac{1}{4}$ " x 1 $\frac{1}{2}$ " Lag bolts	Wood
4"	2	$\frac{1}{4}$ " x 2" Lag bolts **	Wood
4"	2	$\frac{1}{4}$ " x 1" Tek screws	Metal (15 gauge)
4"	2	$\frac{1}{4}$ " x 1" Tek screws	Metal (16 gauge)

** No pre-drilling

Larger pipe sizes can be hung with reduced spacing.

Part No.	Pipe Size		Rod Size	A		B		C		Approx. Wt./100
	in.	(mm)		in.	(mm)	in.	(mm)	in.	(mm)	
58	$\frac{1}{2}$ " - 4"	(15 - 100)	$\frac{3}{8}$ "-16	2 $\frac{3}{4}$ "	(69.8)	1 $\frac{1}{2}$ "	(38.1)	1 $\frac{1}{8}$ "	(28.6)	14 (6.3)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.