

GENERATORI D'ARIA CALDA ELETTRICI CON VENTILATORE


POSSIBILITÀ DI COLLEGAMENTO A TUBO FLESSIBILE



ELETTRICO



B 18 - Ø 31 cm
B 30 - Ø 41 cm

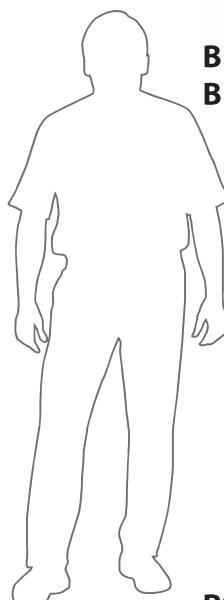

RS 40 - Ø 51 cm
DOMANDA
DI BREVETTO DEPOSITATA

ACCESSORI OPZIONALI:



Termostato ambiente TH5 con cavo
3 m - 4150.109 € 53,00
10 m - 4150.112 € 79,00



Uscita 2 vie
B 18 - Ø 23 cm - 4511.808 € 95,00
B 30 - Ø 31 cm - 4511.807 € 145,00



Prolunga
B 18 - 32A, 5 m - 4511.033 € 89,00
B 18 - 32A, 10 m - 4511.034 € 139,00
B 30, RS 40 - 63A, 5 m - 4511.035 € 189,00
B 30, RS 40 - 63A, 10 m - 4511.036 € 269,00



Kit canalizzatore
RS 40 - 4210.180 € 85,00



Tubi flessibili Uscita 1 via
B 18 - Ø 31 cm - 7,6 m - 4515.553 € 140,00
B 30 - Ø 41 cm - 7,6 m - 4031.401 € 209,00
RS 40 - Ø 51 cm - 7,6 m - 4515.552 € 239,00
Tubi flessibili Uscita 2 vie
B 18 - 2 x Ø 23 cm - 4515.557 € 139,00
B 30 - 2 x Ø 31 cm - 4515.553 € 140,00



CARATTERISTICHE	B 18	B 30	RS 40	
Potenza	kW Btu/h kcal/h	9/18 30.700-61.400 7.740-15.480	15/30 51.200-102.400 12.900-25.800	13/26/40 44.360-136.500 11.200-34.400
Portata d'aria	m³/h	1.700	3.500	3.100
Alimentazione	V	3N 400	3~ 400	3~380-400
Frequenza	Hz	50-60	50	50
Presa (maschio) integrata sulla macchina		32A/5P	63A/5P	63A/5P
Assorbimento	A	26	43,5	58
Posizione 1		spento	spento	Ventilatore
Posizione 2		Ventilatore	Ventilatore	13 kW
Posizione 3/4	kW	9/18	15/30	26/40
Termostato		opzionale TH5	opzionale TH5	a bordo
Range di temperatura	< 25	< 25	< 25	-5 - +35
Protezione		IP24	IP24	IP20
Dimensioni prodotto (l x l x a)	mm	700 x 490 x 530	1030 x 580 x 680	990 x 710 x 800
Dimensioni imballo (l x l x a)	mm	600 x 400 x 460	1050 x 600 x 820	870 x 630 x 770
Peso netto/lordo	kg	27/29,3	53/63	46/52
Paletta	pz	16	1	6
PREZZI DI LISTINO	€	690,00	1.430,00	1.650,00

* Tutti i prezzi sono da intendere IVA ESCLUSA

