



FULL LINE CATALOG

**Products for FARM, HOME,
INDUSTRIAL, and CONSTRUCTION**

September 2022

HOT MAX



TORCHES™

KDAR Company would like to thank you for the opportunity to serve you. Our catalog has many items for the Welding, Automotive, Lawn and Garden, and Tool Industries supplying innovative, high quality products at great prices. Our products are great for professionals, homeowners, and farm/ranch owners that are looking for consistent reliability.

Our goal is to produce quality items at competitive pricing and continue to introduce new items on an ongoing basis. We are always looking for those items that need development, improvement, or a lower cost to acquire. We welcome your ideas and needs for your particular business.

With over 40 years' experience in retail, we are here to serve you and supply you with the needs of the modern businesses selling these products. Since we are a family owned business, we are dedicated to serving you and we offer that personal attention in all matters of business. Our motto is, "We make quality products with more features at competitive prices all backed with great service."

We appreciate your support and look forward to serving you.

Sincerely,

KDAR Company



3671 New Town Blvd
St. Charles, MO 63301
(636) 493-9920 M-F 8-5 pm, CST
www.kdarco.com

September 2022

TABLE OF CONTENTS

WELDING EQUIPMENT

MIG WELDERS AND ACCESSORIES.....	1-4
WELDING ACCESSORIES.....	5-11
MIG WIRE, ELECTRODES, TIG ROD.....	11-18
RECEPTACLES AND PLUGS.....	19
WELDING CAPS AND CLOTHING.....	20

GAS WELDING EQUIPMENT

BIG MAX FAMILY PROPANE TORCHES.....	21-26
PROPANE ACCESSORIES.....	26-32
OXYGEN-ACETYLENE TORCH KITS.....	33-38
CUTTING TIPS/WELDING NOZZLES.....	39-42
BRAZING ROD AND BRAZING FLUX.....	43-44
SOLDER AND SOLDER FLUX.....	45-46
HOSES FITTINGS, ETC.....	47-49
REGULATORS AND GAUGES.....	50
HOSES AND OXYGEN/ACETYLENE TANKS.....	51
STRIKERS, FLINTS, TIP CLEANERS, ETC.....	52-53

SAFETY EQUIPMENT

HELMETS AND LENSES.....	54-57
BRAZING GOGGLES.....	58
GLOVES.....	58-59
FACE SHIELDS AND SAFETY.....	60

TABLE OF CONTENTS

ABRASIVES AND BRUSHES

E-Z SANDER® HAND SANDER.....	61
BENCH WHEELS.....	62
CUT OFF AND GRINDING	63-66
BRUSHES.....	67-69
CUP BRUSHES.....	70
END BRUSHES AND WIRE WHEELS.....	71-72
QUICK CHANGE MIN ABRASIVES.....	73-74
OTHER ABRASIVES.....	75-80

TOOLS

CARBIDE BURRS.....	81-82
PLIERS, MAGNETS, SOAPSTONE.....	83-84
PIPE LAYOUT TOOLS.....	85
MARKERS	86
METAL FILES AND JUMPER CABLE CLAMPS.....	87-88
PIPE TRHEAD TAPE.....	88
CUTTING FLUID AND CHEMICALS.....	89

AIR FITTINGS AND ACCESSORIES

COUPLERS AND PLUGS.....	90-96
BLOW GUNS, CHUCKS, GUAGES.....	96-99
FILTERS, REGULATORS, OILERS.....	99-100
HOSES, FITTINGS, AND MISC.....	100-107

PRESSURE WASHER ACCESSORIES..108-114



HOT MAX 125 AMP MIG WELDER - MODEL 125WFG

The Hot Max 125WFG MIG Welder is ready to weld with shielding gas or flux core right out of the box.

FEATURES:

Infinite Output Voltage Controls which can be adjusted as you weld!

Infinite Wire Speed Control

Factory pre-wired and ready for optional Spool Gun (Model #SPG).

Easy polarity change for switching between shielding gas and flux core wire.

Drive roller fits .023" to .035" wire. Larger drive wheel available.

2 Year Limited Warranty on Machine, 90 Day Warranty on Gun and Hoses, for Parts and Labor

SPECIFICATIONS:

Input Current/Voltage: 15 Amps at 120 Volts, Single Phase

Output: 25-125 Amps DC

Minimum Duty Cycle: 20%

Welds up to 1/4" with Flux Core Wire

WELDER INCLUDES THE FOLLOWING COMPONENTS:

Ground Clamp with 9' Cable

MIG Gun with 10' Hose

CO2/Argon Regulator with 5' Hose

2# Spool of .030" Flux Core Wire

Gas Nozzle for MIG Welding

Hex Wrench for wire feed roller

.025", .030", and .035" Contact Tips

10# Wire Spool Adapter

Shielding gas is NOT included.

MIG WELDERS



HOT MAX 135 AMP MIG WELDER - MODEL 135WFG

The Hot Max 135WFG MIG Welder is ready to weld with shielding gas or flux core right out of the box.

FEATURES:

Infinite Output Voltage Controls which can be adjusted as you weld!

Infinite Wire Speed Control

Factory pre-wired and ready for optional Spool Gun (Model #SPG).

Easy polarity change for switching between shielding gas and flux core wire.

Drive roller fits .023" to .035" wire. Larger drive wheel available.

2 Year Limited Warranty on Machine, 90 Day Warranty on Gun and Hoses, for Parts and Labor

SPECIFICATIONS:

Input Current/Voltage: 20 Amps at 120 Volts, Single Phase

Output: 25-135 Amps DC

Minimum Duty Cycle: 20%

Welds up to 5/16" with Flux Core Wire

WELDER INCLUDES THE FOLLOWING COMPONENTS:

Ground Clamp with 9' Cable

MIG Gun with 10' Hose

CO2/Argon Regulator with 5' Hose

2# Spool of .030" Flux Core Wire

Gas Nozzle for MIG Welding

Hex Wrench for wire feed roller

.025", .030", and .035" Contact Tips

10# Wire Spool Adapter

Shielding gas is NOT included.



HOT MAX SPOOL GUN FOR MIG WELDERS - MODEL 23241

FEATURES:

Designed for Hot Max 125/135/175/250WFG MIG welders (180 Amp rated). Uses standard Size 11 contact tips. 20' gun lead for welding in hard to reach places and reduces machine relocation.

See through cover so you can easily check amount of wire on the spool.

Great for aluminum but will also weld mild steel (with or without gas) and stainless steel.

Holds 4" wire spools.

12V DC Drive motor



HOT MAX MIG GUN REPLACEMENT WITH 10' LEAD
For 125/135/175/250WFG Welders (Tweco® Compatible)
250 Amp Rated, Uses standard Size 11 contact tips

MODEL 23243



HOT MAX REPLACEMENT CO2/ARGON REGULATOR
CGA-580 Inlet connection, 5/8"-18 RH female outlet connection

MODEL 23201

HOT MAX REPLACEMENT SHIELDING GAS HOSE - 5'
5/8"-18 RH male connectors on both ends

MODEL 23203

MIG WELDER PARTS



HOT MAX MIG GAS NOZZLE FOR MODEL 23243 MIG GUN (Tweco® Compatible), Slide On, 1/2" Bore

MODEL 23246



BRASS CONTACT TIP HOLDER FOR MIG GUN MODEL 23243 Works with Size 11 Contact Tips
MODEL 23257

CERAMIC GAS DISTRIBUTOR FOR MIG GUN MODEL 23243
MODEL 23256



HOT MAX 250WFG REPLACEMENT DRIVE MOTOR WHEELS

<u>MODEL</u>	<u>DESCRIPTION</u>
23253	.030" / .040" REPLACEMENT DRIVE WHEEL
23254	.040" / .045" REPLACEMENT DRIVE WHEEL



HOT MAX 250WFG HEATED GAS REGULATOR AND FLOW GAUGE - 36 VOLT

MODEL 23242



250 WFG Replacement Ground Clamp and Lead
MODEL 23258



250 WFG Replacement TIG Foot Pedal
MODEL 23240



250 WFG Replacement TIG Gun and Lead
MODEL 23244



HOT MAX MIG WELDER CONTACT TIPS
FOR 125/135/175/250 WELDERS (TWECO® COMPATIBLE)

<u>MODEL</u>	<u>DESCRIPTION</u>
22053	.025" (.6 MM) CONTACT TIPS - 5/PK (SIZE 11-23)
22054	.030" (.8 MM) CONTACT TIPS - 5/PK (SIZE 11-30)
22055	.035" (.9 MM) CONTACT TIPS - 5/PK (SIZE 11-35)
23020	.040" (1.0 MM) CONTACT TIPS - 5/PK (SIZE 11-40)
23021	.045" (1.2 MM) CONTACT TIPS - 5/PK (SIZE 11-45)



HOT MAX MIG WELDER MIG GUN GAS DIFFUSER
FOR 125/135/175 WELDERS (TWECO® COMPATIBLE SIZE 51)
For use with Size 11 contact tips up to 180 Amps

MODEL 23093



HOT MAX MIG WELDER GAS NOZZLES
FOR 125/135/175 WELDERS (TWECO® COMPATIBLE)
Thread on nozzles for use with Size 51 diffusers. Thread on.

<u>MODEL</u>	<u>DESCRIPTION</u>
23090	1/2" BORE MIG NOZZLE
22057	5/8" BORE MIG NOZZLE
23092	5/8" BORE MIG SPOTWELD NOZZLE



HOT MAX FLUX CORE NOZZLE
FOR 125/135/175 WELDERS (TWECO® COMPATIBLE)
Plastic thread on nozzle for use with Size 51 diffusers.

MODEL 22058



HOBART® COMPATIBLE CONTACT TIPS
Rated up to 180 Amps

<u>MODEL</u>	<u>DESCRIPTION</u>
23022	.025" CONTACT TIPS - 5/PK
23023	.030" CONTACT TIPS - 5/PK
23024	.035" CONTACT TIPS - 5/PK



HOBART® COMPATIBLE NOZZLES - Slide on

<u>MODEL</u>	<u>DESCRIPTION</u>
23094	1/2" BORE MIG NOZZLE
23095	5/8" BORE MIG NOZZLE



BINZEL® COMPATIBLE NOZZLES - Slide on

<u>MODEL</u>	<u>DESCRIPTION</u>
23097	3/8" BORE MIG NOZZLE
23096	1/2" BORE MIG NOZZLE
23098	5/8" BORE MIG SPOTWELD NOZZLE



MIG PLIERS

Perfect multiuse pliers for MIG welding - wire cutter, nozzle cleaner, nozzle pliers, contact tip pliers, welding slag hammer, and needle nose style pliers.

MODEL 22027



ANTI-SPATTER NOZZLE GEL, 16 OZ

Prevents welding spatter from sticking to nozzles and contact tips. Works on all types of welders and does not affect the weld. Made in the USA.

MODEL 23110



SILICONE FREE ANTI-SPATTER SPRAY, 16OZ

Prevents welding spatter from sticking to nozzles, contact tips, and metal being welded. Made in the USA.

MODEL 23000



20 CUBIC FOOT ARGON/CO2 CYLINDER, EMPTY
CGA-580 Brass Valve, Made in the USA.

MODEL 23202



WELDING CABLE LUG CONNECTORS

These premium zinc plated copper connectors are easily crimped, swaged, or soldered for years of trouble free service.

Each package includes (2) two connectors.



<u>MODEL</u>	<u>CABLE SIZE</u>	<u>STUD SIZE</u>
23220	#8	#10
23221	#6	1/4"
22030	#4	5/16"
23222	#4	3/8"
22029	#2	5/16"
23223	#2	3/8"
23224	#1	3/8"
23226	#1/0	3/8"
23225	#1/0	1/2"
23228	#2/0	3/8"
23227	#2/0	1/2"
23229	#3/0	1/2"
23230	#4/0	1/2"

WELDING CABLE BUTT CONNECTORS - UNINSULATED

These premium zinc plated copper connectors are easily crimped, swaged, or soldered for years of trouble free service.

Each package includes (2) two connectors.



<u>MODEL</u>	<u>DESCRIPTION</u>
23007	#6 BUTT CONNECTOR
23008	#4 BUTT CONNECTOR
23009	#2 BUTT CONNECTOR
23010	#1/0 BUTT CONNECTOR
23011	#2/0 BUTT CONNECTOR



HAMMER STYLE CABLE CRIMPING TOOL

For cable lugs and butt connectors

MODEL 23255

WELDING CABLE

Heavy Duty welding cable designed for maximum flexibility and resistance to cuts, tears, and abrasion. Conductors are bare, annealed electrolytic copper, 30 AWG Class K rope lay stranding. Outer jacket is type TPE which provides oil, water, acid, and gas resistance and provides maximum flexibility from -49° C to 105° C. 600V Rating. Made in the USA.



<u>MODEL</u>	<u>DESCRIPTION</u>
23150	#4 WELDING CABLE, 250' REEL, 420 STRANDS
23153	#2 WELDING CABLE, 250' REEL, 665 STRANDS
23151	#1 WELDING CABLE, 250' REEL, 833 STRANDS
23152	#1/0 WELDING CABLE, 150' REEL, 1045 STRANDS
23154	#2/0 WELDING CABLE, 150' REEL, 1330 STRANDS



#4 cable is rated for 100 amps up to 75'.
 #2 cable is rated for 150 amps up to 100'.
 #1 cable is rated for 200 amps up to 250'.
 #1/0 cable is rated for 300 amps up to 50' or 100 amps up to 150'.
 #2/0 cable is rated for 350 amps up to 50' or 100 amps up to 200'.



#2 TO #6 WELDING CABLE INSULATED SPLICER

MODEL 23003



WELDING CABLE CAM LOCK CONNECTORS

<u>MODEL</u>	<u>DESCRIPTION</u>
23001	#1 TO #4 CONNECTOR
23002	#1/0 TO #4/0 CONNECTOR



ELECTRODE HOLDERS

<u>MODEL</u>	<u>DESCRIPTION</u>
22022	200 AMP ELECTRODE HOLDER
23025	300 AMP ELECTRODE HOLDER
23026	400 AMP ELECTRODE HOLDER, SCREW TYPE



STEEL GROUND CLAMPS

Strong clamping power for good grounding of electrical circuits.

<u>MODEL</u>	<u>DESCRIPTION</u>
23081	300 AMP STEEL GROUND CLAMP, UP TO #2
23082	500 AMP STEEL GROUND CLAMP, UP TO #1/0



300 AMP BRASS ALLOY GROUND CLAMP, UP TO #2 CABLE
Very heavy duty clamp for discerning welders.

MODEL 23080



STRAIGHT HEAD CHIPPING HAMMER

MODEL 22023



CONE AND CROSS CHISEL CHIPPING HAMMER
Cross-Peen Style

MODEL 23012



CHIPPING HAMMER WITH BRUSH

MODEL 23013

REPLACEMENT BRUSH MODEL 26053

MIG WELDING WIRE

Gas Metal Arc Welding (GMAW), or commonly called by its subcategory Metal Inert Gas (MIG) Welding, is the most common industrial welding process due to its versatility, speed, and ease of use. Hot Max offers a wide range of MIG welding wire to cover most of your welding needs. You will find our MIG welding wire to be of exceptional quality. We also offer different alloys and larger containers by special order.

MIG WELDING WIRE - MILD STEEL

ER 70S-6 Alloy is a high strength wire which produces excellent results even on rusty or dirty steel.

Tensile Strength: 70,000 PSI

Shielding Gas: Pure CO₂, 75% CO₂/25% Argon (C-25)

Machine Polarity: DCEP Reverse Polarity (MIG DC +)



<u>MODEL</u>	<u>DESCRIPTION</u>
22082	.025", 2# MILD STEEL MIG WIRE
23100	.025", 11# MILD STEEL MIG WIRE
22083	.030", 2# MILD STEEL MIG WIRE
23101	.030", 11# MILD STEEL MIG WIRE
23102	.030", 33# MILD STEEL MIG WIRE
22084	.035", 2# MILD STEEL MIG WIRE
23103	.035", 11# MILD STEEL MIG WIRE
23104	.035", 33# MILD STEEL MIG WIRE
23105	.045", 33# MILD STEEL MIG WIRE



MIG WELDING WIRE - FLUX CORE

E71T-GS Alloy is a high strength flux core wire which produces a deep penetrating weld without shielding gas. Excellent in outdoor windy conditions.

Tensile Strength: 80,000 PSI

Shielding Gas: None Required but 75% CO2/25% Argon (C-25) will reduce spatter.

Machine Polarity: DCEN Straight Polarity (MIG DC -)

<u>MODEL</u>	<u>DESCRIPTION</u>
23111	.030", 2# FLUX CORE MIG WIRE
23106	.030", 10# FLUX CORE MIG WIRE
23112	.035", 2# FLUX CORE MIG WIRE
23107	.035", 10# FLUX CORE MIG WIRE



MIG WELDING WIRE - STAINLESS STEEL

ER308 Alloy is a high strength wire for use with most grades of stainless steel including 301, 302, 304, 308, 321, and 347.

Tensile Strength: 80,000 PSI

Shielding Gas: Pure Argon or Argon/CO2

Machine Polarity: DCEP Reverse Polarity (MIG DC +)

<u>MODEL</u>	<u>DESCRIPTION</u>
23109	.030", 2# STAINLESS STEEL MIG WIRE



MIG WELDING WIRE - ALUMINUM

4043 and 5356 alloys are high strength wire for use with most grades of aluminum.

Tensile Strength: 34,000 PSI for ER 4043, 62,000 PSI for ER 5356

Shielding Gas: Pure Argon

Machine Polarity: DCEP Reverse Polarity (MIG DC +)

<u>MODEL</u>	<u>DESCRIPTION</u>
23113	.030", 1# ALUMINUM MIG WIRE (ER 4043)
23114	.035", 1# ALUMINUM MIG WIRE (ER 4043)
23115	.030", 1# ALUMINUM MIG WIRE (ER 5356)
23108	.035", 1# ALUMINUM MIG WIRE (ER 5356)



Shielded Metal Arc Welding (SMAW), or commonly called Arc Welding or Stick Welding, is one of the world's most popular forms of welding mainly due to its versatility and simplicity. Hot Max offers a wide range of welding rods to suit the various needs of welders everywhere. Our 1, 5, and 10 pound reusable plastic tubes keep the welding rod dry and ready to use. We also carry 1/2 pound packs, for small welding projects or specialty rods, and 50 pound boxes for people who really like to weld. You will find our ARC welding rods to be of exceptional quality. We offer other alloys by special order.

E6011 ARC WELDING ELECTRODES

All purpose, all position rod for mild steel. Great on rusty or dirty metal or poor fit ups. Designed for repair and maintenance work. 60,000 PSI tensile strength. Recommended Machine Polarity: AC or DCEP (DC+)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23301	3/32"	1/2#	40-75
23033	3/32"	1#	40-75
22071	3/32"	5#	40-75
23034	3/32"	10#	40-75
23302	1/8"	1/2#	75-130
23030	1/8"	1#	75-130
22072	1/8"	5#	75-130
23031	1/8"	10#	75-130
23032	1/8"	50#	75-130
23035	5/32"	1#	130-180
23037	5/32"	5#	130-180
23036	5/32"	10#	130-180
23038	5/32"	50#	130-180

ARC WELDING ELECTRODES



E6010 ARC WELDING ELECTRODES

All purpose, all position rod for mild steel. Great on rusty, dirty, or painted metal. Very versatile and forgiving welding rod.

60,000 PSI tensile strength.

Recommended Machine Polarity: DCEP (DC+)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23162	1/8"	10#	65-130
23163	1/8"	50#	65-130
23164	5/32"	10#	110-170
23165	5/32"	50#	110-170

E6013 ARC WELDING ELECTRODES

All purpose, all position rod for mild steel. Best on new, clean steel, especially light gauge metal. Easy to start at low amperage and good appearance weld. 60,000 PSI tensile strength.

Recommended Machine Polarity: AC or DCEP (DC+)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23303	1/16"	1/2#	20-40
22075	1/16"	1#	20-40
23078	1/16"	5#	20-40
22073	5/64"	1#	40-60
22074	5/64"	5#	40-60
23304	3/32"	1/2#	40-75
22076	3/32"	1#	40-75
22077	3/32"	5#	40-75
23075	3/32"	10#	40-75
23042	3/32"	50#	40-75
23305	1/8"	1/2#	75-130
23039	1/8"	1#	75-130
22078	1/8"	5#	75-130
23040	1/8"	10#	75-130
23041	1/8"	50#	75-130
23306	5/32"	1/2#	130-180
23043	5/32"	1#	130-180
23045	5/32"	5#	130-180
23044	5/32"	10#	130-180
23070	5/32"	50#	130-180

E7014 ARC WELDING ELECTRODES

Iron powder coated rod for mild steel and high speed. Provides a flat smooth bead in all positions. Great weld appearance and works well on poor fit ups. 70,000 PSI tensile strength.
Recommended Machine Polarity: AC or DCEN (DC-)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23307	3/32"	1/2#	40-75
23049	3/32"	1#	40-75
23050	3/32"	5#	40-75
23308	1/8"	1/2#	75-130
22081	1/8"	1#	75-130
23047	1/8"	5#	75-130
23046	1/8"	10#	75-130
23048	1/8"	50#	75-130

E7018 ARC WELDING ELECTRODES

Low hydrogen rod works great on hardened steels including cold rolled, high carbon, or high sulphur steels. Joins hard to weld steels easily in any position. Excellent rod for fillet welds. 70,000 PSI tensile strength.
Recommended Machine Polarity: DCEP (DC+) or AC

MODEL	DIAMETER	WEIGHT	AMPERAGE
23309	3/32"	1/2#	40-75
23056	3/32"	1#	40-75
22079	3/32"	5#	40-75
23072	3/32"	10#	40-75
23310	1/8"	1/2#	75-130
23053	1/8"	1#	75-130
22080	1/8"	5#	75-130
23054	1/8"	10#	75-130
23055	1/8"	50#	75-130
23057	5/32"	1#	130-180
23059	5/32"	5#	130-180
23058	5/32"	10#	130-180
23060	5/32"	50#	130-180



99% NICKEL ARC WELDING ELECTRODES

Designed for use on all grades of gray cast iron. Works best on light gauge metal. Weld will have excellent machinability. 55,000 PSI tensile strength.

Recommended Machine Polarity: DCEN (DC-)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23315	3/32"	1/2#	70-90
23062	3/32"	1#	70-90
23316	1/8"	1/2#	80-120
23061	1/8"	1#	80-120

55% NICKEL ARC WELDING ELECTRODES

All position rod designed for use on all grades of cast iron. Good for building up worn areas and has good machinability. 70,000 PSI tensile strength.

Recommended Machine Polarity: AC or DCEN (DC-)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23313	3/32"	1/2#	45-75
23066	3/32"	1#	45-75
23314	1/8"	1/2#	70-110
23065	1/8"	1#	70-110

E312-16 STAINLESS STEEL ARC WELDING ELECTRODES

Ultimate rod designed for use on all grades of steel, including dissimilar metals. This rod can also be used on hardened, armored, and spring steels. Excellent rod that can be used by almost anyone. 120,000 PSI tensile strength.

Recommended Machine Polarity: AC or DCEN (DC-)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23312	3/32"	1/2#	30-70
23064	3/32"	1#	30-70
23074	3/32"	5#	30-70
23311	1/8"	1/2#	60-110
23063	1/8"	1#	60-110
23073	1/8"	5#	60-110

HARD FACING OVERLAY ARC WELDING ELECTRODES

All position rod designed for surface build up/overlay. Good abrasion resistance and excellent impact resistance. Can be forged.

Recommended Machine Polarity: AC or DCEP (DC+)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23068	5/32"	1#	120-180
23069	5/32"	5#	120-180

E4043 ALUMINUM ARC WELDING ELECTRODES

All position rod for all types of aluminum including tubes, sheet, cast, and wrought aluminum. AWS A5.3 Class E4043 is the highest strength alloy for ARC and gas torch welding.

Can be used with gas torch applications as a brazing alloy.

Recommended Machine Polarity: DCEN (DC-)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23076	1/8"	1#	80-135
23077	1/8"	5#	80-135

NICKEL FREE CAST IRON WELDING ELECTRODES

For dirty, heat-affected, and oily cast iron. Can be used for cladding contaminated cast iron before joining with nickel alloys. Not machinable.

Recommended Machine Polarity: AC or DCEP (DC+)

MODEL	DIAMETER	WEIGHT	AMPERAGE
23317	1/8"	1/2#	70-125
23160	1/8"	1#	70-125
23161	1/8"	5#	70-125



DELUXE RED ROD STORAGE CONTAINER

Screw on lid and rubber gasket provide air-tight storage for your rod. It has one internal removable divider and will hold up to 10 pounds of 14" long rod.

MODEL 22028

TIG FILLER ROD



AWS 5.9 CLASS ER309L STAINLESS STEEL TIG FILLER

For most types of stainless steel and dissimilar metals
Less than .03% carbon for corrosion resistance

<u>MODEL</u>	<u>DESCRIPTION</u>
24187	1/16" ER309L STAINLESS TIG FILLER, 1#
24190	1/16" ER309L STAINLESS TIG FILLER, 10#

AWS 5.18 CLASS ER70S-6 MILD STEEL TIG FILLER

For most types of mild steel.

<u>MODEL</u>	<u>DESCRIPTION</u>
24188	1/16" ER70S-6 MILD STEEL TIG FILLER, 1#
24191	1/16" ER70S-6 MILD STEEL TIG FILLER, 10#

AWS 5.10 CLASS ER4043 ALUMINUM TIG FILLER

For most types of aluminum alloys.
Contains 5% silicon for improved fluidity

<u>MODEL</u>	<u>DESCRIPTION</u>
24189	1/16" ER4043 ALUMINUM TIG FILLER, 1#
24192	1/16" ER4043 ALUMINUM TIG FILLER, 5#



HEAVY DUTY 50 AMP CROWFOOT PLUG
250 VOLT RATED, NEMA 10-50P

MODEL 23120



HEAVY DUTY 50 AMP CROWFOOT RECEPTACLE
250 VOLT RATED, NEMA 10-50R

MODEL 23121



HEAVY DUTY 50 AMP PARALLEL BLADE PLUG
PIN-TYPE, 250 VOLT RATED, NEMA 6-50P

MODEL 23123



HEAVY DUTY 50 AMP PARALLEL BLADE RECEPTACLE
PIN-TYPE, 250 VOLT RATED, NEMA 6-50R

MODEL 23124



REVERSIBLE WELDING CAPS, ONE SIZE FITS ALL
Flame Retardant Cotton caps come in a variety of colors.

MODEL 23145



DOO RAG CAPS - ASSORTED COLORS

MODEL 23146



FLAME RETARDANT COTTON WELDER'S APRON
For light welding or grinding. 24" X 42"

MODEL 23142



FLAME RETARDANT COTTON WELDER'S JACKET
Large lightweight jacket for light welding or grinding. Heavy duty
snaps down front and at cuffs. One size fits all.

MODEL 23143

500,000 BTU PROPANE TORCH KIT MODEL 500G

WITH IDLE BOOST/FUEL SAVER VALVE®

The Big Max torch is the premier large propane torch on the market. The Big Max now comes with our Idle Boost/Fuel Saver Valve® which allows you to adjust the flame down to a minimum then depress the handle which will allow full flow through the valve while the handle is depressed. Hot Max torches are the only propane torches with a molded handle, which is our registered trademark, for better control and comfort. The Big Max comes **fully assembled** and ready to use. The Big Max uses standard LP tanks (up to 40# tanks). 1 Year Limited Warranty.

FEATURES

- Burns brush and starts fires with clean and efficient LP gas eliminating caustic chemicals in the environment and around sensitive plants
- Melts snow and ice
- Removes parking lot markings and other paint removal
- Thaws frozen pipes and equipment
- Heats metal and branding irons
- Melts tar and asphalt

KIT INCLUDES THE FOLLOWING COMPONENTS:

- 500,000 BTU propane torch with molded handle, 36"
- Solid brass Idle Boost/Fuel Saver Valve®
- 10 Foot LP gas hose, 350 PSI rated, UL/ CSA listed hose
- NEW QCC-1 "Tool-less" tank connector with integral POL safety valve
- Single flint striker for easy lighting
- Instructions
- ***(Propane tank is NOT included.)



Model 500G ships 6/carton in a full color display. Model 500G-B come individually boxed. Same great torch but two ways to order them!

500,000 BTU PROPANE TORCH KIT MODEL 50100

Our new propane torch is a basic propane torch with a lot of features. We understand that not everyone wants a top of the line model like the Big Max and maybe looking for a more cost effective torch. Hot Max torches are the only propane torches with a molded handle, which is our registered trademark, for better control and comfort. The Hot Max Model 50100 propane torch uses standard LP tanks (up to 40# tanks).

FEATURES

- Burns brush and starts fires with clean and efficient LP gas eliminating caustic chemicals in the environment and around sensitive plants
- Melts snow and ice
- Removes parking lot markings and other paint removal
- Thaws frozen pipes and equipment
- Heats metal and branding irons
- Melts tar and asphalt

KIT INCLUDES THE FOLLOWING COMPONENTS:

- 500,000 BTU propane torch with molded handle, 36" long
- Solid brass needle valve
- 10 Foot LP gas hose, 350 PSI rated, UL/ CSA listed hose
- NEW QCC-1 "Tool-less" tank connector with integral POL safety valve

***(Propane Tank is NOT included.)



LITTLE MAX TORCH



50,000 BTU PROPANE TORCH KIT MODEL 50G

The Little Max torch is the premier medium sized propane torch on the market. The Hot Max torches are the only propane torches with a molded handle, which is our registered trademark, for better control and comfort. The Little Max comes with everything you need for small projects, except the tank. The Little Max uses standard LP tanks (up to 40# tanks).

FEATURES

- Burns brush and starts fires with clean and efficient LP gas eliminating caustic chemicals in the environment and around sensitive plants
- Melts snow and ice
- Great charcoal starter
- Removes parking lot markings and other paint removal
- Thaws frozen pipes and equipment
- Heats metal and branding irons
- Melts tar and asphalt

KIT INCLUDES THE FOLLOWING COMPONENTS:

- 50,000 BTU propane torch with molded handle
- Solid brass adjusting valve
- 10 Foot LP gas hose, 350 PSI rated, UL/CSA listed hose
- POL valve has safety excess flow valve (CGA-510 tank connection)
- 18 PSI pressure regulator
- Safety stand
- Single flint striker for easy lighting
- Instructions
- ***(Propane tank is NOT included.)



500,000 BTU PROPANE TORCH KIT MODEL 50200

Our newest propane torch is a basic propane torch with a lot of features. We understand that not everyone wants a top of the line model like the Big Max and maybe looking for a more cost effective torch which is also a little smaller. The Hot Max Model 50200 propane torch uses standard LP tanks (up to 40# tanks).

FEATURES

- Burns brush and starts fires with clean and efficient LP gas eliminating caustic chemicals in the environment and around sensitive plants
- Melts snow and ice
- Removes parking lot markings and other paint removal
- Thaws frozen pipes and equipment
- Heats metal and branding irons
- Melts tar and asphalt

KIT INCLUDES THE FOLLOWING COMPONENTS:

- 500,000 BTU propane torch with molded grip, 24" long
- Needle valve and boost valve
- 6.5' Foot LP gas hose, 350 PSI rated UL listed hose
- POL valve has safety excess flow valve (CGA-510 tank connection)
- ***(Propane tank is NOT included.)






SELF LIGHTING GARDEN TORCH MODEL GTORCH

Great for small projects around the home like lighting charcoal or a fire pit, camping, and more!

FEATURES:

- 36" Lightweight torch with foam grip
- Self lighting igniter
- Solid brass adjustable valve
- 18,000 BTU/hr
- Uses 14-16 oz. liquid propane tank (Tank NOT included)

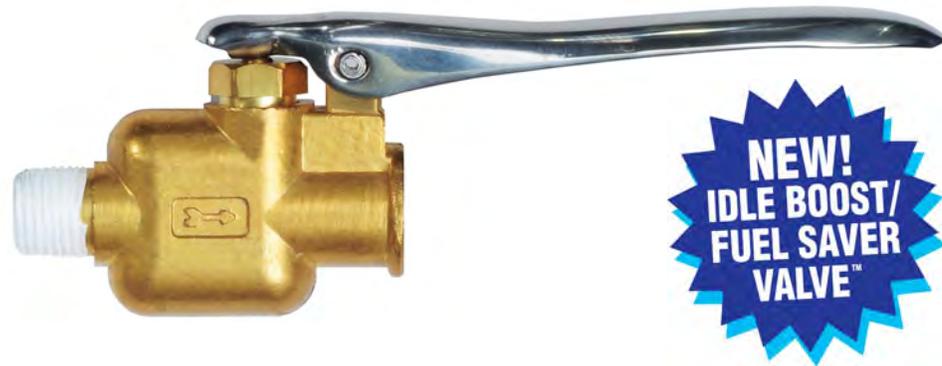


IDLE BOOST/FUEL SAVER VALVE® MODEL 24206

Convert your old style Big Max 500G torch to a fuel saver torch!

FEATURES:

- Solid brass needle valve and body, chrome handle
- 1/4" Male B-fitting inlet, 1/4" NPT (female) outlet
- Convert old style Big Max Torches (500,000 BTU)
- Burns at low flame with needle valve, hit Idle Boost/Fuel Saver Valve® for full BTU flame
- Needle valve also controls flame without the boost valve

HOW IT WORKS

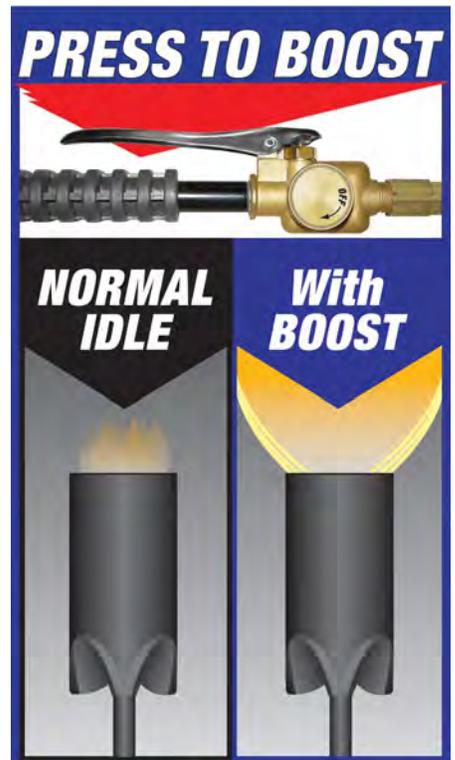



HOT MAX DUAL PURPOSE CART MODEL 100MC

FEATURES

Designed for Hot Max Big Max (Model 500G), Jr Max (Model 100G), Little Max (Model 50G), our new economy torch (Model 50100), and Mobile Max (Model MM-1) torch kits. All steel construction is strong and durable. Holds 20# or 40# LP tanks or Mobile Max tote. 10" air tires are great even in rough terrain. The cart has safety holders for hot torches and J-hooks for the hoses.



Model 100MC with MM-1 Mobile Max
Torch Kit



Model 100MC with Model 50100 Propane
Torch Kit



350 PSI RATED PROPANE GAS HOSES
 UL/CSA Listed Hose (5/16" ID) with all Brass Fittings
 Works with all Hot Max torches and most other manufacturers' torches

<u>MODEL</u>	<u>DESCRIPTION</u>
24217	5' Extension Hose, 1/4" NPT Male x 1/4" Female Flared B (Male NPT adapter now included!)
24200	10' Extension Hose, 1/4" NPT Male x 1/4" Female Flared B (Male NPT adapter now included!)
24201	25' Extension Hose, 1/4" NPT Male x 1/4" Female Flared B (Male NPT adapter now included!)
24212	10' Replacement Hose, 1/4" Female Flared B Fittings on both ends

TIP: 1/4-Inch Female Flared B (also called a Ball Seat Female Pipe Swivel Fitting) is not exactly the same as a 1/4" female NPT fitting. Our female fittings have a brass cone on the inside which helps seal the connection without the use of teflon tape or pipe dope. If you need an adapter for use with NPT fittings, use Hot Max Model 28100 Ball Socket to NPT adapter to convert the female end of these hoses to male NPT fittings.

*These hoses can be used with natural gas appliances but due to the low pressure of natural gas and the relatively small diameter of these hoses, these hoses should only be used for appliances requiring less than 40,000 BTU/hr.

**SOLID BRASS NEEDLE VALVE**

1/4" Male NPT x 1/4" female NPT

For use with standard propane and natural gas appliances for precise flow control

350 PSI rated

MODEL 24209

**SOLID BRASS POL SAFETY VALVE**

1/4" Male NPT fitting x propane tank connection (CGA 510 internal left hand threads)

For use with standard propane tanks

For appliances using less than 600,000 BTU/hr.

MODEL 24203

BEST USE PRACTICES / TROUBLE SHOOTING

POL Safety valves are designed to reduce the gas flow of propane if excessive gas flow is detected. Excessive gas flow can be caused by a damaged or malfunctioning appliance or hose. The POL Safety valve may also detect excessive flow if the valve on the propane tank is opening too quickly. If you suspect the POL Safety valve has shut off the flow of propane due to the tank valve being opened too quickly (the safety valve has engaged when only minimal amounts of propane pass through the valve), close the tank valve all the way closed, unthread the POL Safety valve from the tank valve to release the gas pressure, reinstall the POL Safety valve into the tank valve and tighten with a wrench, and then slowly open the tank valve.

**TYPE 1 ACME TANK COUPLING NUT WITH INTEGRAL POL SAFETY VALVE**

For Type 1 (QCC-1®) Gas Grill Systems ACME Coupling x 1/4" NPT Male

For use with standard propane tanks

MODEL

24216

24218

DESCRIPTION

QCC-1 for appliances using less than 200,000 BTU/hr.

QCC-1 for appliances using less than 500,000 BTU/hr.

*24218 is replacement for large propane torches!



LOW PRESSURE STANDARD REGULATOR

1/2 PSI Regulator for use on gas grills, heaters, smokers, etc.

1/4" NPT (Female) Inlet and Outlet, UL/CSA Listed

For use with standard propane and natural gas appliances using less than 80,000 BTU/hr.

MODEL 24204



HIGH PRESSURE REGULATOR

15 PSI Regulator for use on turkey fryers, smokers, stoves, etc.

1/4" NPT (Female) Inlet and Outlet, UL/CSA Listed

For use with standard propane and natural gas appliances using less than 134,200 BTU/hr.

MODEL 24215



LITTLE MAX REPLACEMENT REGULATOR

18 PSI Regulator

1/4" NPT (Female) Inlet and Outlet, UL/CSA Listed

For applications using less than 134,200 BTU/hr.

MODEL 24202



ADJUSTABLE REGULATOR

0-10 PSI Adjustable Regulator for use on smokers, turkey fryers, etc.

1/4" NPT (Female) Inlet, 1/8" NPT (Female) Outlet, UL/CSA Listed

For applications using less than 140,000 BTU/hr

For use with standard propane and natural gas appliances

MODEL 24208



DISPOSABLE PROPANE CYLINDER ADAPTER
Connects disposable propane cylinders to Acme Tank Coupling
or POL Safety Valve
Solid Brass Construction
1" - 20 Female Thread to POL / Acme Thread
For use with standard disposable propane cylinders (not included)

MODEL 24211

HOW IT WORKS



COMMERCIAL HIGH PRESSURE ADJUSTABLE REGULATOR
5-30 PSI Regulator with 1/4" NPT (Female) Output
Type 1 Acme Tank Connector with POL Safety Valve
For applications using less than 180,000 BTU/hr.
For use with standard propane tanks

MODEL 24210



LOW PRESSURE PROPANE KIT
3' UL/CSA Listed Hose with 3/8" Female B-Fitting for gas grills,
smokers, and other low pressure appliances
11" WC Regulator, UL/CSA Listed
Type 1 Acme Tank Connector with POL Safety Valve
For applications using less than 140,000 BTU/hr.
For use with standard propane tanks

MODEL 24214



LOW PRESSURE PROPANE KIT
10' UL/CSA Listed Hose with 3/8" Female B-Fitting for gas grills,
smokers, and other low pressure appliances
1/2 PSI Regulator, 3/8" NPT, UL/CSA Listed
POL Safety Valve tank connection
For use with standard propane tanks

MODEL 24205



HOT MAX MOBILE MAX OXY-ACETYLENE TORCH KIT MODEL MM-1

The Hot Max MM-1 Mobile Max is a complete oxy-acetylene welding and cutting kit. The Victor® Style medium duty torch handle and cutting head are all brass and stainless steel construction. The heavy duty molded tote is lightweight and mobile, yet durable. Built in storage compartment makes it easy to keep cutting tips, nozzles, striker, tank wrench, and all your other small parts close at hand and it keeps them from getting lost. Welds up to 1/4"* mild steel, cuts up to 4"* mild steel, or easily silver solders up to 3/4" copper.

2 Year Limited Warranty

*Larger tips are required for cutting/welding material this thick, sold separately.

KIT INCLUDES THE FOLLOWING COMPONENTS:

Heavy Duty Molded Tote Carrier (Model MM-0 if ordered separately)

20 Cubic Foot (R Size) Refillable Oxygen Tank** (CGA-540)

10 Cubic Foot (MC Size) Refillable Acetylene Tank** (CGA-200)

Medium Duty Oxygen and Acetylene Regulators, UL Listed

3/16" X 10' Twin Welding Hose, UL Listed

All Brass and Stainless Victor® Style Torch Handle and Cutting Head, UL Listed

One Cutting Tip: 3-101-1 Victor® Style

One Welding Tip: 1-W-1 Victor® Style

Goggles with #5 Lens

Single Flint Striker

MC Size Tank Wrench

**Tanks are both empty and Made in the USA.



Dual Purpose Red Cart
Model #100MC
Sold Separately.




MEDIUM DUTY CUTTING TORCH KIT - VICTOR® STYLE MODEL VTK-MD

The Hot Max VTK-MD is a complete oxy-acetylene welding and cutting kit. The Victor® Style medium duty torch handle and cutting head are all brass and stainless steel construction. Welds up to 1/2" steel and cuts up to 6" steel (requires larger tips which are not included).
2 Year Limited Warranty

KIT INCLUDES THE FOLLOWING COMPONENTS:

All Brass and Stainless Victor® Style Torch Handle and Cutting Head, UL Approved
Medium Duty Oxygen and Acetylene Regulators, UL Approved
3/16" X 12-1/2' Twin Welding Hose
One Cutting Tip: 3-101-1 Victor® Style
Three Welding Tips: 0-W-1, 2-W-1, and 4-W-1 Victor® Style
One Heating Tip: #8 Rosebud (8MFA-1) Victor® Style
Goggles with #5 Lens
Single Flint Striker
Standard Tip Cleaner Set
Universal Tank Wrench
Plano® Tool Box



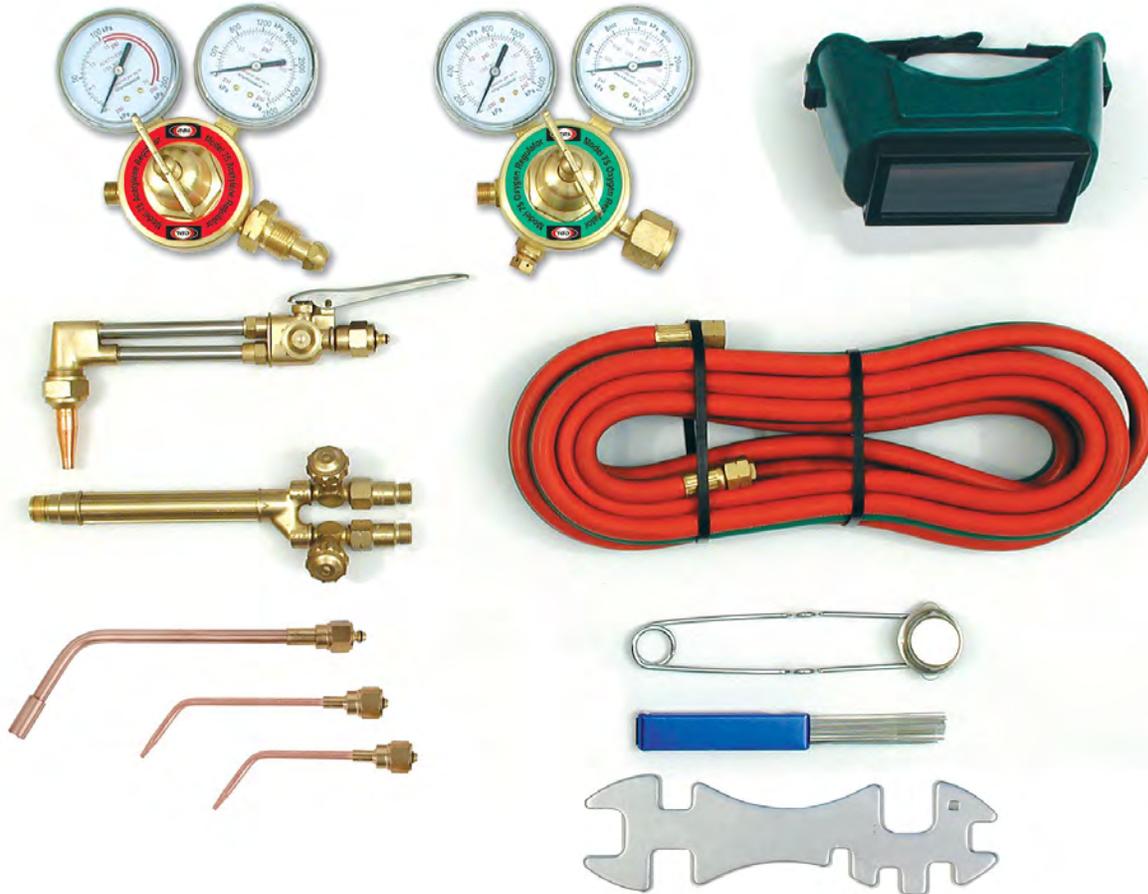

HEAVY DUTY CUTTING TORCH KIT - VICTOR® STYLE MODEL VTK-HD-A

The Hot Max VTK-HD-A is a complete heavy duty oxy-acetylene welding and cutting kit. The Victor® Style heavy duty torch handle and cutting head are all brass and stainless steel construction. Welds up to 1/2" steel and cuts up to 8" steel (requires larger tips which are not included).
2 Year Limited Warranty

KIT INCLUDES THE FOLLOWING COMPONENTS:

All Brass and Stainless Victor® Style Torch Handle and Cutting Head, UL Approved
Heavy Duty Oxygen and Acetylene Regulators, UL Approved
1/4" X 25' Twin Welding Hose
One Cutting Tip: 1-101-1 Victor® Style
Two Welding Tips: 1-W and 3-W Victor® Style
One Heating Tip: #8 Rosebud (8MFA-FS) Victor® Style
Goggles with #5 Lens
Single Flint Striker
Long Tip Cleaner Set
Universal Tank Wrench





MEDIUM DUTY CUTTING TORCH KIT - VICTOR® STYLE MODEL VH-1

The Hot Max VH-1 is a high quality medium duty oxy-acetylene three piece cutting kit. The Victor® Style medium duty torch handle and cutting head are all brass and stainless steel construction. Cuts up to 6" steel (requires larger tips which are not included).

2 Year Limited Warranty

KIT INCLUDES THE FOLLOWING COMPONENTS:

All Brass and Stainless Victor® Style Torch Handle and Cutting Head, UL Approved
One Cutting Tip: 3-101-1 Victor® Style





HEAVY DUTY CUTTING TORCH KIT - VICTOR® STYLE MODEL VHD-1

The Hot Max VHD-1 is a high quality heavy duty oxy-acetylene three piece cutting kit. The Victor® Style heavy duty torch handle and cutting head are all brass and stainless steel construction. Cuts up to 8" steel (requires larger tips which are not included).
2 Year Limited Warranty

KIT INCLUDES THE FOLLOWING COMPONENTS:

All Brass and Stainless Victor® Style Torch Handle and Cutting Head, UL Approved
One Cutting Tip: 1-101-1 Victor® Style



Victor® is a registered trademark of ESAB Corp. KDAR is not affiliated with ESAB Corp. and these products are not manufactured by ESAB.



MEDIUM DUTY CUTTING TORCH KIT - HARRIS® STYLE MODEL HH-1

The Hot Max HH-1 is a high quality medium duty oxy-acetylene three piece cutting kit. The Harris® Style medium duty torch handle and cutting head are all brass and stainless steel construction. Cuts up to 6" steel (requires larger tips which are not included).
2 Year Limited Warranty

KIT INCLUDES THE FOLLOWING COMPONENTS:

All Brass and Stainless Harris® Style Torch Handle and Cutting Head, UL Approved
One Cutting Tip: 6290-1 Harris® Style



Harris® is a registered trademark of Lincoln Electric Company. KDAR is not affiliated with the Lincoln Electric Company and these products are not manufactured by Harris.



VICTOR® STYLE CUTTING TIPS - HEAVY DUTY
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24021	1-101-00 VICTOR® STYLE CUTTING TIP
24020	1-101-0 VICTOR® STYLE CUTTING TIP
22063	1-101-1 VICTOR® STYLE CUTTING TIP
22064	1-101-2 VICTOR® STYLE CUTTING TIP
24022	1-101-3 VICTOR® STYLE CUTTING TIP
24023	1-101-4 VICTOR® STYLE CUTTING TIP



VICTOR® STYLE CUTTING TIPS - HEAVY DUTY
For Natural Gas or Propane

<u>MODEL</u>	<u>DESCRIPTION</u>
24024	1-GPN-0 VICTOR® STYLE CUTTING TIP
24025	1-GPN-1 VICTOR® STYLE CUTTING TIP
24026	1-GPN-2 VICTOR® STYLE CUTTING TIP
24027	1-GPN-3 VICTOR® STYLE CUTTING TIP



VICTOR® STYLE CUTTING TIPS - MEDIUM DUTY
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24028	3-101-00 VICTOR® STYLE CUTTING TIP
22061	3-101-0 VICTOR® STYLE CUTTING TIP
22062	3-101-1 VICTOR® STYLE CUTTING TIP
24029	3-101-2 VICTOR® STYLE CUTTING TIP
24030	3-101-3 VICTOR® STYLE CUTTING TIP
24031	3-101-4 VICTOR® STYLE CUTTING TIP



VICTOR® STYLE CUTTING TIPS - MEDIUM DUTY
For Natural Gas or Propane

<u>MODEL</u>	<u>DESCRIPTION</u>
24032	3-GPN-0 VICTOR® STYLE CUTTING TIP
24033	3-GPN-1 VICTOR® STYLE CUTTING TIP
24034	3-GPN-2 VICTOR® STYLE CUTTING TIP
24035	3-GPN-3 VICTOR® STYLE CUTTING TIP

GAS CUTTING TIPS



HARRIS® STYLE CUTTING TIPS - MEDIUM DUTY For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24040	6290-0 HARRIS® STYLE CUTTING TIP
22065	6290-1 HARRIS® STYLE CUTTING TIP
22066	6290-2 HARRIS® STYLE CUTTING TIP
24044	6290-3 HARRIS® STYLE CUTTING TIP



HARRIS® STYLE CUTTING TIPS - MEDIUM DUTY For Natural Gas or Propane

<u>MODEL</u>	<u>DESCRIPTION</u>
24041	6290-NX-0 HARRIS® STYLE CUTTING TIP
24042	6290-NX-1 HARRIS® STYLE CUTTING TIP
24043	6290-NX-2 HARRIS® STYLE CUTTING TIP



SMITH® STYLE CUTTING TIPS For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24050	MC12-0 SMITH® STYLE CUTTING TIP
24051	MC12-1 SMITH® STYLE CUTTING TIP
24052	MC12-2 SMITH® STYLE CUTTING TIP
24053	MC12-3 SMITH® STYLE CUTTING TIP
24056	SC12-1 SMITH® STYLE CUTTING TIP
24057	SC12-2 SMITH® STYLE CUTTING TIP




SMITH® STYLE CUTTING TIPS For Propane

<u>MODEL</u>	<u>DESCRIPTION</u>
24054	MCP-1 SMITH® STYLE CUTTING TIP
24055	MCP-2 SMITH® STYLE CUTTING TIP

Victor® is a registered trademark of ESAB Corp. KDAR is not affiliated with ESAB Corp. and these products are not manufactured by ESAB--.

Harris® is a registered trademark of Lincoln Electric Company. KDAR is not affiliated with the Lincoln Electric Company and these products are not manufactured by Harris.

Smith® is a registered trademark of Illinois Tool Works. KDAR is not affiliated with the Illinois Tool Works and these products are not manufactured by Smith.

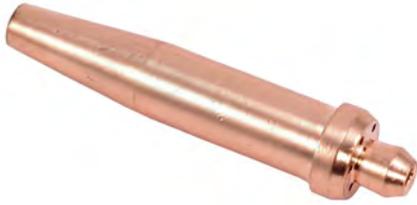

PUROX® STYLE CUTTING TIPS
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24058	4202-3 PUROX® STYLE CUTTING TIP
24059	4202-4 PUROX® STYLE CUTTING TIP



AIRCO® STYLE CUTTING TIPS
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24060	144-1 SIZE 1 AIRCO® STYLE CUTTING TIP
24061	144-1 SIZE 2 AIRCO® STYLE CUTTING TIP



VICTOR® STYLE WELDING NOZZLES - HEAVY DUTY
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24071	SIZE 00 (00-W) VICTOR® STYLE WELDING NOZZLE
24070	SIZE 0 (0-W) VICTOR® STYLE WELDING NOZZLE
24072	SIZE 1 (1-W) VICTOR® STYLE WELDING NOZZLE
24074	SIZE 3 (3-W) VICTOR® STYLE WELDING NOZZLE



VICTOR® STYLE WELDING NOZZLES - MEDIUM DUTY
For Oxy-Acetylene

<u>MODEL</u>	<u>DESCRIPTION</u>
24077	SIZE 00 (00-W-1) VICTOR® STYLE WELD NOZZLE
24076	SIZE 0 (0-W-1) VICTOR® STYLE WELDING NOZZLE
24078	SIZE 1 (1-W-1) VICTOR® STYLE WELDING NOZZLE
22089	SIZE 2 (2-W-1) VICTOR® STYLE WELDING NOZZLE
24079	SIZE 4 (4-W-1) VICTOR® STYLE WELDING NOZZLE

Victor® is a registered trademark of ESAB Corp. KDAR is not affiliated with ESAB Corp. and these products are not manufactured by ESAB-.

Harris® is a registered trademark of Lincoln Electric Company. KDAR is not affiliated with the Lincoln Electric Company and these products are not manufactured by Harris.

Airco® is a registered trademark of Airco Welding Products Div. of BOC Group. KDAR is not affiliated with Airco Welding Products and these products are not manufactured by Airco.

VICTOR® STYLE ROSEBUD HEATING NOZZLES For Oxy-Acetylene



<u>MODEL</u>	<u>DESCRIPTION</u>
24089	SIZE 8 (8MFA-FS) ROSEBUD - HEAVY DUTY
22088	SIZE 6 (6MFA-1) ROSEBUD - MEDIUM DUTY

HARRIS® STYLE WELDING NOZZLES - MEDIUM DUTY For Oxy-Acetylene



<u>MODEL</u>	<u>DESCRIPTION</u>
24085	SIZE 0 (23A90-0) WELDING NOZZLE
24086	SIZE 1 (23A90-1) WELDING NOZZLE
24088	SIZE 3 (23A90-3) WELDING NOZZLE

HARRIS® STYLE ROSEBUD HEATING NOZZLE MEDIUM DUTY For Oxy-Acetylene Size 2 (J-63-2)



MODEL 24091

HARRIS® STYLE E-43 GAS TIP MIXER MEDIUM DUTY For Oxy-Acetylene



MODEL 24092

Purox® is a registered trademark of ESAB Welding and Cutting Products. KDAR is not affiliated with ESAB Welding and Cutting Products and these products are not manufactured by Purox.

Smith® is a registered trademark of Illinois Tool Works. KDAR is not affiliated with the Illinois Tool Works and these products are not manufactured by Smith.



FLUX COATED BRONZE BRAZING RODS

Excellent quality, easy flowing, low fuming brazing rod for nearly all your brazing needs. 65,000 PSI tensile strength. Melting Point: 1,600° F (871° C). Made in USA. Meets AWS A5.8 - RBCuAn-C and AWS A5.27 - RBCuZn-C

MODEL	DIAMETER	LENGTH	WEIGHT
22068	3/32"	18"	6/PK
22070	1/8"	18"	6/PK
24180	3/32"	36"	12/PK
24182	3/32"	36"	10 Pounds
24181	1/8"	36"	6/PK
24183	1/8"	36"	10 Pounds

LOW FUMING BARE BRONZE BRAZING RODS

Copper and zinc alloy ideally suited for sheet metal, tubing, and cast iron. These rods do require flux in some applications. 65,000 PSI tensile strength. Melting Point: 1,600° F (871° C). Made in USA. Meets AWS A5.8 - RBCuAn-C and AWS A5.27 - RBCuZn-C

MODEL	DIAMETER	LENGTH	WEIGHT
24004	3/32"	36"	12/PK
24005	1/8"	36"	6/PK
24006	1/8"	36"	10 Pounds

MILD STEEL GAS BRAZING/WELDING RODS

General purpose copper coated mild steel brazing rod for all low carbon steels. Made in USA. AWS A5.2 CLASS R45

MODEL	DIAMETER	LENGTH	WEIGHT
24001	1/16"	36"	1 Pound
24002	3/32"	36"	1 Pound
24003	1/8"	36"	1 Pound

BRAZING ROD AND FLUX



BARE ALUMINUM BRAZING/WELDING RODS

Works well on most kinds of sheet and cast aluminum. These rods can be used with TIG welding machines or with gas torches. When using a gas torch, aluminum flux is required. 27,000 PSI tensile strength. Melting Point: 1,170° F (632° C). Made in USA.
AWS 5.10 Class ER4043

MODEL	DIAMETER	LENGTH	WEIGHT
24008	1/8"	36"	12/PK



ALUMINUM BRAZING RODS, NO FLUX REQUIRED

For aluminum and zinc based metals including aluminum/magnesium alloys. Working temp 710° F. 1/8" x 18". 1/2 pound reusable storage container. Made in USA.

MODEL 24185



COPPER/BRASS BRAZING RODS

No flux required for copper to copper connections. For copper to brass or bronze connections, flux is required. This alloy is a cost effective alternative to copper-silver brazing rods. Not for iron or nickel alloy metals. Working temp 1,300° F. 1/8" x 18". 1/2 pound reusable storage container. Made in USA.

MODEL 24186



ALUMINUM BRAZING FLUX, 1/4 LB

Formulated specifically for torch brazing aluminum and normally used with 4047, 4043, or 1100 brazing filler alloy. Can also be used for furnace and automatic flame brazing operations. Contains zinc chloride. Made in USA.

MODEL 24184



BRAZING FLUX POWDER – 8 OZ

For all types of steel, malleable and cast iron, galvanized metals, brass, and bronze. Made in USA. AWS A5.31-91 Type FB3J

Typical use technique: Clean base metal thoroughly. Dip end of filler metal into the flux. Flux residue is water soluble.

MODEL 24000





ACID FLUX CORE SOLDER

Excellent quality general purpose solder. Not for electrical connections or potable water.

MODEL	DIAMETER	WEIGHT	GRADE
24150	1/8"	1/4#	40/60

LEAD FREE SOLDER

Excellent quality tin-antimony lead free solder. For use in potable water systems and refrigeration. Not for electrical connections.

MODEL	DIAMETER	WEIGHT	GRADE
24153	1/8"	1/4#	95/5
24154	1/8"	1/2#	95/5
24155	1/8"	1#	95/5

ROSIN FLUX CORE SOLDER

Excellent quality solder for electrical connections.

MODEL	DIAMETER	WEIGHT	GRADE
24156	1/16"	1/4#	60/40
24157	3/32"	1/4#	40/60
24159	1/8"	1#	40/60

SOLDER AND ACCESSORIES



SOLID WIRE SOLDER

Excellent quality general purpose solder. Not for electrical connections or potable water. Flux required.

MODEL	DIAMETER	WEIGHT	GRADE
24161	1/8"	1/2#	50/50
24162	1/8"	1#	40/60
24177*	1/8"	1#	60-40

24177* is for Stained Glass applications



PLUMBING KIT - SOLDER, FLUX, AND BRUSHES
 Kit includes 1/8" x 1/4# Lead Free Solder (Model 24153),
 2 Oz Soldering Paste Flux (Model 24171),
 And three flux brushes (Model 26055)

MODEL 24178



SOLDERING PASTE FLUX - 2 OZ
 Contains zinc chloride. Made in USA.

MODEL 24171



SELF FLUXING SOFT SILVER SOLDER, LEAD FREE
 Approximately 1/2 OZ

MODEL 24163



30 WATT ELECTRIC SOLDERING IRON, 120V

MODEL 24164

OXY-ACETYLENE HOSE REPAIR KITS

Includes (1) barbed nipple, (1) left hand thread nut, (1) right hand thread nut, and (1) ferrule. "B" Size fittings. Solid Brass Construction.



<u>MODEL</u>	<u>DESCRIPTION</u>
24122	1/4" HOSE REPAIR KIT
24123	3/16" HOSE REPAIR KIT

OXY-ACETYLENE HOSE FERRULES



<u>MODEL</u>	<u>DESCRIPTION</u>
24125	1/4" HOSE FERRULES, 4/PK
24126	3/16" HOSE FERRULES, 4/PK



OXY-ACETYLENE HOSE CRIMPING TOOL

Locking Plier Type

MODEL 24124



OXY-ACETYLENE HOSE NUTS

Standard "B" Fittings, Solid Brass Construction.

<u>MODEL</u>	<u>DESCRIPTION</u>
24127	ACETYLENE HOSE NUTS, LH THREAD, 2/PK
24128	OXYGEN HOSE NUTS, RH THREAD, 2/PK

OXY-ACETYLENE BARBED HOSE SPLICER

Solid Brass Construction.



<u>MODEL</u>	<u>DESCRIPTION</u>
24129	1/4" BARBED HOSE SPLICER, 1/PK
24130	3/16" BARBED HOSE SPLICER, 1/PK



OXY-ACETYLENE HOSE COUPLER/UNION SET

Includes one left hand thread union and one right hand thread union. Standard "B" fittings for 1/4" or 3/16" hose. Solid Brass Construction.

MODEL 24131



OXY-ACETYLENE FLASHBACK ARRESTOR SET

Flashback arrestor set has internal check valves for both oxygen and acetylene. Standard "B" fittings for 1/4" or 3/16" hoses. REGULATOR END CONNECTION.

MODEL 24010



OXY-ACETYLENE FLASHBACK ARRESTOR SET

Flashback arrestor set has internal check valves for both oxygen and acetylene. Standard "B" fittings for 1/4" or 3/16" hoses. TORCH END CONNECTION.

MODEL 24011



OXYGEN REGULATOR OUTPUT CONNECTOR

For use with Victor® Style Regulators. 1/4" NPT x 9/16" RH thread. Solid Brass Construction.

MODEL 24220



ACETYLENE REGULATOR OUTPUT CONNECTOR

For use with Victor® Style Regulators. 1/4" NPT x 9/16" LH thread. Solid Brass Construction.

MODEL 24221



CGA-540 OXYGEN REGULATOR INLET NUT
For use with Victor® Style Regulators. Solid Brass Construction.

MODEL 24222



CGA-510 ACETYLENE REGULATOR INLET NUT
For use with Victor® Style Regulators. Solid Brass Construction.

MODEL 24223



CGA-540 OXYGEN REGULATOR INLET SWIVEL
For use with Victor® Style Regulators. Solid Brass Construction.

MODEL 24224



CGA-510 ACETYLENE REGULATOR INLET SWIVEL
For use with Victor® Style Regulators. Solid Brass Construction.

MODEL 24225



BRASS GAUGES
2" Dial Faces, 1/4" NPT Threads, Brass Case

<u>MODEL</u>	<u>DESCRIPTION</u>
24102	30 PSIG, ACETYLENE ONLY GAUGE
24100	100 PSIG, ALL GAS GAUGE
24101	200 PSIG, ALL GAS GAUGE
24103	400 PSIG, ALL GAS GAUGE
24104	4000 PSIG, ALL GAS GAUGE

REGULATORS



OXY-ACETYLENE REGULATORS - LIGHT DUTY 2" Dial Faces

<u>MODEL</u>	<u>DESCRIPTION</u>
24140	2-15 PSIG ACETYLENE REGULATOR (CGA-510)
24141	4-60 PSIG OXYGEN REGULATOR (CGA-540)



OXY-ACETYLENE REGULATORS - MEDIUM DUTY 2" Dial Faces

<u>MODEL</u>	<u>DESCRIPTION</u>
24142	2-15 PSIG ACETYLENE REGULATOR (CGA-510)
24143	4-80 PSIG OXYGEN REGULATOR (CGA-540)



OXY-ACETYLENE REGULATORS - HEAVY DUTY 2" Dial Faces

<u>MODEL</u>	<u>DESCRIPTION</u>
24145	2-15 PSIG ACETYLENE REGULATOR (CGA-510)
24144	2-125 PSIG OXYGEN REGULATOR (CGA-540)



OXY-ACETYLENE REGULATORS - VERY HEAVY DUTY 2" Dial Faces

<u>MODEL</u>	<u>DESCRIPTION</u>
24147	2-15 PSIG ACETYLENE REGULATOR (CGA-510)
24146	2-125 PSIG OXYGEN REGULATOR (CGA-540)

OXY-ACETYLENE HOSES, GRADE “R”
 Standard “B” Fittings, All Brass fittings and ferrels
 Grade R is for use with oxygen and acetylene only!



<u>MODEL</u>	<u>DESCRIPTION</u>
24113	1/4” x 12.5’, OXY-ACETYLENE HOSE, GRADE R
22067	1/4” X 25’, OXY-ACETYLENE HOSE, GRADE R
24110	1/4” X 50’, OXY-ACETYLENE HOSE, GRADE R
24111	3/16” X 12.5’, OXY-ACETYLENE HOSE, GRADE R
24112	3/16” X 25’, OXY-ACETYLENE HOSE, GRADE R

OXY-ACETYLENE HOSES, GRADE “T”
 Standard “B” Fittings, All Brass fittings and ferrels
 Grade T is for use with oxygen and alternative fuels like liquid or gas propane, natural gas, and propylene. Grade T can still be used with acetylene.

<u>MODEL</u>	<u>DESCRIPTION</u>
24114	1/4” X 25’, OXY-ACETYLENE HOSE, GRADE T
24115	1/4” X 50’, OXY-ACETYLENE HOSE, GRADE T



10 CF (MC SIZE) ACETYLENE CYLINDER, EMPTY
 CGA-200 Brass Valve, Made in USA.

MODEL 24012



20 CF (R SIZE) OXYGEN CYLINDER, EMPTY
 CGA-540 Brass Valve, Made in USA.

MODEL 24013



Victor® is a registered trademark of ESAB Corp. KDAR is not affiliated with ESAB Corp. and these products are not manufactured by ESAB-.

Harris® is a registered trademark of Lincoln Electric Company. KDAR is not affiliated with the Lincoln Electric Company and these products are not manufactured by Harris.

Airco® is a registered trademark of Airco Welding Products Div. of BOC Group. KDAR is not affiliated with Airco Welding Products and these products are not manufactured by Airco.

Smith® is a registered trademark of Illinois Tool Works. KDAR is not affiliated with the Illinois Tool Works and these products are not manufactured by Smith.

Purox® is a registered trademark of ESAB Welding and Cutting Products. KDAR is not affiliated with ESAB Welding and Cutting Products and these products are not manufactured by Purox.

KDAR Company is not affiliated with or endorsed by the aforementioned registered trademark companies.




SINGLE FLINT STRIKER
MODEL 22031



SINGLE FLINT REPLACEMENTS, 5/PK
MODEL 22032



SINGLE FLINT STRIKER WITH 5 REPLACEMENT FLINTS
MODEL 24172



TRIPLE FLINT STRIKER
MODEL 22033




TRIPLE FLINT REPLACEMENTS, 1/PK
MODEL 24173



STANDARD TIP CLEANER SET
13 Stainless Steel Tip Cleaners Size #6 Through 26, and File

MODEL 22034

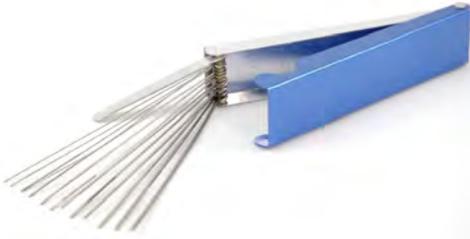

LONG TIP CLEANER SET
13 Stainless Steel Tip Cleaners Size #6 Through 26, and File

MODEL 24175



DRILL TYPE TIP CLEANER SET
12 Drill Tips Sizes 52-74

MODEL 24176



UNIVERSAL TANK WRENCH

MODEL 22024



TYPE "MC" ACETYLENE CYLINDER TANK WRENCH

MODEL 24174

WELDING HELMETS



4-1/2" X 5-1/4" WIDE VISION WELDING HELMET
FIXED FRONT, #10 SHADE

MODEL 22087



90 X 110 MM WIDE VISION WELDING HELMET
FLIP FRONT, #10 SHADE

MODEL 25027



2" X 4-1/4" WELDING HELMET
FIXED FRONT, #10 SHADE

MODEL 25025



2" X 4-1/4" WELDING HELMET
FLIP FRONT, #10 SHADE

MODEL 25026



AUTO DARKENING WELDING HELMETS

2 Sensor, Fixed Front, Variable Shade (9-13), Adjustable Delay, Fast Switching (.005 Seconds), Solar Powered With Battery Backup (Battery NOT replaceable), 1-1/2" x 3-1/2" View Area
2 Year Limited Warranty

<u>MODEL</u>	<u>DESCRIPTION</u>
25084	EAGLE AUTO DARKENING WELDING HELMET
25085	FLAME AUTO DARKENING WELDING HELMET
25086	RED/BLUE AUTO DARKENING WELING HELMET
25087	BASIC BLACK AUTO DARKENING WELDING HELMET

AUTO DARK WELDING HELMET REPLACEMENT PARTS FOR MODELS 25084 –25087

<u>MODEL</u>	<u>DESCRIPTION</u>
25090	REPLACEMENT AUTO DARKENING LENS
25089	REPLACEMENT OUTSIDE PROTECTIVE COVER LENS
25088	REPLACEMENT INSIDE PROTECTIVE COVER LENS
25091	REPLACEMENT HEADGEAR



AUTO DARKENING WELDING HELMET - **NEW!**

2 Sensor, Fixed Front, Variable Welding Shade (9 to 13), Fixed Grinding/Cutting Shade (4), Adjustable Delay, Fast Switching, Solar Powered With Replaceable Backup CR2450 Battery, 3.64 x 1.67" View Area, 2 Year Limited Warranty

MODEL 25092



PREMIUM AUTO DARKENING WELDING HELMET - **NEW!**
4 Sensor, Fixed Front, Variable Welding Shade (9 to 13), Variable Grinding/Cutting Shade (5 to 9), Adjustable Delay, Fast Switching, Solar Powered With Replaceable Backup CR2450 Battery, 3.94 x 2.64" View Area, 2 Year Limited Warranty

MODEL 25093



2 X 4-1/4" AUTO DARK WELDING HELMET LENS - **NEW!**
2 Sensor, Fixed Welding Shade (11), Fixed Grinding/Cutting Shade (3), Fast Switching, Solar Powered, 3.55 x 1.35" View Area, 1 Year Limited Warranty

TURN ANY 2X4" HELMET INTO AN AUTO DARK HELMET!

MODEL 25097



REPLACEMENT RATCHETING HEADGEAR FOR ALL NON AUTO DARKENING HOT MAX WELDING HELMETS

Will also fit many other manufacturers' helmets.

MODEL 25028



2" X 4-1/4" WELDING HELMET REPLACEMENT LENSES

<u>MODEL</u>	<u>DESCRIPTION</u>
25052	#5 BRAZING SHADE - Fits Brazing Goggles
25053	#8 HELMET SHADE
25040	#9 HELMET SHADE
22045	#10 HELMET SHADE
25041	#11 HELMET SHADE
25042	#12 HELMET SHADE
22046	CLEAR POLYCARBONATE SAFETY LENS



WIDE VISION WELDING HELMET REPLACEMENT LENSES

<u>MODEL</u>	<u>DESCRIPTION</u>
25043	#9 HELMET SHADE, 4-1/2" X 5-1/4"
22047	#10 HELMET SHADE, 4-1/2" X 5-1/4"
25044	#11 HELMET SHADE, 4-1/2" X 5-1/4"
25045	#12 HELMET SHADE, 4-1/2" X 5-1/4"
22048	CLEAR POLYCARBONATE SAFETY LENS, 4-1/2" X 5-1/4"
25054	#10 HELMET SHADE, 90 X 110 MM
25055	CLEAR SAFETY COVER LENS, 90 X 110 MM



WELDING HELMET MAGNIFYING LENSES

<u>MODEL</u>	<u>DESCRIPTION</u>
25050	F-1.5 DIOPTRER, 2" X 4-1/4"
25051	F-2.0 DIOPTRER, 2" X 4-1/4"

GOGGLES AND GLOVES



DELUXE FLIP FRONT BRAZING GOGGLES
#5 SHADE, 2" X 4-1/4" LENS

MODEL 22049



FIXED FRONT BRAZING GOGGLES
#5 SHADE, 2" X 4-1/4" LENS

MODEL 25030



EYE CUP STYLE BRAZING GOGGLES
#5 SHADE, 50 MM LENS

MODEL 25031



LIGHT DUTY LEATHER WORK GLOVES, MAN'E LARGE
100% Full grain cowhide leather. Double stitched in high stress areas.
Premium quality for comfort and durability.

MODEL 25012



ECONOMY GRAY LEATHER LINED WELDING GLOVES
Full Grain cowhide split leather with Kevlar stitching for added strength. Cotton lining for heat resistance and moisture absorption.

MODEL 22050



PREMIUM BROWN LEATHER LINED WELDING GLOVES
Full Grain cowhide split leather with Kevlar stitching for added strength. Cotton lining for heat resistance and moisture absorption.

MODEL 22051



LIGHTWEIGHT SAFETY GLASSES #5 SHADE
ANSI Z87.1 APPROVED

MODEL 25064



FULL FACE CLEAR GRINDING SHIELD WITH RATCHETING HEAD GEAR
ANSI Z87.1 APPROVED
MODEL 25001



REPLACEMENT CLEAR GRINDING SHIELD - NO HEADGEAR
ANSI Z87.1 APPROVED
MODEL 25002

REPLACEMENT TINTED GRINDING SHIELD - NO HEADGEAR
ANSI Z87.1 APPROVED
MODEL 25003

Model 25003 shown.



DELUXE HEARING PROTECTION WITH HEAD STRAP
MODEL 25020



REUSABLE SILICON EAR PLUGS WITH CORD AND CASE
MODEL 25022



E-Z SANDER® HAND SANDER MODEL 26190

Are you tired of ripping off a piece of sandpaper from a full sheet? Sick of shoving a strip of sandpaper under a rubber block hoping the nails will hold it in place? The end result is wasted time, wasted money, and a lot of frustration. The answer is the E-Z Sander. The E-Z Sander is a new patented (US Patent # 7,201,646) sanding block made from a high-impact plastic to make hand sanding easy. By simply turning the side thumb wheels, the unit quickly and easily tightens the wet/dry sanding belt and holds it in place for project big or small. Loosening the thumb wheels allows the belt to be rotated around to use all parts of the belt or to be removed and replaced with another belt. The molded unit is just the right size to fit in your hand and the molded grips on the side make it easy to hold - even if your hands are tired from work. Great for around the house, work, automotive, or anywhere!

FEATURES

High impact plastic for long life, 6-1/4" long x 2.5" wide x 1" tall
Delrin thumb wheels tension belt for easy use and quick removal
Wet/Dry sanding belts allow them to be used in many different applications
Black anodized aircraft aluminum screws for durability
Molded grips make it easy to hold
Several different replacement sanding belt grits for any project - 80, 120, 220, 320, 1000, and 1500 grits available

KIT INCLUDES:

E-Z Sander® Molded Hand Sander
Three wet/dry sanding belts (1 each) - 80, 120, and 220 grits
Instructions

REPLACEMENT E-Z SANDER WET/DRY SANDING BELTS, 3/PK



<u>MODEL</u>	<u>DESCRIPTION</u>
26191	2.5" X 14" 80 GRIT WET/DRY BELT, 3/PK
26192	2.5" X 14" 120 GRIT WET/DRY BELT, 3/PK
26193	2.5" X 14" 220 GRIT WET/DRY BELT, 3/PK
26194	2.5" X 14" 320 GRIT WET/DRY BELT, 3/PK
26195	2.5" X 14" 1000 GRIT WET/DRY BELT, 3/PK
26196	2.5" X 14" 1500 GRIT WET/DRY BELT, 3/PK



ALUMINUM OXIDE BENCH WHEELS

MODEL	WHEEL SIZE	ARBOR	GRIT
26000	6" Diameter, 3/4" Wide	1"	36 GRIT - COARSE
26001	6" Diameter, 3/4" Wide	1"	60 GRIT - MEDIUM
26002	6" Diameter, 3/4" Wide	1"	80 GRIT - FINE
26003	6" Diameter, 1" Wide	1"	36 GRIT - COARSE
26005	6" Diameter, 1" Wide	1"	80 GRIT - FINE
26006	8" Diameter, 1" Wide	1"	36 GRIT - COARSE
26007	8" Diameter, 1" Wide	1"	60 GRIT - MEDIUM



REDUCING BUSHINGS FOR 3/4" AND 1" BENCH WHEELS
 Five bushings are included with these OD (outside diameters): 1-1/8", 1", 7/8", 3/4", and 5/8". The smallest bushing has ID (inside diameter) of 1/2". One bushing set included (two shown for clarity) per package.

MODEL 26009



TYPE 1 CUT OFF WHEELS FOR STEEL

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
22003	3"	1/32"	3/8"	25,000
22001	3"	1/16"	1/4"	25,000
22002	3"	1/16"	3/8"	25,000
26015	3"	1/8"	1/4"	25,000
26016	3"	1/8"	3/8"	25,000
26017	4"	1/32"	3/8"	17,000
26245	4"	.040"	5/8"	19,100
22004	4"	1/16"	3/8"	17,000
22005	4"	1/16"	5/8"	18,000
26018	4"	1/8"	3/8"	19,000
26296	4-1/2"	.040"	7/8"	13,300
26030	4-1/2"	.045"	7/8"	13,300
22006	4-1/2"	1/16"	7/8"	18,000
26243	4-1/2"	.080"	7/8"	13,500
26019	4-1/2"	1/8"	7/8"	13,000
26244	5"	1/16"	7/8"	12,200
26020	6"	.040"	7/8"	10,000
26021	7"	1/8"	5/8" DIAMOND HOLE	8,750
26246	10"	3/32"	1"	6,100
26247	10"	1/8"	5/8"	6,100
26022	12"	3/32"	1"	4,500
26279	12"	5/32"	20 MM	6,400
26280	12"	5/32"	1"	6,300
22007*	14"	3/32"	1"	4,366
26023	14"	5/32"	1"	4,500
26249	14"	5/32"	20 MM	5,500

GRINDING WHEELS



TYPE 27 HUBLESS GRINDING WHEELS FOR STEEL

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
22009	4"	1/8"	5/8"	13,700
22008	4"	1/4"	5/8"	13,700
26031	4-1/2"	1/8"	7/8"	13,700
22010	4-1/2"	1/4"	7/8"	13,700
22011	5"	1/4"	7/8"	12,000
26032	7"	1/4"	7/8"	8,500
26035	9"	1/4"	7/8"	6,500



TYPE 27 GRINDING WHEELS WITH HUBS FOR STEEL

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
26231	4-1/2"	1/8"	5/8" - 11 NC	13,300
22013	4-1/2"	1/4"	5/8" - 11 NC	13,300
26033	7"	1/8"	5/8" - 11 NC	8,500
22012	7"	1/4"	5/8" - 11 NC	8,500
26034	9"	1/4"	5/8" - 11 NC	6,500



TYPE 1 CUT OFF WHEELS FOR MASONRY

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
26271	4"	1/16"	5/8"	15,200
26272	4-1/2"	1/16"	7/8"	13,300
26025	7"	1/8"	5/8" DIAMOND HOLE	8,732
26248	12"	1/8"	1"	5,000
26281	12"	5/32"	20 MM	6,400
26282	12"	5/32"	1"	6,300
26284	14"	5/32"	20 MM	5,400
26285	14"	5/32"	1"	5,400
26250*	14"	3/16"	1"	4,300

26250* is designed for walk behind road saw for concrete and asphalt.



TYPE 27 GRINDING WHEELS FOR MASONRY

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
26274	4"	1/4"	5/8"	15,200
26233	4-1/2"	1/4"	7/8"	13,300
26234	7"	1/4"	5/8" - 11 NC	8,500

SPECIALTY WHEELS



TYPE 27 CUTTING WHEELS

MODEL	DIAMETER	THICKNESS	ARBOR	FOR METAL	MAX RPM
26240	4-1/2"	.045"	7/8"	STEEL	13,500
26241	4-1/2"	.045"	7/8"	STAINLESS STEEL	13,500
26242	4-1/2"	.045"	7/8"	ALUMINUM	13,500



TYPE 27 GRINDING WHEELS FOR ALUMINUM

MODEL	DIAMETER	THICKNESS	ARBOR	MAX RPM
26232	4-1/2"	1/4"	7/8"	13,300



PREMIUM DIAMOND CUT OFF BLADES

For dry cutting stone including granite, marble, and tile. Leaves a much smoother finished edge than normal abrasives. For use with grinders and circular saws.

MODEL
26290
26291
26292

DESCRIPTION
4" DIAMOND CUT OFF, 5/8" TO 7/8" ARBOR
4-1/2" DIAMOND CUT OFF, 5/8" TO 7/8" ARBOR
7" DIAMOND CUT OFF, 5/8" TO 7/8" ARBOR

WIRE BRUSHES



TOOTH BRUSH STYLE WIRE BRUSHES - WOOD HANDLES
7-3/4" Overall Length

<u>MODEL</u>	<u>DESCRIPTION</u>
22035	3X7 STAINLESS STEEL WIRE BRUSH
22037	3X7 BRASS WIRE BRUSH



TOOTH BRUSH STYLE WIRE BRUSHES - PLASTIC HANDLES
7-3/4" Overall Length

<u>MODEL</u>	<u>DESCRIPTION</u>
26209	7-3/4" STAINLESS STEEL WIRE BRUSH
26210	7-3/4" BRASS WIRE BRUSH
22044	3 PACK BRUSH SET WITH STAINLESS STEEL, BRASS, AND PLASTIC BRISTLES



CURVED HANDLE WIRE BRUSHES - WOOD HANDLES
8-5/8" Overall Length

<u>MODEL</u>	<u>DESCRIPTION</u>
22036	2X9 STAINLESS STEEL WIRE BRUSH
22038	2X9 BRASS WIRE BRUSH



5" INDUSTRIAL BRASS WIRE BRUSH, PLASTIC HANDLE

MODEL 26211



SHOE HANDLE WIRE BRUSHES - WOOD HANDLES
10-1/4" Overall Length

<u>MODEL</u>	<u>DESCRIPTION</u>
22040	4X16 CARBON STEEL WIRE BRUSH
26052	4X16 STAINLESS STEEL WIRE BRUSH
26213	4X16 BRASS WIRE BRUSH

WIRE BRUSHES



WIRE BRUSHES - WOOD HANDLES
13-3/4" Overall Length



<u>MODEL</u>	<u>DESCRIPTION</u>
22039	3X19 CARBON STEEL WIRE BRUSH
22041	3X19 STAINLESS STEEL WIRE BRUSH

3X19 CARBON STEEL WIRE BRUSH WITH SCRAPER
13-3/4" Overall Length



MODEL 26050

4X16 CARBON STEEL SHOE HANDLE WIRE BRUSH WITH SCRAPER
10-1/4" Overall Length



MODEL 26051

REPLACEMENT BRUSH FOR CHIPPING HAMMER



MODEL 26053

POLY FILL PARTS CLEANING BRUSH, NYLON BRISTLES
10-1/2" Overall Length



MODEL 22042

NYLON TUBE BRUSH WITH WIRE LOOP HANDLE
Great for cleaning bottles, hoses, etc.



<u>MODEL</u>	<u>DESCRIPTION</u>
26207	8-1/2" X 1/2" NYLON TUBE BRUSH
26200	8-1/2" X 3/4" NYLON TUBE BRUSH
26208	15-1/2" X 1-1/4" NYLON TUBE BRUSH



6" X 5/8" WIRE FITTING BRUSH

Steel bristles for cleaning copper fittings, tubing, or battery terminals.

MODEL 26201



WIRE FITTING BRUSH WITH PLASTIC HANDLES

Steel bristles for cleaning copper fittings. 4-3/4" long.

<u>MODEL</u>	<u>DESCRIPTION</u>
--------------	--------------------

26202	1/2" WIRE FITTING BRUSH, PLASTIC HANDLE
26203	3/4" WIRE FITTING BRUSH, PLASTIC HANDLE



WIRE FITTING BRUSH FOR POWER TOOLS

Stainless steel bristles for cleaning copper fittings. 4" long.

<u>MODEL</u>	<u>DESCRIPTION</u>
--------------	--------------------

26205	1/2" SS WIRE FITTING POWER BRUSH
26204	3/4" SS WIRE FITTING POWER BRUSH



5-1/4" X 1-1/2" WIRE BRUSH WITH LOOP HANDLE

Steel bristles.

MODEL 26206



FLUX BRUSHES

4-1/4" Overall Length

<u>MODEL</u>	<u>DESCRIPTION</u>
--------------	--------------------

26055	FLUX BRUSHES - 3/PK
26054	FLUX BRUSHES - 120/PK

CUP BRUSHES



CUP BRUSHES Crimped Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26287	2-3/4", .012" WIRE, M10 X 1.25 ARBOR
26060	3", .020" WIRE, 5/8"-11NC ARBOR
26062	4", .020" WIRE, 5/8"-11NC ARBOR
26064	5", .020" WIRE, 5/8"-11NC ARBOR



CUP BRUSHES Single Row Knotted Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26288	2-3/4", .012" WIRE, M10 X 1.25 ARBOR
22021	3", .020" WIRE, 5/8"-11NC ARBOR
26063	4", .020" WIRE, 5/8"-11NC ARBOR
26065	6", .020" WIRE, 5/8"-11NC ARBOR



CUP BRUSHES Single Row Knotted Wire, Stainless Steel, 5/8" - 11NC Arbor

<u>MODEL</u>	<u>DESCRIPTION</u>
26061	3", .020" WIRE, 5/8"- 11NC ARBOR



MOUNTED CUP BRUSHES Crimped Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26070	1-1/2", .020" WIRE, 1/4" HEX SHANK
22020	2-1/2", .020" WIRE, 1/4" HEX SHANK
26071	2-1/2", .012" WIRE, 1/4" HEX SHANK
26218	3", .012" WIRE, 1/4" HEX SHANK



MOUNTED END BRUSHES
Crimped Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
22019	3/4", .020" WIRE, 1/4" ROUND SHANK
26220	1", .008" WIRE, 1/4" HEX SHANK
26221	1", .012" WIRE, 1/4" HEX SHANK
26072	1", .020" WIRE, 1/4" ROUND SHANK



MOUNTED END BRUSHES
Knotted Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26074	3/4", .020" WIRE, 1/4" ROUND SHANK
26073	1-1/8", .020" WIRE, 1/4" ROUND SHANK



WIRE WHEELS, HUBLESS
Crimped Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26080	4" X 1/2", .020" WIRE, 5/8" - 11NC ARBOR
26224	4" X 1/2", .012" WIRE, 1/2" ARBOR
26223	5" X 1/2", .012" WIRE, 5/8" ARBOR
26082	6" X 1/2", .020" WIRE, 1/2" ARBOR
26226	6" X 3/4", .012" WIRE, 1/2" - 5/8" ARBOR
26081	6" X 1", .020" WIRE, 1/2" ARBOR
26253	8" X 1", .012" WIRE, 1/2" - 5/8" ARBOR
26083	8" X 1-1/4", .020" WIRE, 1/2" - 5/8" ARBOR



WIRE WHEELS WITH HUBS
Stringer Bead, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26084	4" STRINGER BEAD, 5/8"-11NC ARBOR
26085	6" STRINGER BEAD, 5/8"-11NC ARBOR

WHEELS AND EMERY CLOTH



WIRE WHEELS, HUBLESS
Twist Knot, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26087	6" TWIST KNOT, 1/2" - 5/8" ARBOR



WIRE WHEELS WITH HUBS
Twist Knot, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
26289	4" TWIST KNOT, M10 X 1.25 ARBOR
26086	4" TWIST KNOT, 5/8"-11NC ARBOR
26088	6" TWIST KNOT, 5/8"-11NC ARBOR



MOUNTED WIRE WHEELS
Crimped Wire, Carbon Steel

<u>MODEL</u>	<u>DESCRIPTION</u>
22015	1-1/2", .020" WIRE, 1/4" HEX SHANK
22016	2", .020" WIRE, 1/4" HEX SHANK
26219	2-1/2", .012" WIRE, 1/4" HEX SHANK
22017	3", .020" WIRE, 1/4" HEX SHANK
22018	3", .012" WIRE, 1/4" HEX SHANK
26222	4", .012" WIRE, 1/4" HEX SHANK



EMERY CLOTH, 25 YARD ROLL
Aluminum oxide abrasive

<u>MODEL</u>	<u>DESCRIPTION</u>
26090	80 GRIT, 1" X 18 YARDS
22014	120 GRIT, 1" X 25 YARDS
26091	180 GRIT, 1" X 25 YARDS
26092	320 GRIT, 1" X 25 YARDS



QUICK CHANGE MINI ABRASIVE SANDING DISC
For use with backing pads. Sold in eaches with no packaging.

<u>MODEL</u>	<u>DESCRIPTION</u>
26332	2" SANDING DISC, 40 GRIT ZIRCONIUM
26333	2" SANDING DISC, 80 GRIT ZIRCONIUM
26334	3" SANDING DISC, 40 GRIT ZIRCONIUM
26335	3" SANDING DISC, 80 GRIT ZIRCONIUM



QUICK CHANGE MINI ABRASIVE FLAP DISC
For use with backing pads. Sold in eaches with no packaging.

<u>MODEL</u>	<u>DESCRIPTION</u>
26336	2" FLAP DISC, 40 GRIT ZIRCONIUM
26337	2" FLAP DISC, 80 GRIT ZIRCONIUM
26338	3" FLAP DISC, 40 GRIT ZIRCONIUM
26339	3" FLAP DISC, 80 GRIT ZIRCONIUM



QUICK CHANGE MINI ABRASIVE SURFACE PREP DISC
For use with backing pads. Sold in eaches with no packaging.

<u>MODEL</u>	<u>DESCRIPTION</u>
26341	2" SURFACE PREP DISC, MEDIUM GRIT
26342	2" SURFACE PREP DISC, COARSE GRIT
26344	3" SURFACE PREP DISC, MEDIUM GRIT
26345	3" SURFACE PREP DISC, COARSE GRIT



QUICK CHANGE MINI ABRASIVE BACKING PAD
Packaged in a clam pack.

<u>MODEL</u>	<u>DESCRIPTION</u>
26330	2" BACKING PAD, 1/4" SHANK
26331	3" BACKING PAD, 1/4" SHANK

QUICK CHANGE WHEELS



HOT MAX MINI ABRASIVE BIN MERCHANDISER MODEL 26901

QTY	MODEL	DESCRIPTION
15	26332	2" MINI ABRASIVE SANDING DISC, Z40 GRIT
15	26333	2" MINI ABRASIVE SANDING DISC, Z80 GRIT
8	26334	3" MINI ABRASIVE SANDING DISC, Z40 GRIT
8	26335	3" MINI ABRASIVE SANDING DISC, Z80 GRIT
10	26336	2" MINI ABRASIVE FLAP DISC, Z40 GRIT
10	26337	2" MINI ABRASIVE FLAP DISC, Z80 GRIT
5	26338	3" MINI ABRASIVE FLAP DISC, Z40 GRIT
5	26339	3" MINI ABRASIVE FLAP DISC, Z80 GRIT
10	26341	2" MINI ABRASIVE SURFACE PREP, MED. GRIT
10	26342	2" MINI ABRASIVE SURFACE PREP, COARSE GRIT
5	26344	3" MINI ABRASIVE SURFACE PREP, MED. GRIT
5	26345	3" MINI ABRASIVE SURFACE PREP, COARSE GRIT
6	26330	2" MINI ABRASIVE BACKING PAD (IN CLAM PACK)
6	26331	3" MINI ABRASIVE BACKING PAD (IN CLAM PACK)



FLAP DISCS, TYPE 29, 5/8" - 11NC ARBOR, ZIRCONIUM

<u>MODEL</u>	<u>DESCRIPTION</u>
26093	4-1/2", 36 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM
26094	4-1/2", 60 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM
26103	4-1/2", 80 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM
26104	4-1/2", 120 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM
26101	7", 36 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM
26102	7", 60 GRIT, 5/8"-11NC ARBOR, ZIRCONIUM



FLAP DISCS, TYPE 29, HUBLESS, ALUMINUM OXIDE

<u>MODEL</u>	<u>DESCRIPTION</u>
26095	4-1/2", 36 GRIT, 7/8" ARBOR, ALUM OXIDE
26096	4-1/2", 60 GRIT, 7/8" ARBOR, ALUM OXIDE
26097	4-1/2", 80 GRIT, 7/8" ARBOR, ALUM OXIDE
26098	7", 36 GRIT, 7/8" ARBOR, ALUM OXIDE
26099	7", 60 GRIT, 7/8" ARBOR, ALUM OXIDE
26100	7", 80 GRIT, 7/8" ARBOR, ALUM OXIDE



FLAP DISCS, TYPE 29, HUBLESS, BLUE ZIRCONIUM

<u>MODEL</u>	<u>DESCRIPTION</u>
26276	4", 40 GRIT, 5/8" ARBOR, ZIRCONIUM
26277	4", 60 GRIT, 5/8" ARBOR, ZIRCONIUM
26278	4", 80 GRIT, 5/8" ARBOR, ZIRCONIUM
26297	4-1/2", 40 GRIT, 7/8" ARBOR, ZIRCONIUM
26298	4-1/2", 60 GRIT, 7/8" ARBOR, ZIRCONIUM
26299	4-1/2", 80 GRIT, 7/8" ARBOR, ZIRCONIUM
26252	4-1/2", 120 GRIT, 7/8" ARBOR, ZIRCONIUM


SANDING DISCS, ALUMINUM OXIDE



<u>MODEL</u>	<u>DESCRIPTION</u>
26120	4", 16 GRIT, 7/8" HOLE, 3/PK
26121	4", 24 GRIT, 7/8" HOLE, 3/PK
26122	4", 36 GRIT, 7/8" HOLE, 3/PK
26123	4", 50 GRIT, 7/8" HOLE, 3/PK
26124	4", 80 GRIT, 7/8" HOLE, 3/PK
26125	4", 100 GRIT, 7/8" HOLE, 3/PK
26126	4", 120 GRIT, 7/8" HOLE, 3/PK
26130	5", 16 GRIT, 7/8" HOLE, 3/PK
26131	5", 24 GRIT, 7/8" HOLE, 3/PK
26132	5", 36 GRIT, 7/8" HOLE, 3/PK
26133	5", 50 GRIT, 7/8" HOLE, 3/PK
26134	5", 80 GRIT, 7/8" HOLE, 3/PK
26135	5", 100 GRIT, 7/8" HOLE, 3/PK
26136	5", 120 GRIT, 7/8" HOLE, 3/PK
26140	7", 16 GRIT, 7/8" HOLE, 3/PK
26141	7", 24 GRIT, 7/8" HOLE, 3/PK
26142	7", 36 GRIT, 7/8" HOLE, 3/PK
26143	7", 50 GRIT, 7/8" HOLE, 3/PK
26144	7", 80 GRIT, 7/8" HOLE, 3/PK
26145	7", 100 GRIT, 7/8" HOLE, 3/PK
26146	7", 120 GRIT, 7/8" HOLE, 3/PK

See backing pads on page 80.

FLAP WHEELS, ALUMINUM OXIDE PACKAGED (Unpackaged Bulk Part Numbers in Parenthesis)

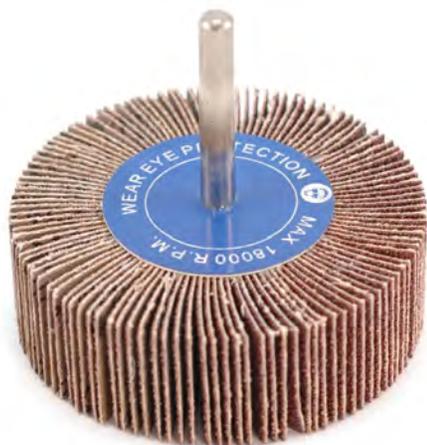

<u>MODEL</u>	<u>DESCRIPTION</u>
26111	1"X1", 60 GRIT FLAP WHEEL (26310)
26112	1"X1", 80 GRIT FLAP WHEEL (26311)
26110	1"X1", 120 GRIT FLAP WHEEL (26312)
26113	1-1/2"X1/2", 60 GRIT FLAP WHEEL (26313)
26114	1-1/2"X1/2", 80 GRIT FLAP WHEEL (26314)
N/A	1-1/2"X1/2", 120 GRIT FLAP WHEEL (26315)
26115	2"X1", 60 GRIT FLAP WHEEL (26316)
26116	2"X1", 80 GRIT FLAP WHEEL (26317)
N/A	2"X1", 120 GRIT FLAP WHEEL (26318)
26117	3"X1", 60 GRIT FLAP WHEEL (26319)
26118	3"X1", 80 GRIT FLAP WHEEL (26320)
N/A	3"X1", 120 GRIT FLAP WHEEL (26321)



1" BALL MOUNTED POINT, TYPE A25
1/4" Round Shank, Aluminum Oxide

MODEL 26150



1" X 1" CYLINDER MOUNTED POINT, TYPE A38
Concave Top, 1/4" Round Shank, Aluminum Oxide

MODEL 26151



1" X 1/2" CYLINDER MOUNTED POINT, TYPE W218
Flat Top, 1/4" Round Shank, Aluminum Oxide

MODEL 26153



1" X 1-1/4" CONE MOUNTED POINT, TYPE A2
1/4" Round Shank, Aluminum Oxide

MODEL 26154



1/4" X 1-1/16" CONE MOUNTED POINT, TYPE A15
1/4" Round Shank, Aluminum Oxide

MODEL 26155



1/4" X 3/4" CYLINDER MOUNTED POINT, TYPE A24
Rounded top, 1/4" Round Shank, Aluminum Oxide

MODEL 26156



1-1/4" X 1-1/4" CONE MOUNTED POINT, TYPE A4
1/4" Round Shank, Aluminum Oxide

MODEL 26157



3/4" X 1" MOUNTED BALL MOUNTED POINT, TYPE A23
1/4" Round Shank, Aluminum Oxide

MODEL 26158

ABRASIVES



3/4" X 1-1/4" CONE MOUNTED POINT, TYPE A12
1/4" Round Shank, Aluminum Oxide

MODEL 26159



3/4" X 1-1/8" CONE MOUNTED POINT, TYPE A5
1/4" Round Shank, Aluminum Oxide

MODEL 26160



1/2" BALL ROTARY FILE
1/4" Round Shank, Tool Steel Construction

MODEL 26165



1/2" X 7/8" 14 DEGREE ANGLE CONE ROTARY FILE
1/4" Round Shank, Tool Steel Construction

MODEL 26166



1/2" X 7/8" CYLINDRICAL BALL NOSE ROTARY FILE
1/4" Round Shank, Tool Steel Construction

MODEL 26167



1/2" X 7/8" CYLINDER ROTARY FILE
1/4" Round Shank, Tool Steel Construction

MODEL 26168



1/2" X 7/8" ROUND TREE ROTARY FILE
1/4" Round Shank, Tool Steel Construction

MODEL 26169



ALUMINUM OXIDE MOUNTED GRINDING WHEELS				
MODEL	DIAMETER	THICKNESS	SHAFT	MAX RPM
26040	1"	1"	1/4" ROUND	3,450
26041	1-1/2"	1"	1/4" ROUND	3,450
26042	2"	1/2"	1/4" ROUND	3,450
26043	2"	1/4"	1/4" ROUND	3,450
26044	2-1/2"	1/2"	1/4" ROUND	3,450
26045	2-1/2"	1/4"	1/4" ROUND	3,450



MANDREL AND CUT OFF WHEEL KIT, 1/4" AND 3/8" ARBORS
Includes Three 3" Type 1 Cut Off Wheels - Model 22001, 22002, and 22003 as well as Mandrel Set

MODEL 26182



MANDREL SET FOR WHEELS WITH 1/4" AND 3/8" ARBORS
(No Cut Off Wheels, Mandrels Only)

MODEL 26181



BACKING PADS FOR SANDING DISCS

<u>MODEL</u>	<u>DESCRIPTION</u>
26178	5" X 5/8"-11NC BACKING PAD W/ SPINDLE NUT
26179	7" X 5/8"-11NC BACKING PAD W/ SPINDLE NUT



ARBOR ADAPTERS

<u>MODEL</u>	<u>DESCRIPTION</u>
26175	5/8"-11NC TO M10X1.25 ARBOR ADAPTER
26176	5/8"-11NC TO M10X1.50 ARBOR ADAPTER



BACKING PAD SPINDLE NUT WRENCH

MODEL 26180



1/8" BALL SHAPE TUNGSTEN CARBIDE BURR (SD-42)
1/8" Shaft, double cut, 100,000 RPM Rated, & Made in USA.

MODEL 27070



1/8" TAPER SHAPE TUNGSTEN CARBIDE BURR (SF-42)
1/8" Shaft, double cut, 100,000 RPM Rated, & Made in USA.

MODEL 27071



1/8" TREE POINT TUNGSTEN CARBIDE BURR (SH-41)
1/8" Shaft, double cut, 100,000 RPM Rated, & Made in USA.

MODEL 27072



1/8" TAPER POINT TUNGSTEN CARBIDE BURR (SM-42)
1/8" Shaft, double cut, 100,000 RPM Rated, & Made in USA.

MODEL 27073



1/4" OVAL SHAPE TUNGSTEN CARBIDE BURR (SE-51)
1/8" Shaft, double cut, 55,000 RPM Rated, & Made in USA.

MODEL 27074



1/8" CYLINDRICAL TUNGSTEN CARBIDE BURR (SA-43)
1/8" Shaft, double cut, 100,000 RPM Rated, & Made in USA.

MODEL 27075

CARBIDE BURRS



1/4" CYLINDRICAL TUNGSTEN CARBIDE BURR (SA-1)
1/4" Shaft, double cut, 55,000 RPM Rated, & Made in USA.

MODEL 27060



3/8" CYLINDRICAL TUNGSTEN CARBIDE BURR (SA-3)
1/4" Shaft, double cut, 37,500 RPM Rated, & Made in USA.

MODEL 27061



1/4" BALL SHAPE TUNGSTEN CARBIDE BURR (SD-1)
1/4" Shaft, double cut, 55,000 RPM Rated, & Made in USA.

MODEL 27062



3/8" BALL SHAPE TUNGSTEN CARBIDE BURR (SD-3)
1/4" Shaft, double cut, 37,500 RPM Rated, & Made in USA.

MODEL 27063



1/4" TREE RADIUS TUNGSTEN CARBIDE BURR (SF-1)
1/4" Shaft, double cut, 55,000 RPM Rated, & Made in USA.

MODEL 27064



3/8" TREE RADIUS TUNGSTEN CARBIDE BURR (SF-3)
1/4" Shaft, double cut, 37,500 RPM Rated, & Made in USA.

MODEL 27065



1/4" TREE POINT TUNGSTEN CARBIDE BURR (SG-1)
1/4" Shaft, double cut, 55,000 RPM Rated, & Made in USA.

MODEL 27066



3/8" TREE POINT TUNGSTEN CARBIDE BURR (SG-3)
1/4" Shaft, double cut, 37,500 RPM Rated, & Made in USA.

MODEL 27067



LOCKING C-CLAMP PLIER, 6"
MODEL 27002

LOCKING C-CLAMP PLIER, 11"
MODEL 22059



LOCKING SHEET METAL PLIER, 8"
MODEL 27003



FLEXIBLE HANDLE MAGNET
34" Overall Length, Bends and Holds Any Position,
1-1/2 Pounds of Magnetic Power

MODEL 27004



DOUBLE AXIS WELDING CLAMP

MODEL 27020



POSITIONING MAGNET HOLDERS

<u>MODEL</u>	<u>DESCRIPTION</u>
22060	25# MEDIUM MAGNET HOLDER, 3-3/8" X 3-3/8"
27005	50# LARGE MAGNET HOLDER, 4-3/8" X 4-3/8"
27006	75# X-LARGE MAGNET HOLDER, 5-3/8" X 5-3/8"



FLAT SOAPSTONE HOLDER

MODEL 22025



FLAT SOAPSTONE REFILLS

<u>MODEL</u>	<u>DESCRIPTION</u>
22026	FLAT SOAPSTONE REFILL, 6/PK
27023	FLAT SOAPSTONE REFILL, 144/PK



FLAT SOAPSTONE HOLDER WITH THREE FLAT SOAPSTONES

MODEL 27010



ROUND SOAPSTONE HOLDER

MODEL 27011



ROUND SOAPSTONE REFILLS

<u>MODEL</u>	<u>DESCRIPTION</u>
27009	ROUND SOAPSTONE REFILL, 6/PK
27024	ROUND SOAPSTONE REFILL, 144/PK




MARKAL SILVER-STREAK® ROUND MARKER
WITH 6 REFILLS
MODEL 27016



MARKAL SILVER-STREAK® ROUND REFILLS, 6/PK
MODEL 27018



PREMIUM SCRIBE
Tungsten Carbide tip marks on all types of materials - even glass.
MODEL 27008

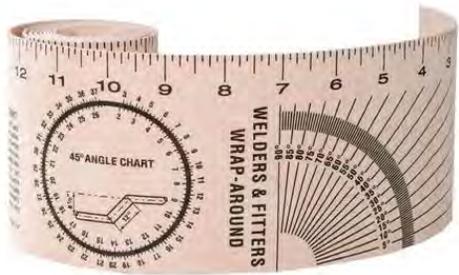

LITTLE HELPER RAPAROUND® PIPE LAYOUT TEMPLATE
Wrap around pipe layout template for pipe up to 12" in diameter.
MODEL 27025

Little Helper Raparound® is a registered trademark of R.E. Lee Company and this guide is manufactured by R.E. Lee Company.



TOTAL CUT® PIPE CUTTING GUIDES
Hinged design for easy use, 16 gauge metal, grooved lines allow you to mark perfect 22.5°, 45°, and 90° angles

<u>MODEL</u>	<u>DESCRIPTION</u>
27026	2-3/8" PIPE CUTTING GUIDE
27027	2-7/8" PIPE CUTTING GUIDE

Total Cut® is a registered trademark of Spring Creek Products and these guides are manufactured by Spring Creek Products.



MARKAL® STICK MARKERS
Made in USA.

<u>MODEL</u>	<u>DESCRIPTION</u>
27012	YELLOW STICK MARKER, 2/PK
27013	WHITE STICK MARKER, 2/PK



HOT MAX PAINT MARKER DISPLAY WITH 72 MARKERS
12 each of our best selling markers—white, yellow, orange, black, silver, and red.

MODEL 27040



HOT MAX PAINT MARKERS
The safest and most versatile paint marker ever! Unsurpassed writing capability on oily, soapy, and wet surfaces including metals, coatings, plastics, glass, ceramics, and other non-porous surfaces. Xylene free, low chlorides, low halogens and does not contain any chemicals listed in California Prop 65. Marking temp range: -50° to 150° F (-46° to 66° C). Made in USA.

<u>MODEL</u>	<u>DESCRIPTION</u>
27015	WHITE PAINT MARKER, PACKAGED, 1/PK
27030	WHITE PAINT MARKER, BULK
27031	BLACK PAINT MARKER, BULK
27032	RED PAINT MARKER, BULK
27014	YELLOW PAINT MARKER, PACKAGED, 1/PK
27033	YELLOW PAINT MARKER, BULK
27034	SILVER PAINT MARKER, BULK
27035	ORANGE PAINT MARKER, BULK





FLAT BASTARD FILES

American standard pattern. High carbon steel construction for durability and long tool life. Coarse flat double cut for quick material removal. For use on steel and iron.

<u>MODEL</u>	<u>DESCRIPTION</u>
27100	8" FLAT BASTARD FILE
27102	12" FLAT BASTARD FILE



HALF-ROUND BASTARD FILE

American standard pattern. High carbon steel construction for durability and long tool life. Coarse half-round double cut for quick material removal. For use on steel and iron.

<u>MODEL</u>	<u>DESCRIPTION</u>
27106	6" HALF-ROUND BASTARD FILE
27107	8" HALF-ROUND BASTARD FILE
27108	10" HALF-ROUND BASTARD FILE



ROUND BASTARD FILE

American standard pattern. High carbon steel construction for durability and long tool life. Coarse round double cut for quick material removal. For use on steel and iron.

<u>MODEL</u>	<u>DESCRIPTION</u>
27109	6" ROUND BASTARD FILE
27110	8" ROUND BASTARD FILE
27111	10" ROUND BASTARD FILE



SLIM TAPER FILES

American standard pattern. High carbon steel construction for durability and long tool life. Coarse single cut for quick material removal. For use on steel and iron.

<u>MODEL</u>	<u>DESCRIPTION</u>
27112	7" SLIM TAPER FILE
27113	6" SLIM TAPER FILE

CHAIN SAW FILES

American standard pattern. High carbon steel construction for durability and long tool life. Fine round single cut for quick material removal or sharpening. For general use on steel and iron or chain saw.



<u>MODEL</u>	<u>DESCRIPTION</u>
27114	6" X 1/8" CHAIN SAW FILE
27115	6" X 5/32" CHAIN SAW FILE
27116	8" X 3/16" CHAIN SAW FILE
27117	8" X 7/32" CHAIN SAW FILE



200 AMP COPPER PLATED BATTERY CHARGER CLAMPS
Standard duty clamps for use with up to #8 gauge cable.

MODEL 27207



PTFE PIPE THREAD TAPE - **NEW!**

White economy grade tape works with many applications, 10,000 PSI rated, -450 to 550° F, 1/2" X 520" x 3 mils

MODEL 27028



SLIC-TITE® PIPE THREAD (GAS) TAPE - **NEW!**

Yellow gas line high density tape works with many applications, 10,000 PSI rated, -450 to 550° F, 1/2" X 260" x 3 mils, LA-Co Brand

MODEL 27029

SLIC-tite® is a registered trademark of LA-CO Industries, Inc. and this tape is manufactured by LA-CO Industries, Inc.



TAP MAGIC CUTTING FLUID

Great all around cutting fluid for use with many different metals including mild steel, stainless steel, and aluminum
Great for cutting, drilling, tapping, or threading metal components
Ozone-friendly formula contains no 1,1,1 tri-chloroethane
Not for sale in California
Made in USA

MODEL 27050
Handy 4 ounce container

MODEL 27051
Larger 16 ounce container is perfect for power users and large projects



ZINC GALVANIZING COATING, 13 OZ SPRAY CAN
Made in USA

MODEL 27000



TRU-FLATE® STYLE MALE PLUGS

Tru-Flate® (T) style plug with male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28000	Tru-Flate® 1/4" x 1/4" Male NPT Plug, Clam
28110	Tru-Flate® 1/4" x 1/4" Male NPT Plug, Bulk
28130	Tru-Flate® 1/4" x 1/4" Male NPT Plug, 10 Pack
28002	Tru-Flate® 1/4" x 3/8" Male NPT Plug
28004	Tru-Flate® 3/8" x 3/8" Male NPT Plug
28006	Tru-Flate® 3/8" x 1/4" Male NPT Plug

TRU-FLATE® STYLE FEMALE PLUGS

Tru-Flate® (T) style plug with female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28001	Tru-Flate® 1/4" x 1/4" Female NPT Plug, Clam
28111	Tru-Flate® 1/4" x 1/4" Female NPT Plug, Bulk
28131	Tru-Flate® 1/4" x 1/4" Female NPT Plug, 10 Pack
28003	Tru-Flate® 1/4" x 3/8" Female NPT Plug
28005	Tru-Flate® 3/8" x 3/8" Female NPT Plug
28007	Tru-Flate 3/8" x 1/4" Female NPT Plug

TRU-FLATE® STYLE MALE COUPLERS

Tru-Flate® (T) style couplers with male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28008	Tru-Flate® 1/4" x 1/4" Male NPT Coupler, Clam
28112	Tru-Flate® 1/4" x 1/4" Male NPT Coupler, Bulk
28132	Tru-Flate® 1/4" x 1/4" Male NPT Coupler, 4 Pack
28011	Tru-Flate® 3/8" x 3/8" Male NPT Coupler



TRU-FLATE® FEMALE COUPLERS

Tru-Flate® (T) style couplers with female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

<u>MODEL</u>	<u>DESCRIPTION</u>
28009	Tru-Flate 1/4" x 1/4" Female NPT Coupler, Clam
28113	Tru-Flate 1/4" x 1/4" Female NPT Coupler, Bulk
28133	Tru-Flate 1/4" x 1/4" Female NPT Coupler, 4 Pack
28010	Tru-Flate 1/4" x 3/8" Female NPT Coupler
28012	Tru-Flate 3/8" x 3/8" Female NPT Coupler
28013	Tru-Flate 3/8" x 1/4" Female NPT Coupler



TRU-FLATE® 1/4" PLUG AND COUPLER SET

Tru-Flate® (T) style plug and coupler set with 1/4" national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28014

INDUSTRIAL/MILTON® STYLE MALE PLUGS

Industrial/Milton® (I/M) style plug with male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28015	Industrial/Milton® 1/4" x 1/4" Male NPT Plug, Clam
28114	Industrial/Milton® 1/4" x 1/4" Male NPT Plug, Bulk
28134	Industrial/Milton® 1/4" x 1/4" Male NPT Plug, 10 Pack
28018	Industrial/Milton® 1/4" x 3/8" Male NPT Plug
28019	Industrial/Milton® 3/8" x 3/8" Male NPT Plug
28021	Industrial/Milton® 3/8" x 1/4" Male NPT Plug

INDUSTRIAL/MILTON® STYLE FEMALE PLUGS

Industrial/Milton® (I/M) style plug with female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28016	Industrial/Milton® 1/4" x 1/4" Female NPT Plug, Clam
28115	Industrial/Milton® 1/4" x 1/4" Female NPT Plug, Bulk
28135	Industrial/Milton® 1/4" x 1/4" Female NPT Plug, 10 Pack
28020	Industrial/Milton® 3/8" x 3/8" Female NPT Plug
28022	Industrial/Milton® 3/8" x 1/4" Female NPT Plug

INDUSTRIAL/MILTON® STYLE MALE COUPLERS

Industrial/Milton® (I/M) style couplers with male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28023	Industrial/Milton® 1/4" x 1/4" Male NPT Coupler, Clam
28116	Industrial/Milton® 1/4" x 1/4" Male NPT Coupler, Bulk
28136	Industrial/Milton® 1/4" x 1/4" Male NPT Coupler, 4 Pack
28028	Industrial/Milton® 3/8" x 3/8" Male NPT Coupler

INDUSTRIAL/MILTON® STYLE FEMALE COUPLERS

Industrial/Milton® (I/M) style couplers with female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.



<u>MODEL</u>	<u>DESCRIPTION</u>
28024	Industrial/Milton® 1/4" x 1/4" Female NPT Coupler, Clam
28117	Industrial/Milton® 1/4" x 1/4" Female NPT Coupler, Bulk
28137	Industrial/Milton® 1/4" x 1/4" Female NPT Coupler, 4 Pack
28027	Industrial/Milton® 1/4" x 3/8" Female NPT Coupler
28029	Industrial/Milton® 3/8" x 3/8" Female NPT Coupler



INDUSTRIAL/MILTON® STYLE 1/4" PLUG & COUPLER SET
Industrial/Milton® (I/M) style plug and coupler set with 1/4" national pipe thread (NPT) connections. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28030



INDUSTRIAL/MILTON® STYLE PUSH COUPLER
Industrial/Milton® (I/M) style 1/4" push coupler with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28026



INDUSTRIAL/MILTON® STYLE BARBED PLUG
Industrial/Milton® (I/M) style 1/4" plug with 1/4" barbed connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28017



INDUSTRIAL/MILTON® STYLE BARBED COUPLER
Industrial/Milton® (I/M) style 1/4" coupler with 1/4" barbed connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28025



LINCOLN® STYLE MALE PLUG

Lincoln® (L) style 1/4" plug with 1/4" male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28031



LINCOLN® STYLE FEMALE PLUG

Lincoln® (L) style 1/4" plug with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28032



LINCOLN® STYLE MALE COUPLER

Lincoln® (L) style 1/4" coupler with 1/4" male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28033



LINCOLN® STYLE FEMALE COUPLER

Lincoln® (L) style 1/4" coupler with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28034



ARO® STYLE MALE PLUG

ARO® (A) style 1/4" plug with 1/4" male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28035

**ARO® STYLE FEMALE PLUG**

ARO® (A) style 1/4" plug with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28036

**ARO® STYLE MALE COUPLER**

ARO® (A) style 1/4" coupler with 1/4" male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28037

**ARO® STYLE FEMALE COUPLER**

ARO® (A) style 1/4" coupler with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28038

**ARO® STYLE PLUG AND COUPLER SET**

ARO® (A) style 1/4" plug and coupler with 1/4" national pipe thread (NPT) connections. Steel construction, 300 PSI max pressure, for compressed air only.

MODEL 28039

**UNIVERSAL MALE COUPLER**

Universal (U) 1/4" coupler with 1/4" male national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only. Works with Tru-Flate®, Industrial/Milton®, and ARO® style plugs. Does not work with Lincoln® style plugs.

MODEL
28040
28118
28138

DESCRIPTION
Universal 1/4" x 1/4" Male NPT Coupler, Clam
Universal 1/4" x 1/4" Male NPT Coupler, Bulk
Universal 1/4" x 1/4" Male NPT Coupler, 4 Pack



UNIVERSAL FEMALE COUPLER

Universal (U) 1/4" coupler with 1/4" female national pipe thread (NPT) connection. Steel construction, 300 PSI max pressure, for compressed air only. Works with Tru-Flate®, Industrial/Milton®, and ARO® style plugs. Does not work with Lincoln® style plugs.

<u>MODEL</u>	<u>DESCRIPTION</u>
28041	Universal 1/4" x 1/4" Female NPT Coupler, Clam
28119	Universal 1/4" x 1/4" Female NPT Coupler, Bulk
28139	Universal 1/4" x 1/4" Female NPT Coupler, 4 Pack



SAFETY BLOW GUNS WITH RUBBER TIP

Vented nozzle meets OSHA Program Directive #100-1 for reduction of air pressure below 30 PSI for cleaning purposes. 1/4" female NPT inlet, 150 PSI max, 10.5 SCFM at 100 PSI. For compressed air only.

<u>MODEL</u>	<u>DESCRIPTION</u>
28108	2' SAFETY BLOW GUN WITH RUBBER TIP
28109	4' SAFETY BLOW GUN WITH RUBBER TIP



BLOW GUN WITH RUBBER TIP

1/4" female NPT inlet. For compressed air only, 150 PSI max.

MODEL 28046



BUTTON TYPE BLOW GUN

Vented nozzle meets OSHA Program Directive #100-1 for reduction of air pressure below 30 PSI for cleaning purposes. 1/4" female NPT inlet. For compressed air only, 150 PSI max.

MODEL 28047



INDUSTRIAL/MILTON® STYLE ADJUSTABLE POCKET BLOW GUN
Industrial/Milton® (I/M) style plug will adjust from very low flow to very high flow. Meets OSHA Program Directive #100-1 for reduction of air pressure below 30 PSI for cleaning purposes.

MODEL 28048



HEAVY DUTY DUAL FOOT AIR CHUCK

Dual foot chuck with built in shut off valve. 1/4" female NPT inlet. Steel construction, 150 PSI max pressure, for compressed air only.

MODEL 28049



DIRECT LINE AIR CHUCK WITH CLIP

Direct line air chuck with built in shut off. 1/4" female NPT inlet. Steel construction, 150 PSI max pressure, for compressed air only.

MODEL 28050



DIRECT LINE AIR CHUCK

Direct line air chuck with built in shut off. 1/4" female NPT inlet. Brass construction, 150 PSI max pressure, for compressed air only. Not for use with inflator gauges.

MODEL 28051



DIRECT LINE AIR CHUCK

Direct line air chuck with built in shut off. 1/4" hose barb connection. Brass construction, 150 PSI max pressure, for compressed air only. Not for use with inflator gauges.

MODEL 28053



AIR CHUCK CLIP

Convert standard direct line air chuck to a clip on chuck. Works with Hot Max model 28051 and 28053 air chucks and most other manufacturers' air chucks. For compressed air only.

MODEL 28052



ANGLED TIRE GAUGES

Precision manufactured tire gauges provide accuracy and performance for the most demanding users. Metal casing with clip. For compressed air only.

<u>MODEL</u>	<u>DESCRIPTION</u>
28054	Angled Tire Gauge, 10 - 50 PSI
28055	Angled Tire Gauge, 20 - 120 PSI



HEAVY DUTY TIRE INFLATOR WITH GAUGES

Precision manufactured tire inflators provide accuracy and performance for the most demanding users. 12" hose with dual foot chuck allows for easy tire filling. 10 - 120 PSI in 2 pound increments on the gauge. 1/4" NPT female inlet. For compressed air only.

MODEL 28056



SCREWDRIVER VALVE CAPS, 4/PK

Screwdriver type valve caps for standard valves. Screwdriver top for removing or inserting valve cores.

MODEL 28058



TIRE VALVE REPAIR TOOL

Repairs core and stem threads, extracts broken cores, removes valve cores.

MODEL 28059



DIAL TIRE GAUGE

10 - 60 PSI in 2 pound increments. Automatic reset and pressure release valve. For compressed air only.

MODEL 28060



MINI FILTER WITH 1/4" NPT CONNECTIONS

5 micron filter with 1/4" female NPT connections. Manual drain with overflow valve. Max working pressure is 150 PSI. Rated flow is 53 SCFM (1500 l/min). For compressed air only.

MODEL 28061



MINI REGULATOR WITH 1/4" NPT CONNECTIONS

Mini regulator with 1/4" female NPT connections. Pressure range is 5 to 125 PSI with locking adjustment knob. Max working pressure is 125 PSI. Rated flow is 16 SCFM (450 l/min). Comes with mounting bracket. For compressed air only.

MODEL 28062



FULL SIZE FILTER WITH 3/8" NPT CONNECTIONS

5 micron filter with 3/8" female NPT connections. Manual drain with overflow valve. Max working pressure is 150 PSI. Rated flow is 73 SCFM (2000 l/min). Comes with mounting bracket. For compressed air only.

MODEL 28063



FULL SIZE REGULATOR WITH 3/8" NPT CONNECTIONS

Full size regulator with 3/8" female NPT connections. Pressure range is 5 to 150 PSI with locking adjustment knob. Max working pressure is 150 PSI. Rated flow is 88 SCFM (2500 l/min). Comes with mounting bracket. For compressed air only.

MODEL 28064



FULL SIZE LUBRICATOR WITH 3/8" NPT CONNECTIONS

Full size lubricator with 3/8" female NPT connections. Max working pressure is 230 PSI. Rated flow is 95 SCFM (2700 l/min). Comes with mounting bracket. For compressed air only.

MODEL 28065



AIR COMPRESSOR TANK DRAIN COCKS

Brass construction for long service life. For compressed air only.

<u>MODEL</u>	<u>DESCRIPTION</u>
28066	Compressor Tank Drain Cock, 1/8" Male NPT
28067	Compressor Tank Drain Cock, 1/4" Male NPT



SAFETY VALVE FOR AIR COMPRESSORS

Brass construction for long service life. 1/4" male NPT connection. 150 PSI set point. Max flow rating is 136 SCFM. For compressed air only.

MODEL 28072



REPLACEMENT AIR PRESSURE GAUGE
2" dial with 1/4" NPT bottom mount. 0 - 160 PSI with 5 PSI incremental markings. For compressed air only.

MODEL 28068



REPLACEMENT AIR PRESSURE GAUGE
1-1/2" dial with 1/8" NPT rear mount. 0 - 160 PSI with 5 PSI incremental markings. For compressed air only.

MODEL 28069



PVC AIR HOSE

Brass male NPT fittings and ferrels. 300 PSI max working pressure, 1,200 PSI burst pressure. Temp range is 25 - 150° F (-4 to 65° C). For compressed air only.

MODEL

DESCRIPTION

28143	1/4" BLUE PVC AIR HOSE, 1/4" MALE NPT, 25'
28144	1/4" BLUE PVC AIR HOSE, 1/4" MALE NPT, 50'
28140	3/8" RED PVC AIR HOSE, 1/4" MALE NPT, 25'
28141	3/8" RED PVC AIR HOSE, 1/4" MALE NPT, 50'
28142	3/8" RED PVC AIR HOSE, 1/4" MALE NPT, 100'



AIR FITTINGS



NYLON RECOIL AIR HOSE

Brass male 1/4" NPT fittings and ferrels with swivels. 200 PSI max working pressure. Temperature range: 20 - 175° F. For compressed air only.

<u>MODEL</u>	<u>DESCRIPTION</u>
28079	1/4" NYLON RECOIL AIR HOSE, 12'
28080	1/4" NYLON RECOIL AIR HOSE, 25'



18" LEADER HOSE

18" rubber leader hose with 1/4" male NPT brass fittings. 200 PSI max working pressure. For compressed air only.


MODEL 28081



DIRECT AIR LINE REPAIR KIT FOR 1/4" HOSE

Kit includes brass direct air line chuck with 1/4" female NPT connection, brass 1/4" barbed hose splicer, brass 1/4" barbed hose to 1/4" male NPT adapter, and three hose clamps. For compressed air only.

MODEL 28082

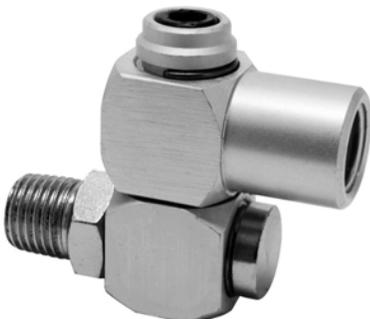

UNIVERSAL 360° SWIVEL WITH 1/4" NPT FITTINGS

Swivel helps air lines from getting tangled and twisted. Brass and steel construction. For compressed air only.

MODEL 28083



INLINE 360° SWIVEL WITH 1/4" NPT FITTINGS
Swivel helps air lines from getting tangled and twisted. Plated steel construction. For compressed air only.

MODEL 28084



90° SWIVEL WITH 1/4" NPT FITTINGS
Swivel helps air lines from getting tangled and twisted. Brass construction. For compressed air only.

MODEL 28085

BARBED HOSE SPLICERS
Solid brass construction.



<u>MODEL</u>	<u>DESCRIPTION</u>
28086	BARBED HOSE SPLICER FOR 1/4" HOSE
28087	BARBED HOSE SPLICER FOR 3/8" HOSE

BARBED HOSE ADAPTER
Solid brass construction.




<u>MODEL</u>	<u>DESCRIPTION</u>
28088	BARBED HOSE ADAPTER, 1/4" NPT X 1/4" BARB
28089	BARBED HOSE ADAPTER, 1/4" NPT X 3/8" BARB

BARBED HOSE ADAPTER
Solid brass construction.



<u>MODEL</u>	<u>DESCRIPTION</u>
28090	BARBED HOSE ADAPTER, 1/4" NPT X 1/4" BARB
28091	BARBED HOSE ADAPTER, 1/4" NPT X 3/8" BARB
28092	BARBED HOSE ADAPTER, 3/8" NPT X 3/8" BARB

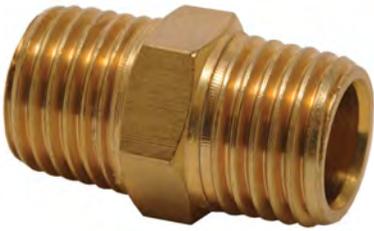

HOSE COUPLING, 1/4" MALE NPT
Solid brass construction.

MODEL 28093



HOSE COUPLING, 1/4" FEMALE NPT
Solid brass construction.

MODEL 28094



REDUCING COUPLING, 1/4" MALE NPT X 3/8" MALE NPT
Solid brass construction.

MODEL 28095



REDUCING COUPLING, 1/4" MALE NPT X 3/8" FEMALE NPT
Solid brass construction.

MODEL 28096



BRASS BUSHINGS
NPT threads. Solid brass construction.

<u>MODEL</u>	<u>DESCRIPTION</u>
28097	BRASS BUSHING, 1/8" FEMALE X 1/4" MALE
28098	BRASS BUSHING, 1/4" FEMALE X 3/8" MALE
28099	BRASS BUSHING, 3/8" FEMALE X 1/2" MALE



BALL END ADAPTER
1/4" male NPT x 1/4" male ball socket (NPT threads).
Solid brass construction.

MODEL 28100



BRASS TEE, 1/4" NPT
Solid brass construction. 150 PSI rated.

MODEL 28101



BRASS TEE, 3/8" NPT
Solid brass construction. 150 PSI rated.

MODEL 28102



BRASS CROSS, 1/4" NPT
Solid brass construction. 150 PSI rated.

MODEL 28103



BRASS CROSS, 3/8" NPT
Solid brass construction. 150 PSI rated.

MODEL 28104



BRASS TRIPOD MANIFOLD
(1) 1/4" female NPT inlet, (3) 1/4" female NPT outlets. Solid brass construction. 150 PSI rated.

MODEL 28105



FLAT BRASS MANIFOLD
(1) 1/4" female NPT inlet, (3) 1/4" female NPT outlets. Solid brass construction. 150 PSI rated.

MODEL 28106



TEST BAR FOR COUPLERS

One each of the Tru-Flate®, Industrial/Milton®, Lincoln®, and ARO® style 1/4" plugs makes it easy to identify which style plug or coupler you need. The stamped style name and color coding also helps with the identification.

MODEL 28042

Tru-Flate® is a registered trademark of Plews & Edlmann. KDAR is not affiliated with Plews & Edlmann and these products are not manufactured by Plews & Edlmann.

Milton® is a registered trademark of Milton Industries. KDAR is not affiliated with Milton Industries and these products are not manufactured by Milton Industries.

ARO® is a registered trademark of Ingersoll-Rand Company. KDAR is not affiliated with Ingersoll-Rand Company and these products are not manufactured by Ingersoll-Rand Company.

Lincoln® is a registered trademark of Lincoln Industrial Group. KDAR is not affiliated with Lincoln Industrial Group and these products are not manufactured by Lincoln Industrial Group.



**HOT MAX BULK AIR FITTING BIN MERCHANDISER
MODEL 28903**

QTY	MODEL	DESCRIPTION
10	28110	TRU-FLATE® 1/4" X 1/4" MALE NPT PLUG
10	28111	TRU-FLATE® 1/4" X 1/4" FEMALE NPT PLUG
10	28112	TRU-FLATE® 1/4" X 1/4" MALE NPT COUPLER
10	28113	TRU-FLATE® 1/4" X 1/4" FEMALE NPT COUPLER
30	28114	INDUSTRIAL/MILTON® 1/4" X 1/4" MALE NPT PLUG
30	28115	INDUSTRIAL/MILTON® 1/4" X 1/4" FEMALE NPT PLUG
20	28116	INDUSTRIAL/MILTON® 1/4" X 1/4" MALE NPT COUPLER
20	28117	INDUSTRIAL/MILTON® 1/4" X 1/4" FEMALE NPT COUPLER
5	28118	UNIVERSAL 1/4" X 1/4" MALE NPT COUPLER
5	28119	UNIVERSAL 1/4" X 1/4" FEMALE NPT COUPLER



QUICK CONNECT PRESSURE WASHER NOZZLE, BLACK
 Black color nozzle produces a 65° spray pattern which is considered a soap nozzle. It produces a very wide spray pattern for applying soap, cleaners, or other chemicals in a wide area. 1/4" quick connector and size 4.0 orifice for use with most pressure washers. 4000 PSI rated.

MODEL 29014



QUICK CONNECT PRESSURE WASHER NOZZLE, WHITE
 White color nozzle produces a 40° spray pattern which is considered a wash nozzle. It produces a wide spray pattern for washing and rinsing. 1/4" quick connector and size 4.5 orifice for use with most pressure washers. 5075 PSI rated.

MODEL 29012



QUICK CONNECT PRESSURE WASHER NOZZLE, GREEN
 Green color nozzle produces a 25° spray pattern which is considered a flushing nozzle. It produces a medium spray pattern for flushing and rinsing with more power than the white washing nozzle. 1/4" quick connector and size 4.5 orifice for use with most pressure washers.

MODEL 29011



QUICK CONNECT PRESSURE WASHER NOZZLE, YELLOW
 Yellow color nozzle produces a 15° spray pattern which is considered a chiseling nozzle. It produces a narrow spray pattern for heavy cleaning and surface preparation. 1/4" quick connector for use with most pressure washers. 5075 PSI rated.

<u>MODEL</u>	<u>DESCRIPTION</u>
29009	QUICK CONNECT NOZZLE, 15° X 4.5 SIZE
29010	QUICK CONNECT NOZZLE, 15° X 5.5 SIZE



QUICK CONNECT PRESSURE WASHER NOZZLE, RED
 Red color nozzle produces a 0° spray pattern which is considered a blasting nozzle. It produces a very narrow (pin point) spray pattern for blasting heavy cleaning areas in a very concentrated area. This nozzle will damage painted surfaces and wood if not used carefully. 1/4" quick connector and size 4.5 orifice for use with most pressure washers. 5075 PSI rated.

MODEL 29013

**QUICK CONNECT PRESSURE WASHER NOZZLE SET**

1 each of our pressure washer nozzles for a total of 5 nozzles. 1/4" quick connector for use with most pressure washers. 5075 PSI rated.

<u>MODEL</u>	<u>DESCRIPTION</u>
29015	QUICK CONNECT NOZZLE SET, SIZE 4.0
29016	QUICK CONNECT NOZZLE SET, SIZE 4.5



PRESSURE WASHER SCREW COUPLERS, M22F X 1/4" FNPT
Female M22 metric threads to 1/4" female NPT. Brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22F is 14 mm.

MODEL 29000



PRESSURE WASHER SCREW COUPLERS, M22F X 1/4" MNPT
Female M22 metric threads to 1/4" male NPT. Brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22F is 14 mm.

MODEL 29001



PRESSURE WASHER SCREW COUPLERS, M22F X 3/8" FNPT
Female M22 metric threads to 3/8" female NPT. Steel construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22F is 14 mm.

MODEL 29002




PRESSURE WASHER SCREW COUPLERS, M22F X 3/8" MNPT
Female M22 metric threads to 3/8" male NPT. Brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22F is 14 mm.

MODEL 29003



PRESSURE WASHER SCREW NIPPLES, M22M X 1/4" FNPT
Male M22 metric threads to 1/4" female NPT. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22M is 14 mm.

MODEL 29004

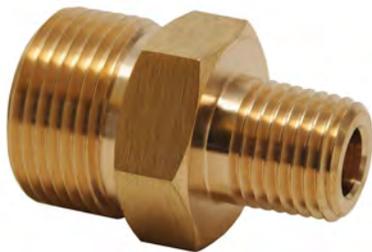

PRESSURE WASHER SCREW NIPPLES, M22M X 1/4" MNPT
Male M22 metric threads to 1/4" male NPT. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22M is 14 mm.

MODEL 29005



PRESSURE WASHER SCREW NIPPLES, M22M X 3/8" FNPT
Male M22 metric threads to 3/8" female NPT. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22M is 14 mm.

MODEL 29006



PRESSURE WASHER SCREW NIPPLES, M22M X 3/8" MNPT
Male M22 metric threads to 3/8" male NPT. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22M is 14 mm.

MODEL 29007



PRESSURE WASHER SCREW NIPPLES, M22M X 1/4" FNPT
LONG
Male M22 metric threads to 1/4" female NPT. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22M is 14 mm.

MODEL 29008

**QUICK COUPLER MALE SOCKET**

Quick coupler to male NPT threads. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29018	1/4" QUICK CONNECT SOCKET, 1/4" MALE NPT
29020	3/8" QUICK CONNECT SOCKET, 3/8" MALE NPT

**QUICK COUPLER FEMALE SOCKET**

Quick coupler to female NPT threads. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29019	1/4" QUICK CONN. SOCKET, 1/4" FEMALE NPT
29021	3/8" QUICK CONN. SOCKET, 3/8" FEMALE NPT

**1/4" QUICK COUPLER X M22F ADAPTER**

1/4" quick coupler to female M22 metric threads. Solid brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers. This M22F is 14 mm.

MODEL 29017

**QUICK COUPLER MALE PLUG**

Quick coupler to male NPT threads. Plated steel construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29022	1/4" QUICK COUPLER PLUG, 1/4" MALE NPT
29024	3/8" QUICK COUPLER PLUG, 3/8" MALE NPT

**QUICK COUPLER FEMALE PLUG**

Quick coupler to female NPT threads. Plated steel construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29023	1/4" QUICK COUPLER PLUG, 1/4" FEMALE NPT
29025	3/8" QUICK COUPLER PLUG, 3/8" FEMALE NPT



SEWER NOZZLE, 1/4" NPT, SIZE 5.0 ORIFICE
Stainless steel construction, 300° F (149° C) max temperature rating, and 5075 PSI pressure rated. For use with most pressure washers.

MODEL 29026



SEWER NOZZLE, 1/8" NPT, SIZE 5.0 ORIFICE
Stainless steel construction, 300° F (149° C) max temperature rating, and 5075 PSI pressure rated. For use with most pressure washers.

MODEL 29027



ROTATING SEWER NOZZLE, 1/4" NPT, SIZE 5.0 ORIFICE
Stainless steel and brass construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

MODEL 29028



ROTATING TURBO NOZZLE
Rotating turbo nozzles are essentially a 0° nozzle that rotates around to clean a larger area than a normal 0° blasting nozzle would. 1/4" female NPT inlet, brass construction, and 212° F (100° C) max temperature rating. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29029	TURBO NOZZLE, SIZE 4.0, 4000 PSI
29030	TURBO NOZZLE, SIZE 4.0, 5100 PSI



TURBO NOZZLE FILTER
1/4" quick connect filter protects your turbo nozzle from sediment or other debris in your water line. Stainless steel and brass construction, 190° F (88° C) max temperature rating, and 5075 PSI pressure rated. For use with most pressure washer turbo nozzles.

MODEL 29031



PRESSURE WASHER REPLACEMENT SPRAY GUN
3/8" female NPT inlet, 1/4" female NPT outlet, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

MODEL 29032



36" PRESSURE WASHER LANCE WITH MOLDED GRIP
Molded grip for comfort, 1/4" male NPT inlet and outlet, plated steel construction, 300° F (149° C) max temperature rating, and 4000 PSI pressure rated. For use with most pressure washers.

MODEL 29033



REPLACEMENT SIDE HANDLE FOR LANCE
For use with any 1/4" pressure washer lance.

MODEL 29035



SOAP STRAINER
Works with 1/4" and 3/8" hoses to prevent debris from entering pressure washer pump. For use with most pressure washers.

MODEL 29036



INLINE WATER STRAINER
Prevents sediment or debris from entering pressure washer pump. Standard hose (GHT) connections for inlet (female) and outlet (male). For use with most pressure washers.

MODEL 29041



HIGH PRESSURE REPLACEMENT HOSE, 3/8" X 50', 4000 PSI
 Heavy rubber jacket will provide years of service. 3/8" male NPT inlet and outlet, 212° F (100° C) max temperature rating, 4000 PSI pressure rated, and heavy bend protectors at each end. For use with most pressure washers.

MODEL 29038



PRESSURE WASHER REPLACEMENT HOSES
 M22 female inlet and outlet couplers, 212° F (100° C) max temperature rating, and 2600 PSI pressure rated. For use with most pressure washers.

<u>MODEL</u>	<u>DESCRIPTION</u>
29039	REPLACEMENT HOSE, 1/4" X 25', 2600 PSI
29040	REPLACEMENT HOSE, 1/4" X 50', 2600 PSI



WE OFFER SEVERAL ASSORTMENTS INCLUDING POWER PANEL SETS FOR OUR PRESSURE WASHER ACCESSORIES.

Model	Page										
22001	63	22042	68	22089	41	23054	15	23107	12	23230	8
22002	63	22044	67	23000	7	23055	15	23108	12	23240	4
22003	63	22045	57	23001	9	23056	15	23109	12	23241	3
22004	63	22046	57	23002	9	23057	15	23110	7	23242	4
22005	63	22047	57	23003	9	23058	15	23111	12	23243	3
22006	63	22048	57	23007	8	23059	15	23112	12	23244	4
22007	63	22049	58	23008	8	23060	15	23113	12	23246	4
22008	64	22050	59	23009	8	23061	16	23114	12	23253	4
22009	64	22051	59	23010	8	23062	16	23115	12	23254	4
22010	64	22053	5	23011	8	23063	17	23120	19	23255	8
22011	64	22054	5	23012	10	23064	17	23121	19	23256	4
22012	64	22055	5	23013	11	23065	16	23123	19	23257	4
22013	64	22057	5	23020	5	23066	16	23124	19	23258	4
22014	72	22058	5	23021	5	23068	17	23142	20	23301	13
22015	72	22059	83	23022	6	23069	17	23143	20	23302	13
22016	72	22060	83	23023	6	23070	14	23145	20	23303	14
22017	72	22061	39	23024	6	23072	15	23146	20	23304	14
22018	72	22062	39	23025	9	23073	17	23150	9	23305	14
22019	71	22063	39	23026	9	23074	17	23151	9	23306	14
22020	70	22064	39	23030	13	23075	14	23152	9	23307	15
22021	70	22065	40	23031	13	23076	17	23153	9	23308	15
22022	9	22066	40	23032	13	23077	17	23154	9	23309	15
22023	10	22067	51	23033	13	23078	14	23160	18	23310	15
22024	53	22068	43	23034	13	23080	10	23161	18	23311	17
22025	84	22070	43	23035	13	23081	10	23162	14	23312	17
22026	84	22071	13	23036	13	23082	10	23163	14	23313	16
22027	7	22072	13	23037	13	23090	5	23164	14	23314	16
22028	18	22073	14	23038	13	23092	5	23165	14	23315	16
22029	8	22074	14	23039	14	23093	5	23201	3	23316	16
22030	8	22075	14	23040	14	23094	6	23202	7	23317	18
22031	52	22076	14	23041	14	23095	6	23203	3	24000	44
22032	52	22077	14	23042	14	23096	6	23220	8	24001	43
22033	52	22078	14	23043	14	23097	6	23221	8	24002	43
22034	53	22079	15	23044	14	23098	6	23222	8	24003	43
22035	67	22080	15	23045	14	23100	11	23223	8	24004	43
22036	67	22081	15	23046	15	23101	11	23224	8	24005	43
22037	67	22082	11	23047	15	23102	11	23225	8	24006	43
22038	67	22083	11	23048	15	23103	11	23226	8	24008	44
22039	68	22084	11	23049	15	23104	11	23227	8	24010	48
22040	67	22087	54	23050	15	23105	11	23228	8	24011	48
22041	68	22088	42	23053	15	23106	12	23229	8	24012	51

INDEX



Model	Page										
24013	51	24079	41	24157	45	24216	29	25091	55	26061	70
24020	39	24085	42	24159	45	24217	28	25092	55	26062	70
24021	39	24086	42	24161	46	24218	28	25093	56	26063	70
24022	39	24088	42	24162	46	24220	48	25097	56	26064	70
24023	39	24089	42	24163	46	24221	48	26000	62	26065	70
24024	39	24091	42	24164	46	24222	49	26001	62	26070	70
24025	39	24092	42	24171	46	24223	49	26002	62	26071	70
24026	39	24100	49	24172	52	24224	49	26003	62	26072	71
24027	39	24101	49	24173	52	24225	49	26005	62	26073	71
24028	39	24102	49	24174	53	25001	60	26006	62	26074	71
24029	39	24103	49	24175	53	25002	60	26007	62	26080	71
24030	39	24104	49	24176	53	25003	60	26009	62	26081	71
24031	39	24110	51	24177	46	25012	58	26015	63	26082	71
24032	39	24111	51	24178	46	25020	60	26016	63	26083	71
24033	39	24112	51	24180	43	25022	60	26017	63	26084	71
24034	39	24113	51	24181	43	25025	54	26018	63	26085	71
24035	39	24114	51	24182	43	25026	54	26019	63	26086	72
24040	40	24115	51	24183	43	25027	54	26020	63	26087	72
24041	40	24122	47	24184	44	25028	56	26021	63	26088	72
24042	40	24123	47	24185	44	25030	58	26022	63	26090	72
24043	40	24124	47	24186	44	25031	58	26023	63	26091	72
24044	40	24125	47	24187	18	25040	57	26025	65	26092	72
24050	40	24126	47	24188	18	25041	57	26030	63	26093	75
24051	40	24127	47	24189	18	25042	57	26031	6	26094	75
24052	40	24128	47	24190	18	25043	57	26032	64	26095	75
24053	40	24129	47	24191	18	25044	57	26033	64	26096	75
24054	40	24130	47	24192	18	25045	57	26034	64	26097	75
24055	40	24131	48	24200	28	25050	57	26035	64	26098	75
24056	40	24140	50	24201	28	25051	57	26040	79	26099	75
24057	40	24141	50	24202	30	25052	57	26041	79	26100	75
24058	41	24142	50	24203	29	25053	57	26042	79	26101	75
24059	41	24143	50	24204	30	25054	57	26043	79	26102	75
24060	41	24144	50	24205	32	25055	57	26044	79	26103	75
24061	41	24145	50	24206	26	25064	59	26045	79	26104	75
24070	41	24146	50	24208	30	25084	55	26050	68	26110	76
24071	41	24147	50	24209	29	25085	55	26051	68	26111	76
24072	41	24150	45	24210	31	25086	55	26052	67	26112	76
24074	41	24153	45	24211	31	25087	55	26053	11	26113	76
24076	41	24154	45	24212	28	25088	55	26054	69	26114	76
24077	41	24155	45	24214	32	25089	55	26055	69	26115	76
24078	41	24156	45	24215	30	25090	55	26060	70	26116	76

Model	Page										
26117	76	26179	80	26245	63	26321	76	27031	86	28004	90
26118	76	26180	80	26246	63	26330	73	27032	86	28005	90
26120	76	26181	80	26247	63	26331	73	27033	86	28006	90
26121	76	26182	79	26248	65	26332	73	27034	86	28007	90
26122	76	26190	61	26249	63	26333	73	27035	86	28008	90
26123	76	26191	61	26250	65	26334	73	27040	86	28009	91
26124	76	26192	61	26252	75	26335	73	27050	89	28010	91
26125	76	26193	61	26253	71	26336	73	27051	89	28011	90
26126	76	26194	61	26271	65	26337	73	27060	82	28012	91
26130	76	26195	61	26272	65	26338	73	27061	82	28013	91
26131	76	26196	61	26274	65	26339	73	27062	82	28014	91
26132	76	26200	68	26276	75	26341	73	27063	82	28015	91
26133	76	26201	69	26277	75	26342	73	27064	82	28016	92
26134	76	26202	69	26278	75	26344	73	27065	82	28017	93
26135	76	26203	69	26279	63	26345	73	27066	82	28018	91
26136	76	26204	69	26280	63	26901	74	27067	82	28019	91
26140	76	26205	69	26281	65	27000	89	27070	81	28020	92
26141	76	26206	69	26282	65	27002	83	27071	81	28021	91
26142	76	26207	68	26284	65	27003	83	27072	81	28022	92
26143	76	26208	68	26285	65	27004	83	27073	81	28023	92
26144	76	26209	67	26287	70	27005	83	27074	81	28024	92
26145	76	26210	67	26288	70	27006	83	27075	81	28025	93
26146	76	26211	67	26289	72	27008	85	27100	87	28026	93
26150	77	26213	67	26290	66	27009	84	27102	87	28027	92
26151	77	26218	70	26291	66	27010	84	27106	87	28028	92
26153	77	26219	72	26292	66	27011	84	27107	87	28029	92
26154	77	26220	71	26296	63	27012	86	27108	87	28030	93
26155	77	26221	71	26297	75	27013	86	27109	87	28031	94
26156	77	26222	72	26298	75	27014	86	27110	87	28032	94
26157	77	26223	71	26299	75	27015	86	27111	87	28033	94
26158	77	26224	71	26310	76	27016	85	27112	87	28034	94
26159	78	26226	71	26311	76	27018	85	27113	87	28035	94
26160	78	26231	64	26312	76	27020	83	27114	88	28036	95
26165	78	26232	66	26313	76	27023	84	27115	88	28037	95
26166	78	26233	65	26314	76	27024	84	27116	88	28038	95
26167	78	26234	65	26315	76	27025	85	27117	88	28039	95
26168	78	26240	66	26316	76	27026	85	27207	88	28040	95
26169	78	26241	66	26317	76	27027	85	28000	90	28041	96
26175	80	26242	66	26318	76	27028	88	28001	90	28042	106
26176	80	26243	63	26319	76	27029	88	28002	90	28046	96
26178	80	26244	63	26320	76	27030	86	28003	90	28047	96

INDEX



Model	Page	Model	Page	Model	Page	Model	Page
28048	97	28098	104	29004	110	50G	24
28049	97	28099	104	29005	110	50100	23
28050	97	28100	105	29006	110	50200	25
28051	97	28101	105	29007	110	GTORCH	26
28052	98	28102	105	29008	110	HH-1	38
28053	97	28103	105	29009	108	MM-1	33
28054	98	28104	106	29010	108	VH-1	36
28055	98	28105	106	29011	108	VHD-1	37
28056	98	28106	106	29012	108	VTK-HD-A	35
28058	98	28108	96	29013	108	VTK-MD	34
28059	98	28109	96	29014	108		
28060	99	28110	90	29015	109		
28061	99	28111	90	29016	109		
28062	99	28112	90	29017	111		
28063	99	28113	91	29018	111		
28064	100	28114	91	29019	111		
28065	100	28115	92	29020	111		
28066	100	28116	92	29021	111		
28067	100	28117	92	29022	111		
28068	101	28118	95	29023	111		
28069	101	28119	96	29024	111		
28072	100	28130	90	29025	111		
28079	102	28131	90	29026	112		
28080	102	28132	90	29027	112		
28081	102	28133	91	29028	112		
28082	102	28134	91	29029	112		
28083	102	28135	92	29030	112		
28084	103	28136	92	29031	112		
28085	103	28137	92	29032	113		
28086	103	28138	95	29033	113		
28087	103	28139	96	29035	113		
28088	103	28140	101	29036	113		
28089	103	28141	101	29038	114		
28090	103	28142	101	29039	114		
28091	103	28143	101	29040	114		
28092	103	28144	101	29041	113		
28093	104	28903	107	100G	22		
28094	104	29000	109	100MC	27		
28095	104	29001	109	125WFG	1		
28096	104	29002	109	135WFG	2		
28097	104	29003	109	500G	21		

Yellow highlight means new product!

KDAR Company, and its affiliates, warrants that all products covered under this warranty are free from defects in material and workmanship for up to two years from the date of purchase (warranty time period varies with products). This warranty is extended to the original purchaser who uses the product in a consumer application (personal, residential, or household usage). All products covered under this limited warranty which are used in commercial applications (i.e. income producing or service related) are warranted to be free from defects in material and workmanship for 90 days from the date of original purchase.

KDAR Company, and its affiliates, will repair or replace, at KDAR's sole discretion, parts found to be defective in material or workmanship within the warranty period. Warranty service will be scheduled according to the normal work flow and business hours of the service center doing the work as well as the availability of replacement parts. All decisions from KDAR Company regarding this limited warranty shall be final.

Original Purchaser's Responsibility:

1. Retain the original cash register receipt as proof of purchase.
2. Follow manual instructions regarding the care and operation of your equipment.
3. If warranty work is required, **DO NOT RETURN PRODUCTS TO THE RETAILER.** Contact KDAR Company for instructions. Visit www.hotmaxtorches.com or call KDAR Company M-F 8AM-5PM CST to locate the nearest Authorized Service Center.

Not Covered:

1. Transportation charges for sending or delivering the product to the Authorized Service Center or returning the repaired or replacement product back to the customer. These charges are the responsibility of the customer.
2. Damages caused by ordinary wear, abuse, rain, freeze damage, negligence, accident, or failure to operate or maintain the products in accordance with the instructions in the operator's manual or instructions supplied with the products.
3. Damage caused by unauthorized repair or alterations.

Exclusions and Limitations:

KDAR Company makes no other warranty of any kind, express or implied. Implied warranties, including warranties of merchantability and of fitness for a particular purpose, are hereby disclaimed. The warranty service described above is the exclusive remedy under this warranty; liability for incidental and consequential damages is excluded to the extent permitted by law.

This warranty gives you specific legal rights and you may have other rights which vary from state to state. Some states do not allow a disclaimer of implied warranties, or the exclusion of incidental and consequential damages, so the above disclaimers and exclusions may not apply to you.

For warranty service or to obtain service parts or accessories:

Call : (636) 493-9920 M-F 8 to 4:30 PM, CST

Visit: www.kdarco.com

Write: KDAR Company
3671 New Town Blvd
St. Charles, MO 63301

Distributed by:



www.kdarco.com