


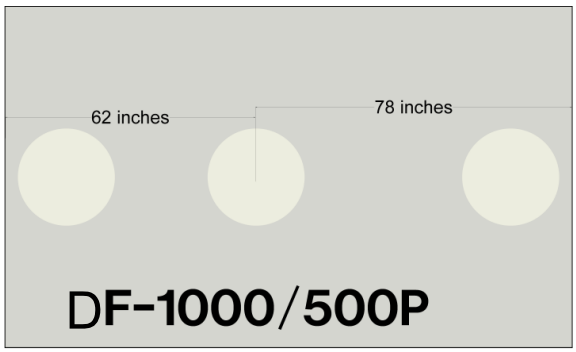


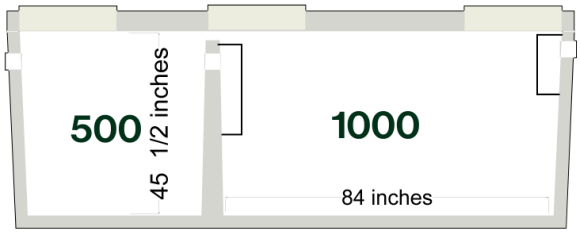

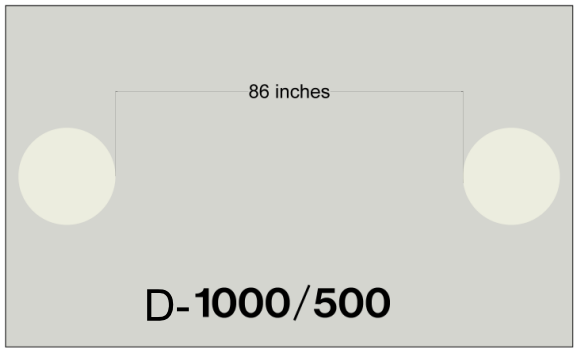

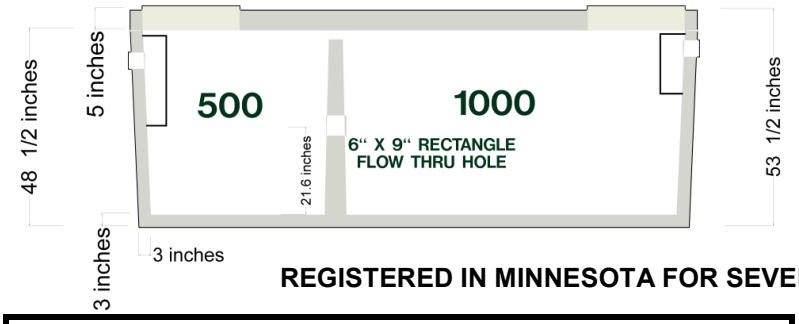

TANK SPECIFICATIONS

CAPACITY:
1500 GALLONS = 1000 & 500
DIMENSIONS:
LENGTH = 140" AT TOP
136" AT BOTTOM
WIDTH = 84" AT TOP
80" AT BOTTOM
OVERALL HEIGHT = 58"
DEPTH BELOW INLET = 42"
DEPTH BELOW OUTLET = 39"
INLET AND OUTLET BAFFLES:
POLYETHENE W/STAINLESS STEEL CONNECTORS
INLET BAFFLE:
14.5" (8"ABOVE LIQUID LEVEL, 6.5" BELOW LIQUID LEVEL) 18%
OUTLET BAFFLE:
22" (7.5" ABOVE LIQUID LEVEL, 14.5" BELOW LIQUID LEVEL) 40%
LIQUID CAPACITY:
1000 LIFT = 27.78 GAL PER INCH
500 LIFT = 13.89 GAL PER INCH
36" LIQUID DEPTH
ALL ACCESS OPENINGS ARE 24" I.D.
ALL BAFFLES HAVE A MINIMUM 1" AIR SPACE BETWEEN COVER AND TOP OF BAFFLE

REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.

MODEL: DF-1000/500
DARWIN F-1000/500P
MODEL: D-1000/500
DARWIN 1000/500
SEPTIC TANK/HOLDING TANK
1896 GALLONS
TANK WEIGHT 12969 LBS

*P*recast
*S*ystems
*I*nc.

PO Box 56, Darwin MN 55324
320-693-8440 www.darwinconcrete.com