


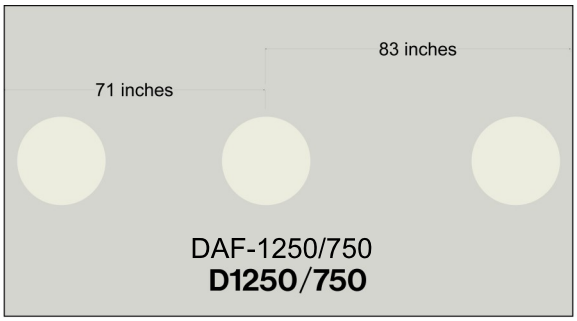


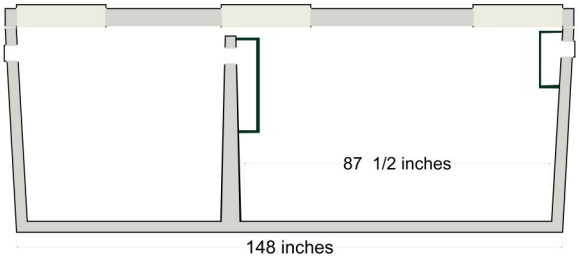

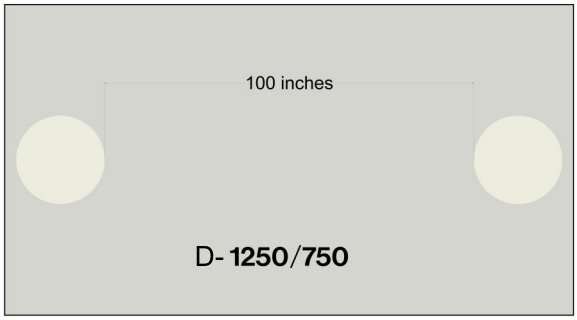

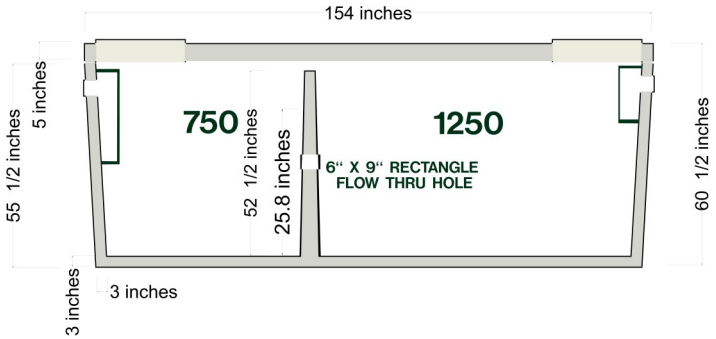

TANK SPECIFICATIONS

CAPACITY:

2000 GALLONS = 1250 & 750

DIMENSIONS:

LENGTH = 154" AT TOP,
148" AT BOTTOOM
WIDTH = 84" AT TOP,
78" AT BOTTOM
OVERALL HEIGHT = 62"
DEPTH BELOW INLET = 48"
DEPTH BELOW OUTLET = 46"

INLET AND OUTLET BAFFLES:

POLYETHELENE w/STAINLESS STEEL CONNECTORS

INLET BAFFLE:

15" (8" ABOVE LIQUID LEVEL,
7" BELOW LIQUID LEVEL) 16.25%

OUTLET BAFFLE:

25 1/4" (8" ABOVE LIQUID LEVEL,
17 1/4" BELOW LIQUID LEVEL) 40%

LIQUID CAPACITY:

1250 LIFT = 29.76 GAL PER INCH
750 LIFT = 17.86 GAL PER INCH
43" LIQUID DEPTH

ALL ACCESS OPENINGS ARE
24" I.D.
ALL BAFFLES HAVE A MINIMUM 1"
AIR SPACE BETWEEN COVER AND
TOP OF BAFFLE

REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.

MODEL: DAF - 1250/750
D 1250/750
SEPTIC TANK/HOLDING TANK
2417 GALLONS
TANK WEIGHT 14,710 LBS

Precast Systems Inc.

PO Box 56, Darwin MN 55324
320-693-8440 www.darwinconcrete.com