

POINT OF USE PANELS

Single Source Panels

Series 233

FEATURES

- High purity brass or stainless steel line regulators.
- One inlet with individual outlets for each regulator.
- Horizontal or vertical configuration.
- HDPE panel.
- Inlet and outlet connections 1/4" stainless steel compression fittings.

HOW TO ORDER

233M-X-PPP-C

M = 1 for brass

4 for stainless steel

X = H for horizontal configuration

V for vertical configuration

Y = number of regulators

C = center inlet

PPP = delivery pressure of each regulator on the panel.

Show the range code for each regulator in order from top to bottom or left to right.

25 for 0-25 psig

50 for 0-50 psig

100 for 0-100 psig


150 for 0-150 psig

Example:

2331-H-25-25-50-100-C describes a center inlet brass four-regulator panel in the horizontal orientation, with the first regulator on the left having a 0-25 psig delivery pressure range followed in order by three others: 0-25 psig, 0-50 psig, and 0-100 psig.



three-regulator panel – inlet may be from the left or the right

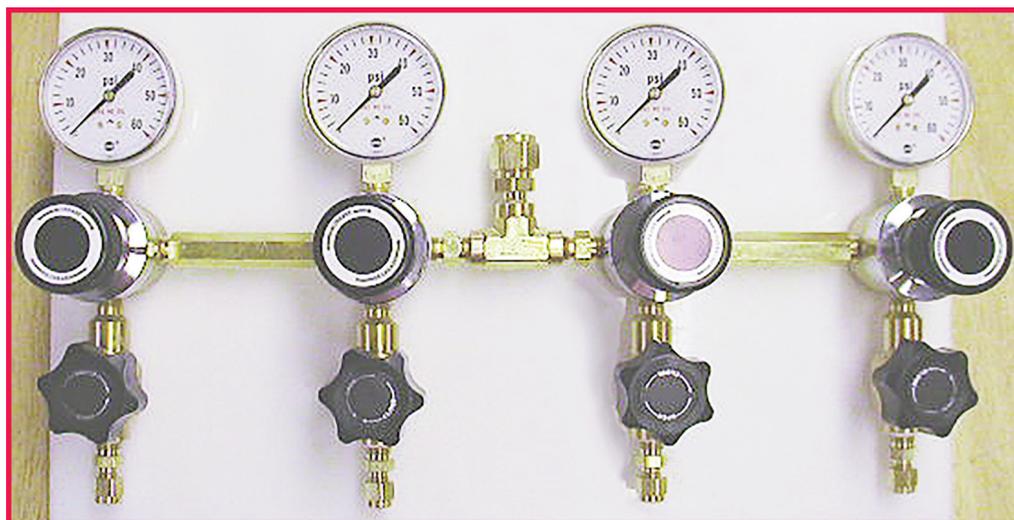

four-regulator panel with center inlet