



Pump type

STM-6-LN-3S_2250

M
K




Des. A.A.

Offer data

Client:	Offer n°:
Item:	Date: 05/04/2022

Duty point

Capacity:	Differential head:	Absorbed power:	
	Speed: 2250 RPM	Magnetic losses:	Selected impeller: Standard
Fluid: *	Specific gravity: 1.00 kg/dm³	Suction nozzle: 1.5" top or 2" end	ANSI 300
Temperature: 20.0 °C	Viscosity: 1.00 mm²/s	Discharge nozzle: 1" ANSI 300	

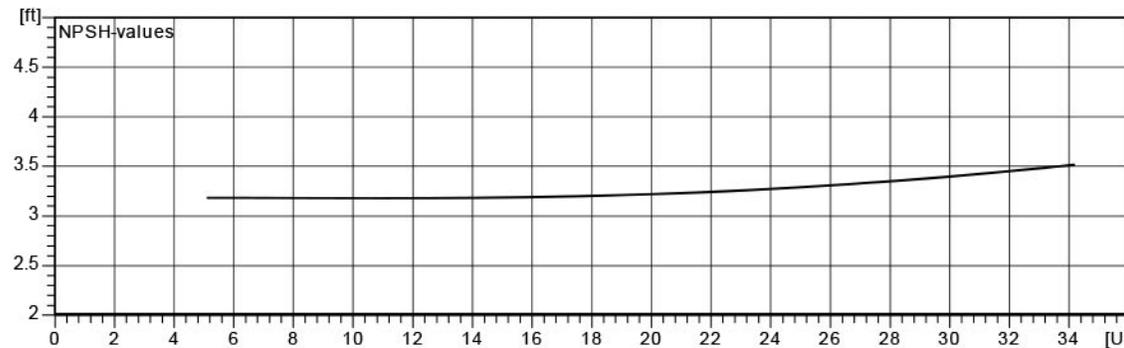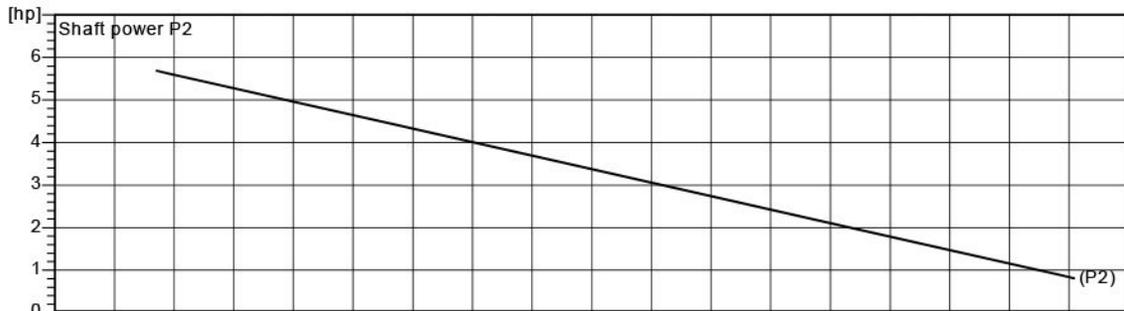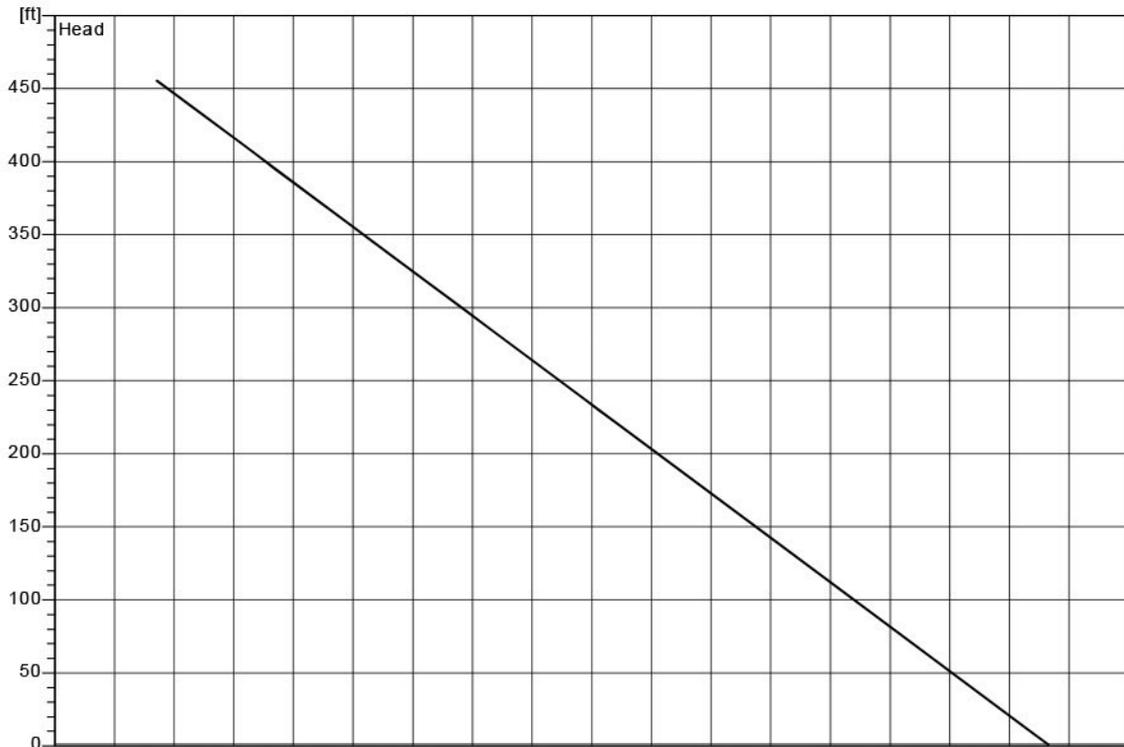

Tolerances : ISO 9906 Gr.2B (NPSH + 0.5 m)