

KSL-W


Wraps

Description

Flexible intumescent fire protection wrap.

Application Areas

- Internal fire protection wrap for use on combustible pipes in KSL mixed penetration seals with and without insulation in plasterboard walls, solid walls and solid floors. Suitable for a wide range of non-standard pipes

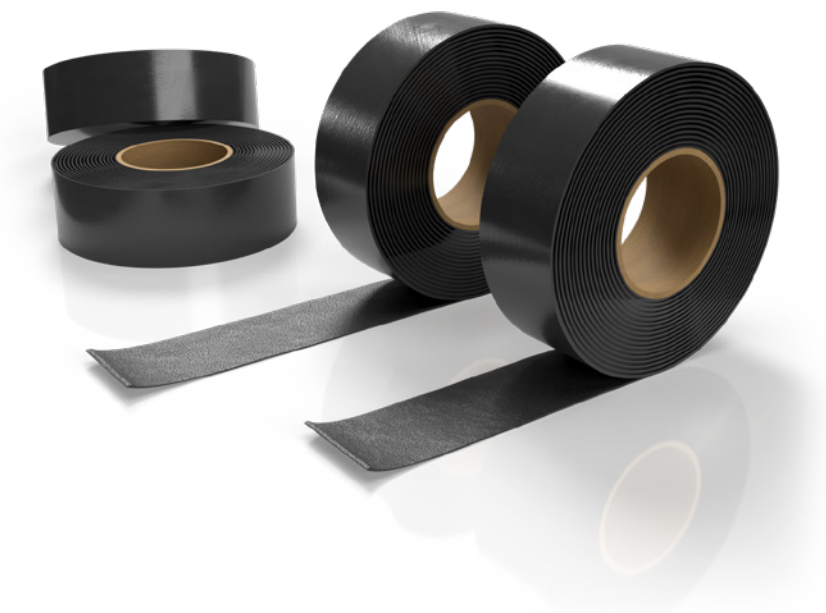

Delivery and Packaging

KSL-W (self-adhesive)			
Packing	Box		
Length	10 m	20 m	10 m
Width	50 mm		100 mm
Thickness	1.5 mm		
Quantity	1		
Item number			
	15510	15520	15530

KSL-W

Technical Data

Classification	E acc. to DIN EN 13501-1
Durability and usability	Use category, type X
Composition	Halogen-free, expanding building material based on expandable graphite
Colour	Grey
Bulk density	1300 kg/m ³
Start of reaction	From approx 175 °C
Expansion pressure	1.2 N/mm ²
Expansion factor	up to 22 times (550 °C; 30 min; with superimposed load)
Direction of action	Three-dimensional
Field of application	Pipe penetration seals

Lagerung	Cool and dry
Safety information	Please note the safety data sheet.
Declaration of performance (DOP) no.	155-KSL-W