



SUPERWOOD INDUSTRIES SDN BHD

PRODUCT CATALOGUE



WWW.SUPERWOOD.COM



TABLE *of* CONTENTS

ABOUT US	01 - 04
PROJECT PEFERENCES	05 - 11
OUR PRODUCTS	
• Solid Decorative Timber Door	12 - 15
• Solid Decorative Timber with Glass Door	16 - 18
• Solid Decorative with Louvers Door	19 - 20
• Modern Exclusive Door	21 - 25
• Timber Decking	26
• Metal Frame	
- Size of Metal Frame	27
- Safety & Handling	28
- Location of Accessories	29
- Metal Frame	30
• Wooden Frame	31 - 33
INTERIOR HOME FURNITURE (DESIGN & BUILD)	34 - 41
FANCY PLYWOOD	42 - 44
DOOR SKIN - LAMINATE	45 - 49
DOOR SKIN - VENEER	50 - 51
DOOR SKIN - MELANINE & WHITE PRIMER	52
METHODS STATEMENTS FOR PROTECTING AND STORING DOOR LEAF AND DOOR FRAME	53 - 58
FIRE RATED DOOR	
• Application of Fire Rated Door	59
• Approved Fire Resistant Doorset System	60
• Structure & Hardware	61 - 63
• PLATICO Fire Rated Door with Certificates	64 - 79
• GAYADOR Fire Rated Door with Certificates	80 - 95

ABOUT *Us*

COMPANY BACKGROUND

Located at Kampung Narawang, Ranau, SUPERWOOD INDUSTRIES SDN BHD is a leading force in downstream wood processing. Our state-of-the-art machinery, imported from Europe, includes moulders, gang rip saws, finger joint machines, sanding machines, bandsaws, and grinders, making our tool room exceptionally well-equipped.

We are proud to be a global exporter of timber entry doors and profiled mouldings, offering both lacquered and white primed finishes. Our products are distributed worldwide, meeting the diverse needs of our international clientele. In response to rising electricity costs, we have innovated to produce pre-finished exterior pre-hung doors complete with hardware and insulated glass, providing excellent insulation and added value for homes.

Our commitment to quality is unwavering, evidenced by our certified laboratory and Research and Development centre, which conduct rigorous performance tests on our doors. This ensures that every product meets the highest standards before reaching the market.

SUPERWOOD INDUSTRIES SDN BHD specializes in producing a variety of timber species, including White Seraya (Meranti), Red Seraya (Meranti), Keruing, Kapur, Selangan Batu (Yellow Balau), Bintangor, and other commercial species. We are dedicated to ecological and sustainable practices, using timber sourced responsibly to ensure the sustainability of forests for future generations.



ABOUT *Us*



FACTORY

Kampung Narawang, Peti Surat 139, 89308 Ranau, Sabah



SALES OFFICE

Lot 1, Lorong Bizhub 1, Bandar Sierra Bizhub, 88450
Kota Kinabalu, Sabah.

ABOUT Us

SUSTAINABILITY

Superwood Industries Sdn Bhd is a worldwide exporter of premium timber entry doors, renowned for their profiled moulding with lacquered and white primed finishes. Superwood work with a variety of timber species, including:

- White Seraya (Meranti)
- Red Seraya (Meranti)
- Keruing, Kapur
- Selangan Batu (Yellow Balau)
- Bintangor

Committed to sustainability, Superwood only use timber from ecological sources, ensuring future generations can continue to benefit from our natural resources.



CUSTOMER SATISFACTION

As a family-owned company, Superwood is dedicated to being absolutely customer-oriented. They value long-term, meaningful relationships with their customers, always prioritizing their interests as a core part of their corporate culture. Superwood management team and employees are highly experienced in their areas, ensuring that they consistently deliver quality and satisfaction. Superwood approach their work with a spirit of service, reflecting their commitment to customer care in every aspect of their activities.

ABOUT *Us*

QUALITY

In today's global economy, companies of all sizes are establishing operations in foreign markets, recognizing the greater opportunities for market growth and diversification that international expansion provides.

Superwood Industries Sdn Bhd has embraced this trend, expanding their business internationally. Superwood Industries Sdn Bhd is proud to be involved in exporting their high-quality doors to various countries, including Poland, France, the United Kingdom, and many more. This international presence not only allows them to reach new customers but also enhances their ability to innovate and adapt to diverse market demands, ensuring continued growth and success.

TESTED & TRUSTED

Superwood Industries Sdn Bhd had invested in extensive research and development to ensure the highest quality of their doors. Certified Research and Development Centre conducts rigorous performance tests, so each of Superwood product undergoes thorough evaluation before market release. Superwood specialize in pre-finished, pre-hung exterior doors with hardware and insulated glass, delivering outstanding insulation and durability for your home.



PROJECT PREFERENCES

OUR MOST NOTABLE CLIENTS



superwood.com.my

PROJECT PREFERENCES



Residential

Likas Boulevard, Kota Kinabalu
PRIMA Borneo Cove, Sandakan
V24 Residences KKIP, Sepanggar
Coral Bay Sutera Harbour, Kota Kinabalu
Jesselton Twin Tower, Kota Kinabalu
Jesselton Residence, Kota Kinabalu

Jesselton Condominium, Kota Kinabalu
Puri Fantasi Condominium, Kota Kinabalu
Alila Dalit Bay, Tuaran
Kuarters Pasukan Gerakan Am, Kinarut
Kuarters Hospital Ranau
Kuarters SMK Badin Tuaran




Healthcare

Klinik Kesihatan Lawas, Sarawak
KPJ Specialist Healthcare, Sabah
Hospital Tawau, Sabah



superwood.com.my

PROJECT PREFERENCES

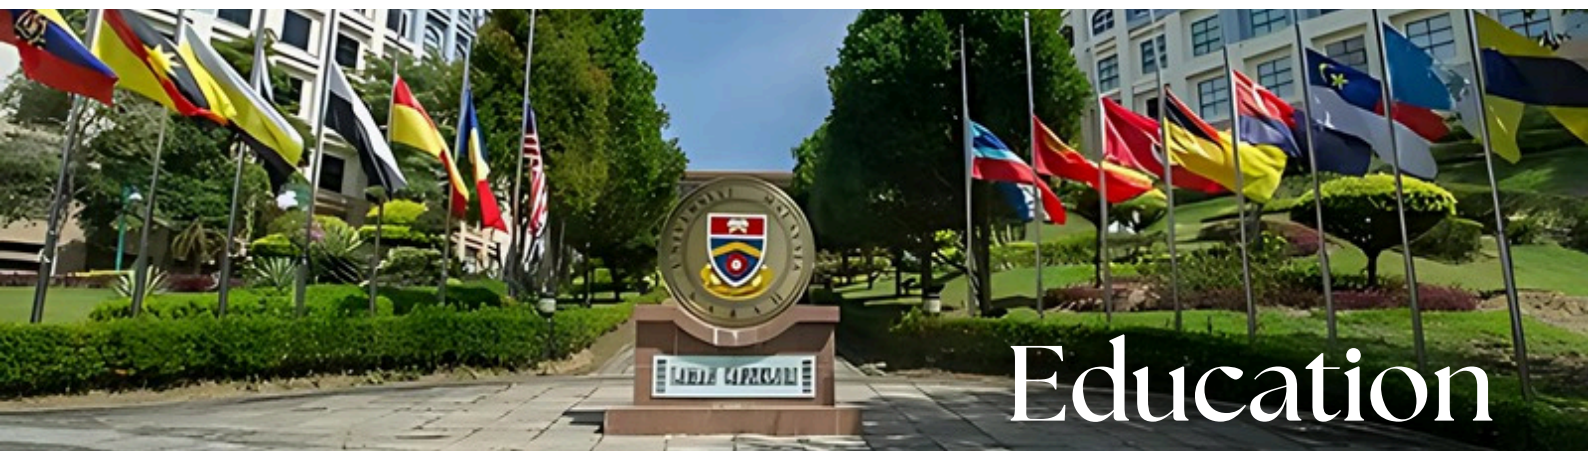

Education

Kian Kok Middle School, Kota Kinabalu
Universiti Malaysia Sabah (UMS)
SMK Kota Marudu II, Sabah

Goshen Adventist Secondary School, Kota Marudu
Universiti Malaysia Sabah, Kampus Antarabangsa Labuan



Commercial

Sheraton Hotel, Kota Kinabalu
Marriot Hotel, Kota Kinabalu
Holiday Inn, Kota Kinabalu
Le Meridien Hotel, Kota Kinabalu
The Klagan Regency 1 Borneo Hypermall, Sabah
My Dream Hotel, Beaufort
Boutique Hotel, Tawau
Shangrila Rasa Ria Resort, Sabah
The Luma Hotel Sutera Avenue

Balai Bomba Putatan, Sabah
Penjara Pusat Kota Kinabalu
Penjara Pusat Sandakan
Penjara Pusat Tawau
Penjara Lahad Datu
Balai Polis Inanam Phase 2, Sabah
Jabatan Kerja Raya, Sabah
Aeropod, Kota Kinabalu



superwood.com.my

PROJECT PREFERENCES



Commercial

Menara Hap Seng, Kota Kinabalu
 Kampus INTAN, Sabah
 SESB PPU Building, Sabah
 SESB Kota Marudu, Sabah
 Indah Sabah Building, Sabah
 Petronas Cari Gali Sdn Bhd, Sabah
 Petronas Chemicals Fertiliser Sdn Bhd, Sabah
 Wisma Good Sheperd Parish Hall, Sandakan

Wisma Harta Sdn Bhd (Wisma Muis), Sabah
 Skim Pembentungan Tenom Fasa 1, Sabah
 Weemaju Sabah Sdn Bhd, Sabah
 Behn Meyer Agricare (M) Sdn Bhd, Sabah
 Kina Roof Sdn Bhd, Sabah
 Public Bank Berhad, Penampang
 ITCC Shopping Mall, Penampang
 Pizza Hut Delivery, Penampang




superwood.com.my

PROJECT PREFERENCES

Superwood Industries Sdn Bhd is distinguished by its design, quality, and by manufacturing upscale wooden doors. Our pioneering enables us to arrange to perfection, wood species, curves, and moulding, giving a prestigious and unique style with solid wood creations of exceptional quality.

In the residential or commercial project, we meet the needs of our customers, while respecting the quality of our products which makes our reputation. Whether it's an interior wood door, an exterior wood door or any wooden door by Superwood Industries Sdn Bhd is undoubtedly a sign of longevity and beauty.

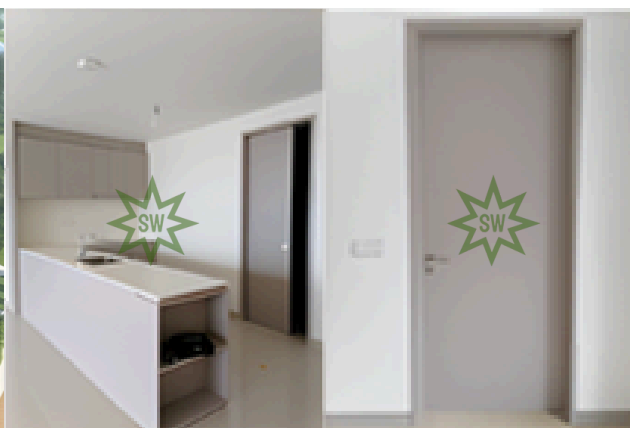

coral bay
SUTERA HARBOUR BOULEVARD

PRODUCT SUPPLIED :

Flush Pocket Sliding Door
Fire Rated Door
Normal Flush Door

PLATICO

GayaDor



PRODUCT SUPPLIED :

Fire Rated Door
Normal Flush Door

GayaDor

Alila

PROJECT PREFERENCES



PRODUCT SUPPLIED :

Fire Rated Door
Normal Flush Door

PLATICO

GayaDor



PRODUCT SUPPLIED :

Fire Rated Door
Normal Flush Door

GayaDor

J
JESSELTON
TWIN TOWERS
天璽168

PROJECT PREFERENCES



PRODUCT SUPPLIED :

Fire Rated Door



PETRONAS

PRODUCT SUPPLIED :


Fire Rated Door
Normal Flush Door



OUR PRODUCT



SOLID DECORATIVE ○○○ TIMBER DOOR

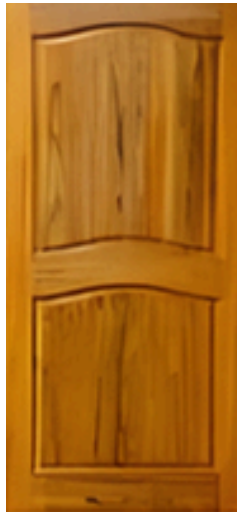

+60 88 495 000




superwoodsales@gmail.com



superwood.com.my

SOLID DECORATIVE ○○○ TIMBER DOOR

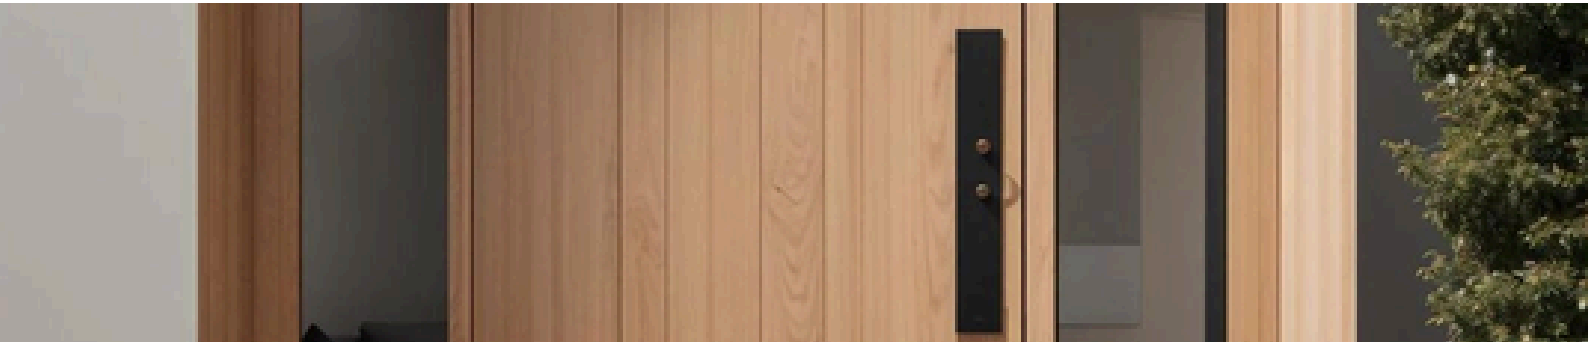

+60 88 495 000



superwoodsales@gmail.com




superwood.com.my

SOLID DECORATIVE ○○○ TIMBER DOOR



SOLID DECORATIVE ○○○ TIMBER DOOR

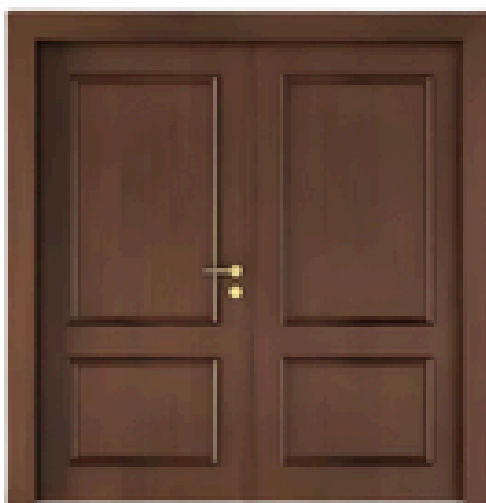

+60 88 495 000




superwoodsales@gmail.com



superwood.com.my



SOLID DECORATIVE TIMBER WITH GLASS DOOR

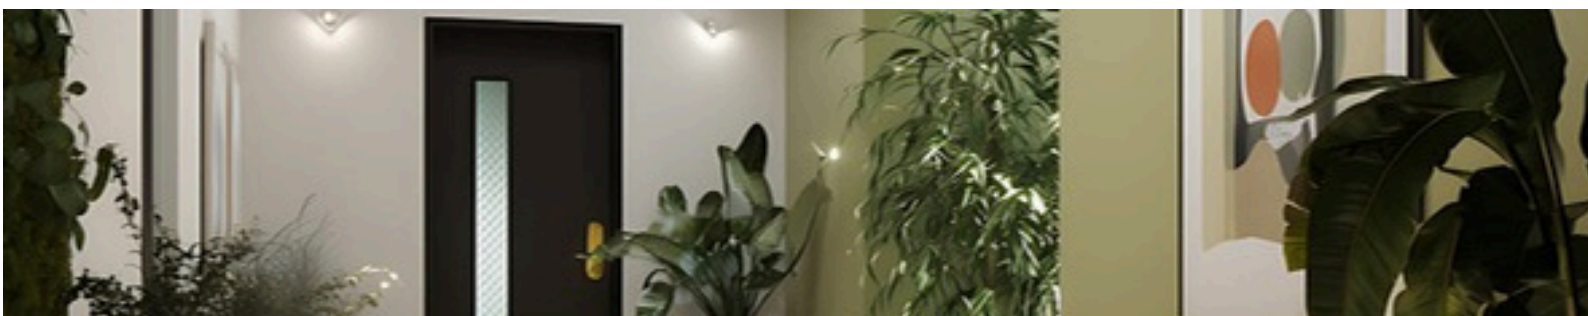

+60 88 495 000




superwoodsales@gmail.com



superwood.com.my



SOLID DECORATIVE TIMBER WITH GLASS DOOR

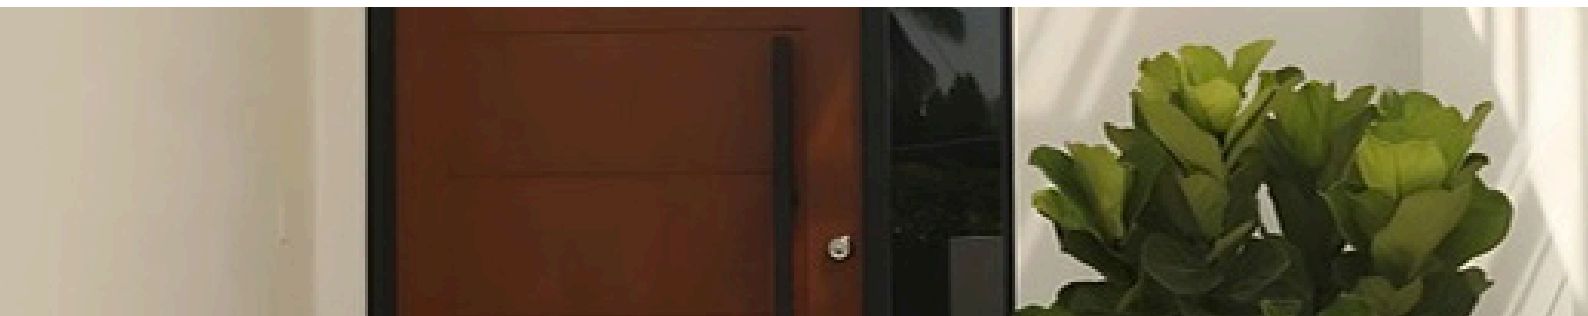

+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



SOLID DECORATIVE TIMBER WITH GLASS DOOR




+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

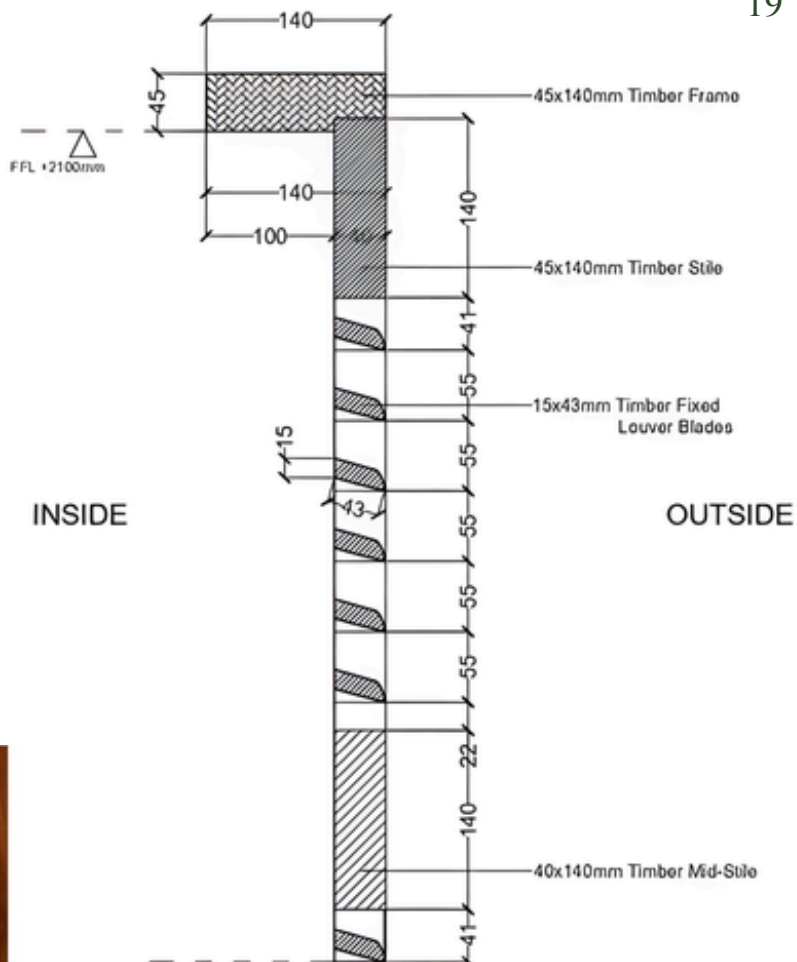

●●● SOLID DECORATIVE DOOR WITH LOUVERS



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



SOLID DECORATIVE DOOR WITH LOUVERS



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

DO YOU PREFER SIMPLICITY AND MONOCHROMATIC COLOURS?

The minimalist of decorations gives an elegant character which makes them a great means to enlarge the interior optically.

A perfect combination of modern design and high-quality workmanship.

MODERN EXCLUSIVE ●●○ DOOR



+60 88 495 000




superwoodsales@gmail.com



superwood.com.my

MODERN EXCLUSIVE ●●○ DOOR

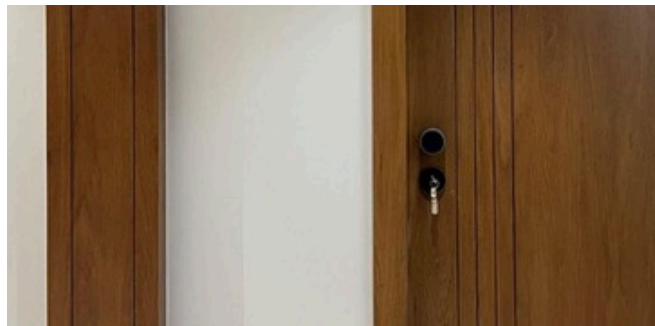

POCKET DOOR



SLIDING DOOR



INVISIBLE/FRAMELESS DOOR



MODERN
EXCLUSIVE
DOOR ●●○



+60 88 495 000




superwoodsales@gmail.com



superwood.com.my

BLACK FRAMED GLASS DOOR

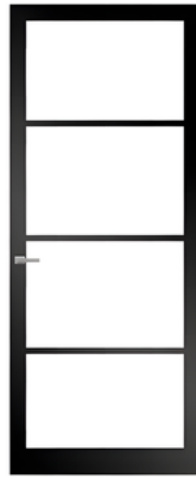

REEDED/TEXTURED GLASS PANEL DOOR



MODERN
EXCLUSIVE
DOOR ●●○



+60 88 495 000










superwoodsales@gmail.com



superwood.com.my

MODERN EXCLUSIVE DOOR ●●○

PIVOT DOOR



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



TIMBER DECKING



TIMBER DECKING ●●○

Timber Decking is also one of our products. Our company aims to design and construct superb outdoor timer decks that will complement the existing structures.

Therefore, it will enhance the natural scenery of the customer's home and make the most out of the customers living space.



Styled imagery is for inspiration only. Picture shown is not representative of our collection.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

METAL FRAME




SIZE *of* METAL FRAME




Double Rebate

W160

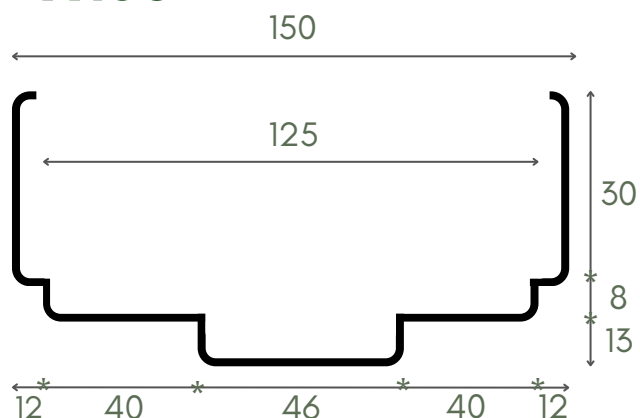

Standard


W100

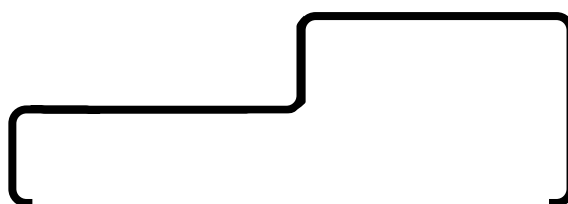

Customized

EF1

X = 150 to 300mm

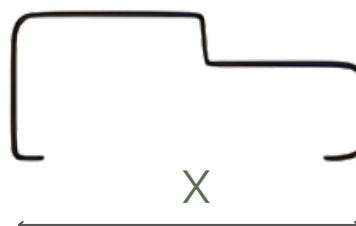

+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

SAFETY & HANDLING

- Read and fully understand ALL manufacturer's instructions before beginning. Failure to follow proper installation instructions may result in undesired operational or performance problems.
- DO NOT work alone. TWO or more people are required. Use safe lifting techniques.
- Wear complete personal protective equipment (PPE).
- Operate hand/power tools safely and follow manufacturer's operating instructions.
- Use caution when working at elevated heights.
- If disturbing existing paint, take proper precautions if lead paint is suspected.

PURPOSE

The purpose of this method statement is to install external wooden sliding door frame frame . To outline quality plan or inspection & test required during project implementation. To carry out safe working environment and comply to the safety requirements.



Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to cause cancer. Avoid inhaling wood dust or use dust mask or other safeguards for personal protection.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

STUD FRAME CLIP

Studframe clips are supplied to join unassembled frames to the studwork.

STRICKER PLATE

A stricker plate is a metal component installed on the door frame that serves as the receiving point for the door latch or bolt. It plays a key role in securing the door when closed and ensuring smooth locking functionality. It also protects the frame from indentation, or deformation caused by repeated latch impact during door operation.

BUTT HINGE

Provide a solid and rigid framework to hold and support the weight of the door. Plus, it maintain the vertical alignment of the door in the frame. Correct alignment ensures the locking mechanisms (like latches and striker plate) to line up correctly.

BRICK TIES

Brick ties are metal connectors used to anchor the metal door frame securely to the surrounding wall, especially when the wall is made of brick, block, or concrete.

SPREADER BARS

A spreader bar is a temporary metal brace or bar used to maintain the correct width and shape of a metal door frame during storage, handling, and installation. It is placed at the bottom of the frame, connecting the two vertical jambs.



RUBBER BUFFERS

It is a small rubber component typically installed on the door frame stop. It reduces noise and vibration, creating smoother & quieter closing action. Prevents dents, scratches, and damage to both the door edge and metal frame.

CORNER

Factory assembled mitre corners are welded and ground smooth. For on-site assembly, bend tabs over.

LOCATION of ACCESSORIES

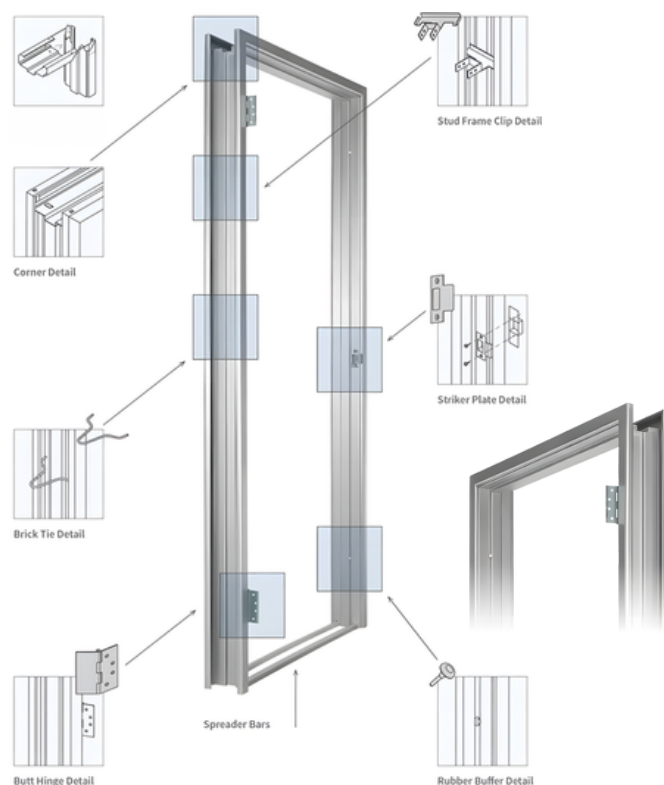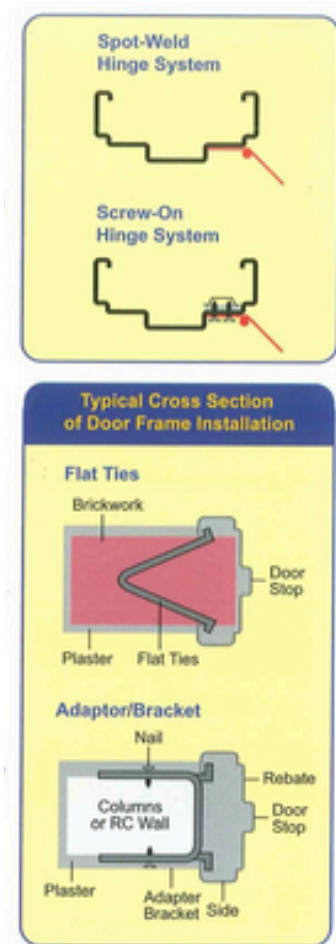

INSTALLATION

STEP 1 : PREPARE THE OPENING

- Measure the wall opening (it must match the frame size).
- Clean the area. Remove dust, debris, or protruding materials.
- Check if the floor is level and walls are plumb.

STEP 2 : ASSEMBLE THE FRAME

- Connect the head and side jambs using screws or tabs.
- Install the spreader bar at the base.
- Add brick ties or reinforcement clips as needed.

STEP 3 : PLACE THE FRAME INTO THE OPENING

- Position the frame into wall opening.
- Ensure the hinge jamb is on the correct side based on the door swing.

STEP 4 : PLUMB AND SHIM THE FRAME

- Use a level to plumb the hinge jamb.
- Insert shims behind hinges and strike areas.
- Check that the head is level and frame is square.

STEP 5 : SECURE THE FRAME

- For Drywall/Block : Use expansion anchors or screws.
- For Masonry : Use masonry anchors or fill with mortar.
- Start anchoring from the hinge side, then strike side.

STEP 6 : CHECK ALIGNMENT

- Ensure even gaps around the door.
- Make sure the frame is not twisted.
- Confirm hinge and strike plate alignment.

STEP 7 : HANG THE DOOR

- Install the door on the hinges.
- Check the swing. The door should open and close smoothly.

STEP 8 : FINAL ADJUSTMENTS

- Tighten all screws and anchors.
- Remove the spreader bar.
- Fill any gaps with insulation or caulk.
- Clean the frame & door area.






STANDARDS OF SIZES AVAILABLE

DOOR FRAME

Width	x	Height
750/760	x	2130 (Single-Leaf)
900/910	x	2130 (Single-Leaf)
1200	x	2130 (Double-Leaf)
1500	x	2130 (Double-Leaf)
1800	x	2130 (Double-Leaf)

WOODEN FRAME

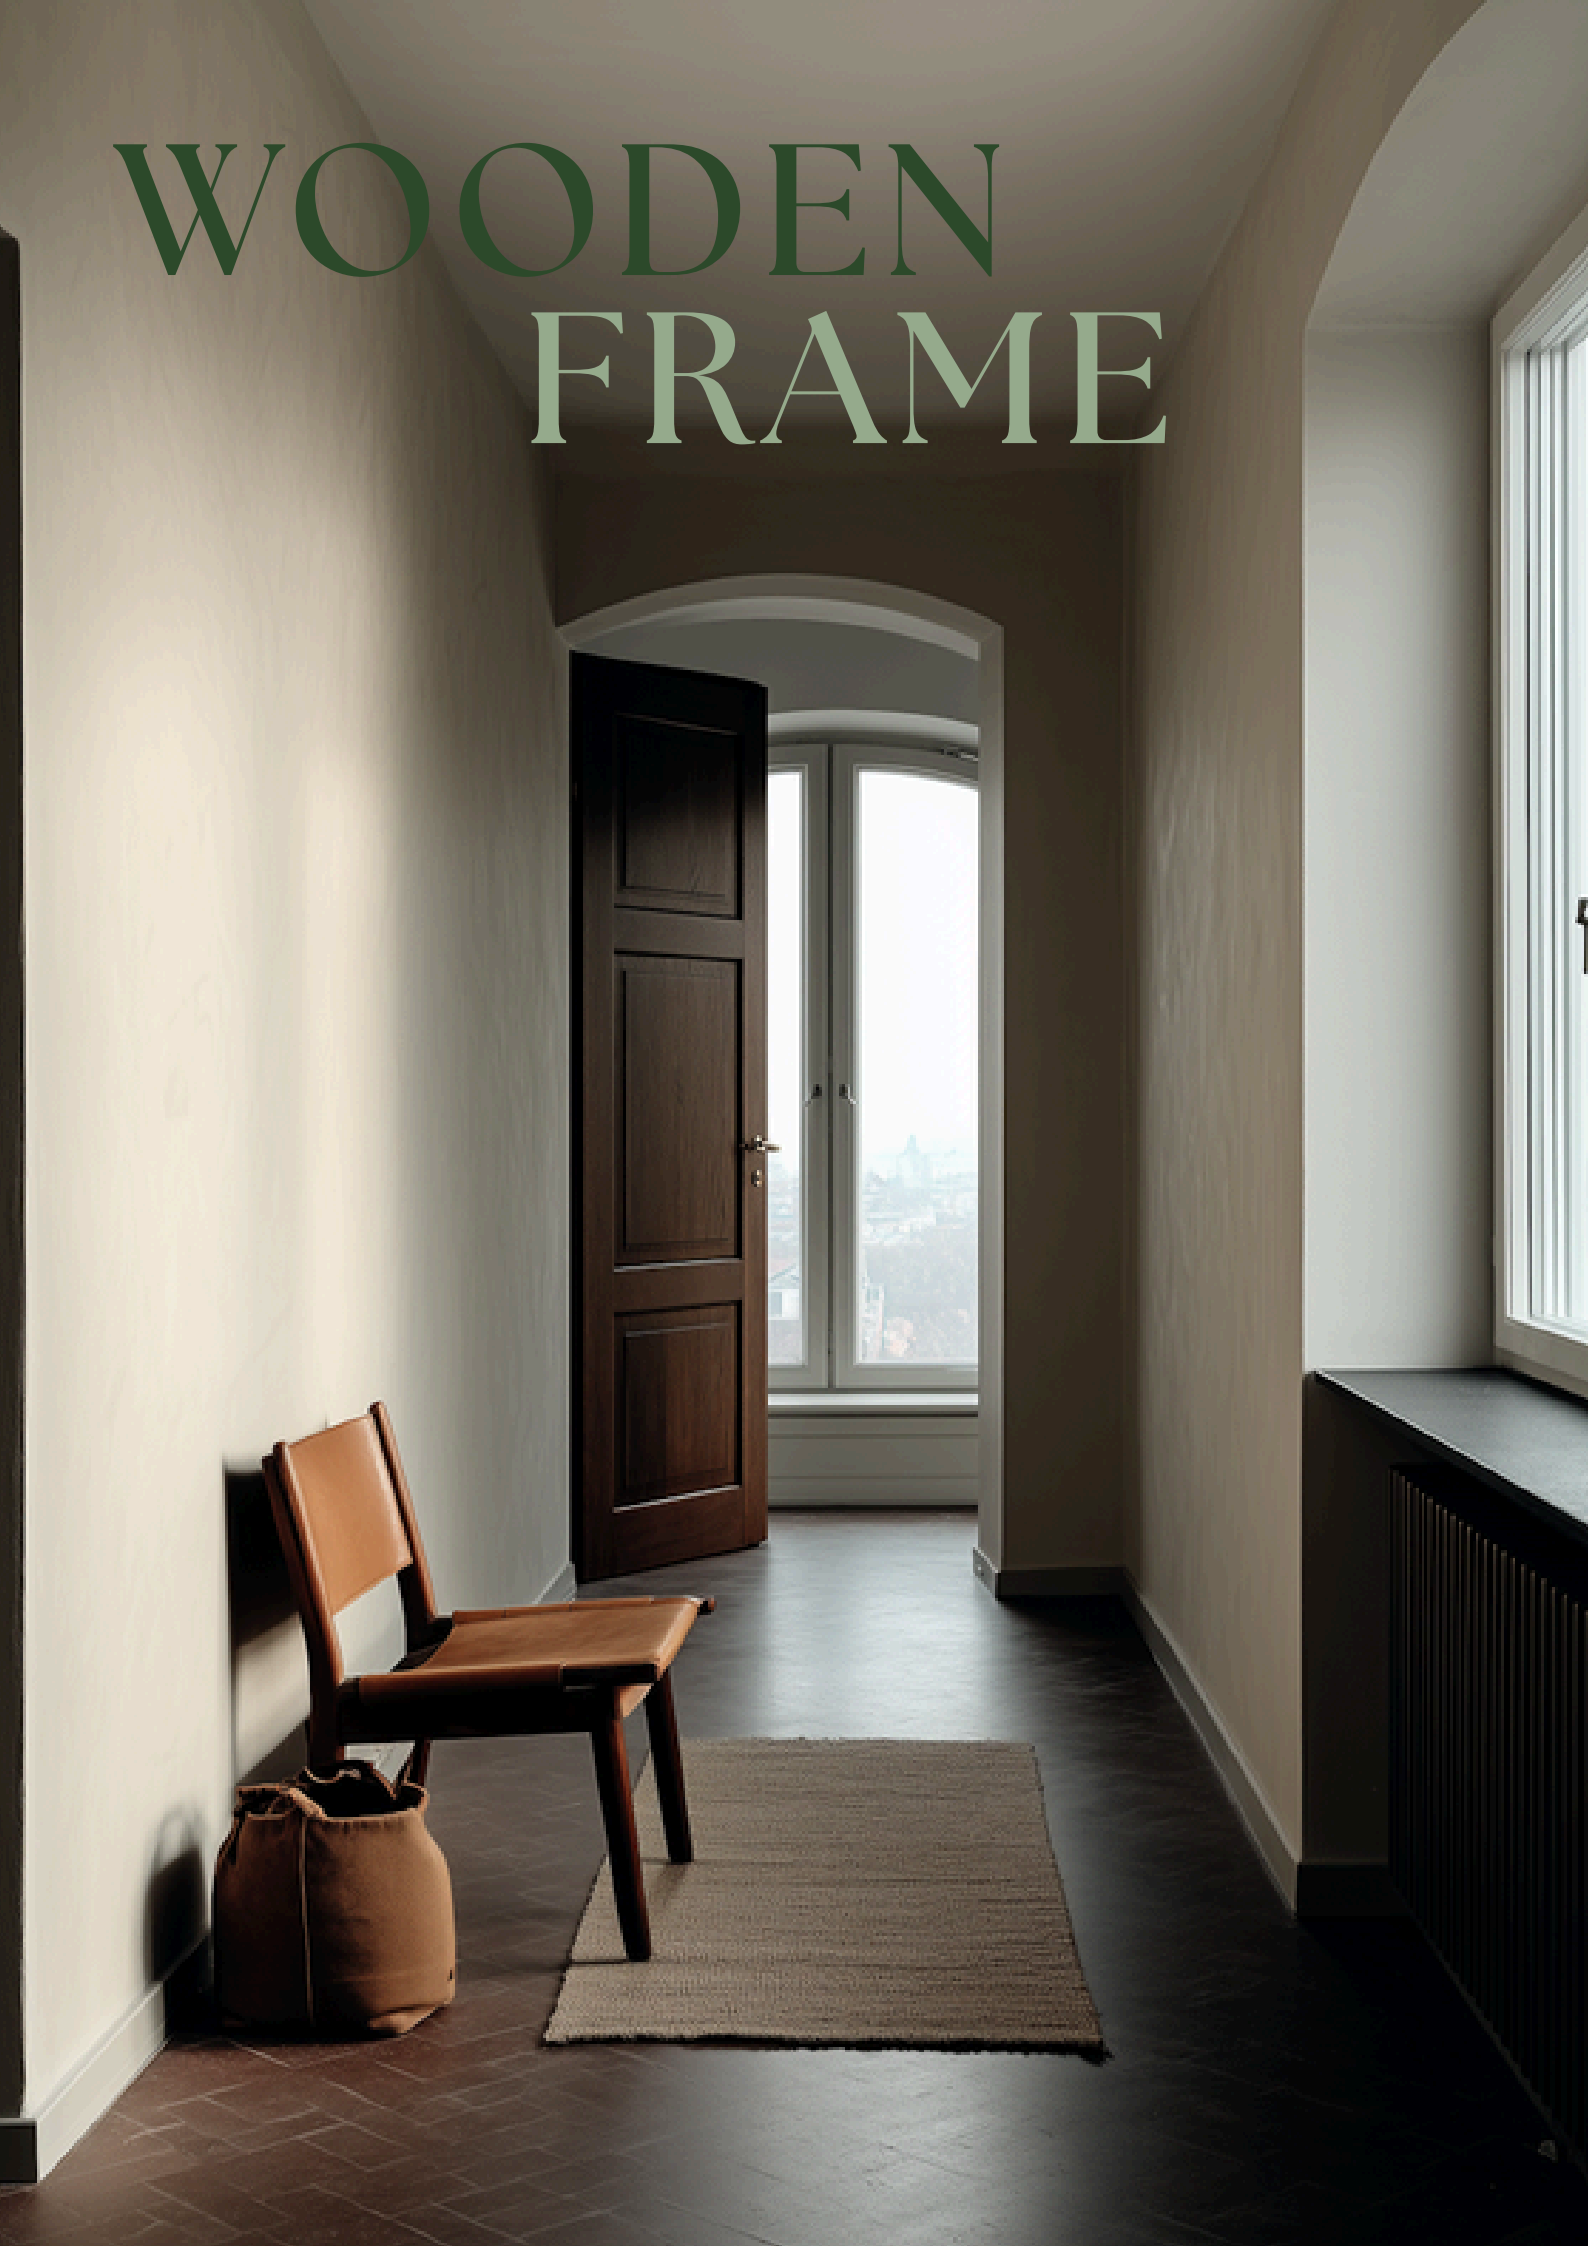




WOODEN FRAME

ABC WOODEN FRAME

ABC Quick-Fix Door System creates the ideal solution for door, frame and architrave for the modern building history. ABC Quick-Fix Door system comes fully with factory pre-finished and pre-hung lockset, hinges, and accessories. This is a cost effective system, that simplifies the work of contractors and makes the door and frame installation simple, faster and reliable.

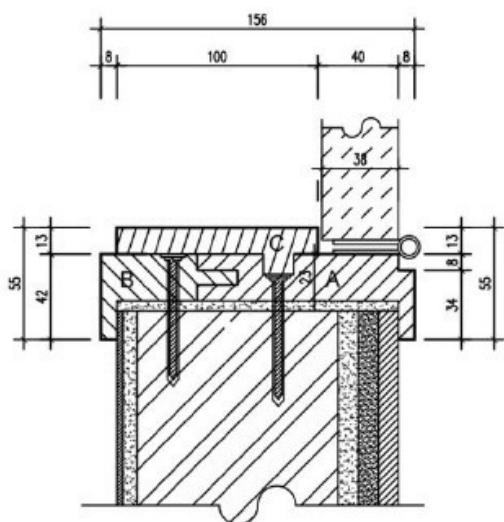


Corss-Section of "ABC Quick-Fix Doorframe and Door"

Component

A = Holding Frame Component

B = Capping Frame Component

C = Door Stop

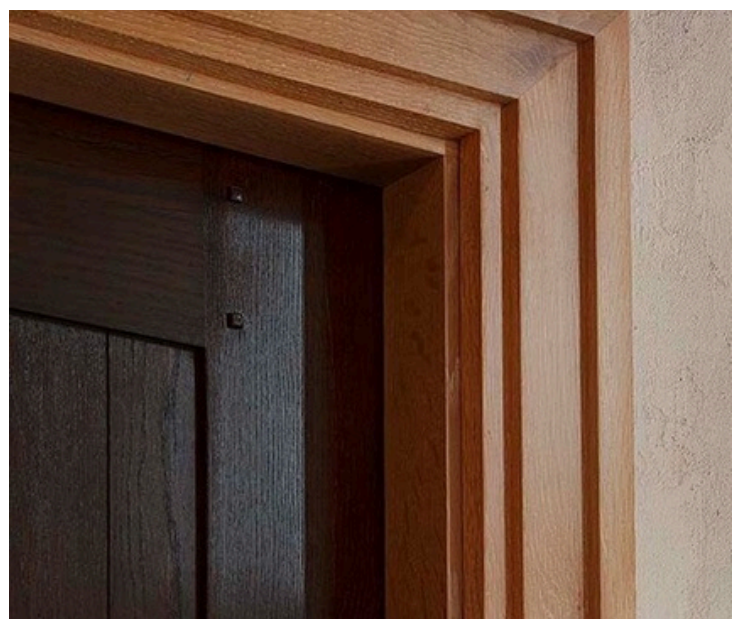

+60 88 495 000




superwoodsales@gmail.com




superwood.com.my


ABC WOODEN FRAME-SINGLE REBATE

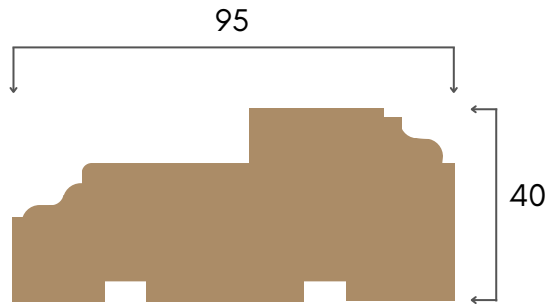


40 x 95
SW 01 DF

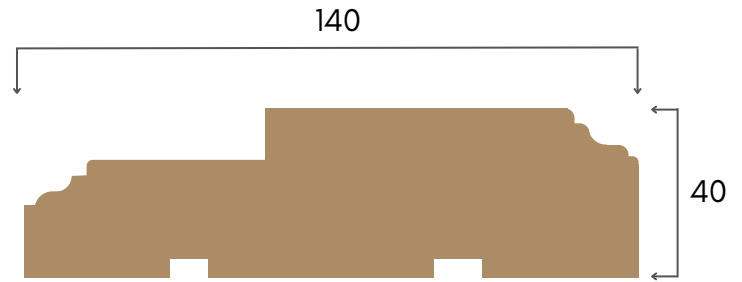


40 x 140
SW 02 DF

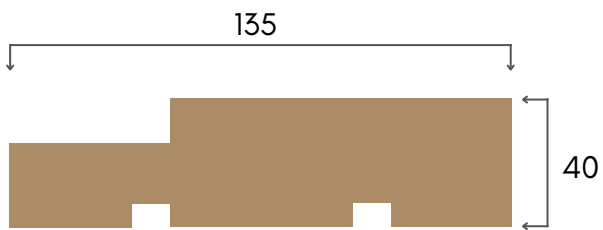

40 x 135
SW 03 DF

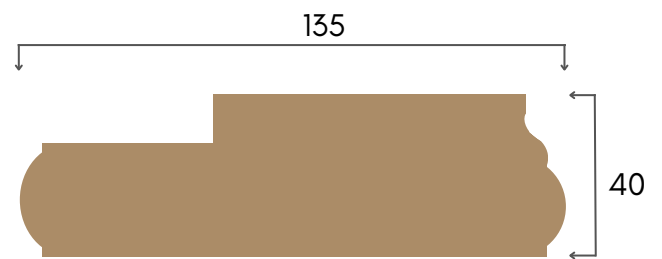

40 x 135
SW 04 DF

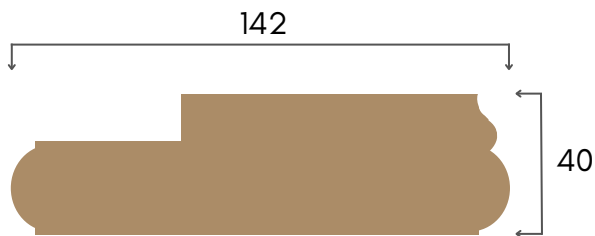


40 x 142
SW 05 DF



40 x 137
SW 06 DF




40 x 121
SW 07 DF

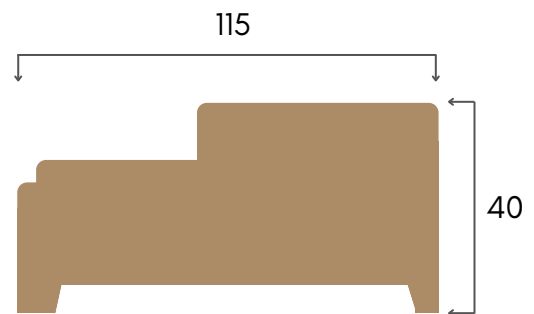


40 x 115(2)
SW 08 DF



ABC WOODEN FRAME-SINGLE REBATE

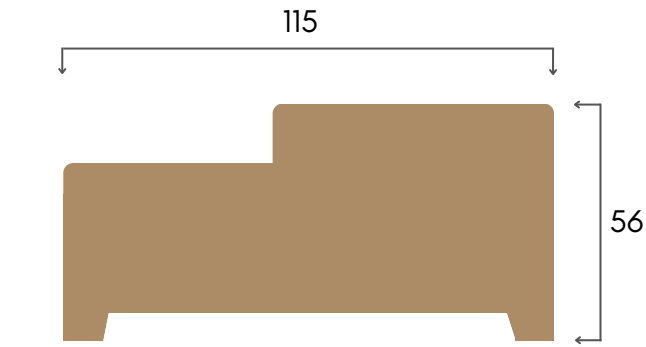

56 x 115(1)
SW 09 DF

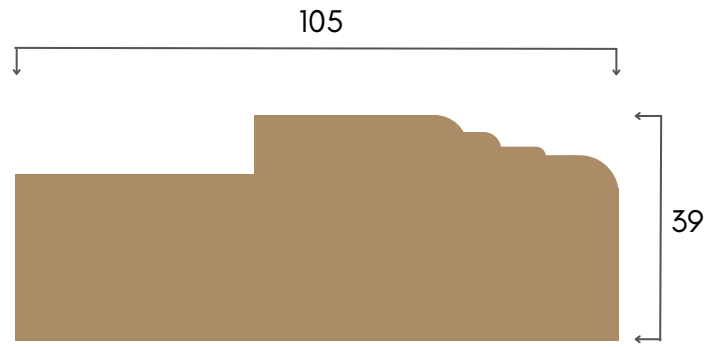

39 x 105
SW 10 DF




31 x 139
SW 11 DF




34 x 137
SW 12 DF


ABC WOODEN FRAME-DOUBLE REBATE

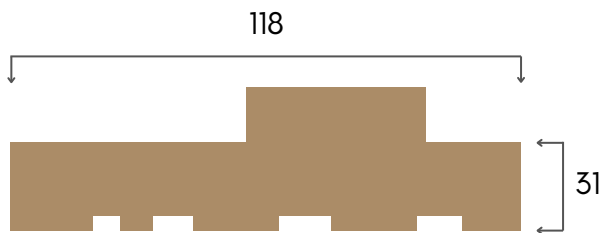


31 x 118
SW 01 DR

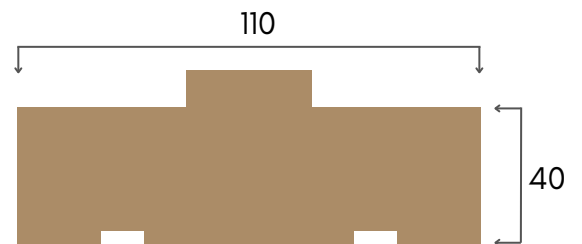

40 x 110
SW 02 DR

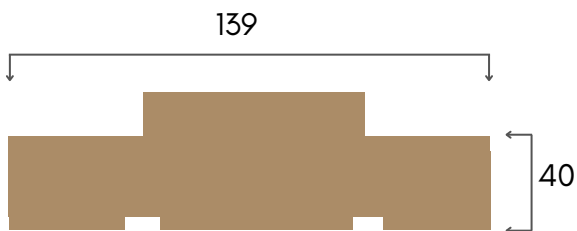

40 x 139
SW 03 DR

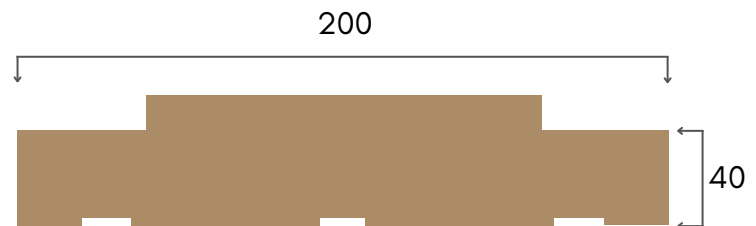

40 x 200
SW 04 DR



INTERIOR HOME FURNITURE

DESIGN & BUILD





☆ Styled imagery is for inspiration only. Furniture shown is not representative of our collection.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



Styled imagery is for inspiration only. Furniture shown is not representative of our collection.

CUSTOMIZED BUILT-IN CABINET

Where Craftmanship Meets
Luxury - By SUPERWOOD

*We bring your vision life with high-end,
custom cabinetry made to fit flawlessly.*



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

KITCHEN WOODEN CABINET

Where timeless wood meets modern elegance
- your dream kitchen starts here

*Styled imagery is for inspiration only. Furniture
shown is not representative of our collection.*



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



OFFICE CABINET

Smart storage, stylish presence - redefined your office with premium wooden cabinetry



Styled imagery is for inspiration only. Furniture shown is not representative of our collection.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

MEETING & DINING WOODEN TABLE

Designed to impress, built to connect - a wooden table perfect for both meeting & meals



Styled imagery is for inspiration only. Furniture shown is not representative of our collection.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

WOODEN CHAIR

Natural beauty, handcrafted comfort - the
charm of a classic wooden chair



*Styled imagery is for inspiration only. Furniture
shown is not representative of our collection.*



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

WOODEN DRESSER

Custom-built perfection - elevate your room with a dresser made to match your vision.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



Styled imagery is for inspiration only. Furniture shown is not representative of our collection.

BEDSIDE WOODEN TABLE

Elegance beside you - wooden bedside tables that blend beauty with function.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

FANCY PLYWOOD



FANCY PLYWOOD

- Standard Size: 1220mm x 2440mm: 1250mm x 2500mm
- Thickness: 2.5mm - 25mm
- Species: Poplar, Combi, Hardwood, MDF
- Glue: E0 Glue, E1, E2 Glue



9733



9329



9323



9525



9484



9160



9830



9465



9947

Please note that the colour and texture of products shown in this catalogue may vary slightly from the actual items due to lighting, printing process & screen settings. We recommend viewing physical samples for the most accurate representation.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

FANCY PLYWOOD

- Standard Size: 1220mm x 2440mm: 1250mm x 2500mm
- Thickness: 2.5mm - 25mm
- Species: Poplar, Combi, Hardwood, MDF
- Glue: E0 Glue, E1, E2 Glue



9040



9043



4831



3834



8484



2882



3769



7878



0792

Please note that the colour and texture of products shown in this catalogue may vary slightly from the actual items due to lighting, printing process & screen settings. We recommend viewing physical samples for the most accurate representation.



+60 88 495 000




superwoodsales@gmail.com



superwood.com.my

FANCY PLYWOOD


- Standard Size: 1220mm x 2440mm: 1250mm x 2500mm
- Thickness: 2.5mm - 25mm
- Species: Poplar, Combi, Hardwood, MDF
- Glue: E0 Glue, E1, E2 Glue

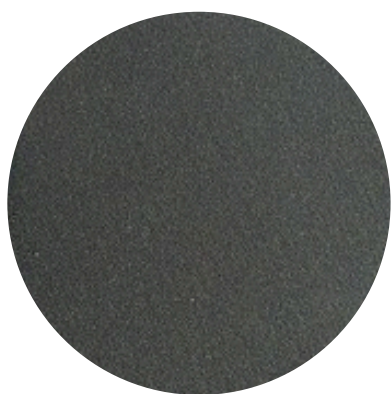

2992



2525

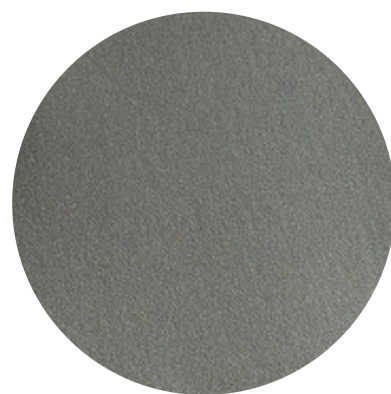

2345



9260



9190

Please note that the colour and texture of products shown in this catalogue may vary slightly from the actual items due to lighting, printing process & screen settings. We recommend viewing physical samples for the most accurate representation.



+60 88 495 000



superwoodsales@gmail.com




superwood.com.my



DOOR LAMINATE

LAMINATE DOOR FRAME

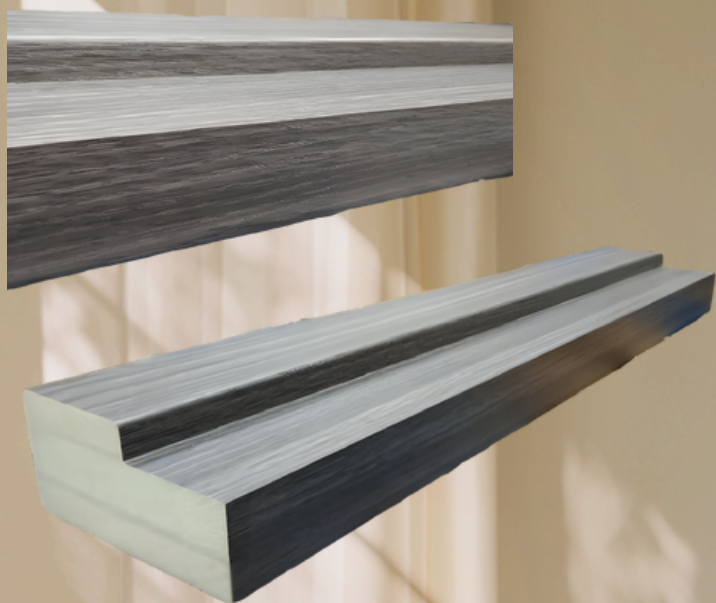

PRODUCT SPECIFICATIONS
Frame Profile

42 X 90 MM THK

Fit to Door Size: 3 ft x 7 ft
FOR SINGLE DOOR LEAF

INSTALLATION GUIDE



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

MORE LAMINATE COLOR OPTIONS



X336

Wooden Like
Color : Apple Tree



X385

Wooden Like
Color : Candlenut




X432

Wooden Like
Color : Candlenut



X322

Wooden Like
Color : Oak



X323

Wooden Like
Color : Oak Grey



NO.331

Wooden Like
Color : Walnut



X485

Wooden Like
Color : Grey



X493

Wooden Like
Color : Light Khaki



X495

Wooden Like
Color : Khaki



X332

Wooden Like
Color : Deep Walnut



X333

Wooden Like
Color : Pear Tree



X335

Wooden Like
Color : Oak



X296

Wooden Like
Color : Candlenut



X298

Wooden Like
Color : Silver



NO.301

Wooden Like
Color : Classic Oak



X148

Wooden Like
Color : Cherry



X274

Wooden Like
Color : Off-White



NO.275

Wooden Like
Color : Cherry



X306

Wooden Like
Color : Light Green



X311

Wooden Like
Color : Oak



X318

Wooden Like
Color : Rain Silver



X287

Wooden Like
Color : Oak



X289

Wooden Like
Color : Walnut



X290

Wooden Like
Color : Apple Tree



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

MORE LAMINATE COLOR OPTIONS

47



X540
Wooden Like
Color : Silver Walnut



X542
Wooden Like
Color : Euro Oak




X543
Wooden Like
Color : Silver Pine



X529
Wooden Like
Color : Oak



X530
Wooden Like
Color : Shaddock



X531
Wooden Like
Color : Sawtooth Oak



X544
Wooden Like
Color : Pine



X545
Wooden Like
Color : Silver Mapple




X546
Wooden Like
Color : Garden Grey



X537
Wooden Like
Color : Oak



X538
Wooden Like
Color : Deep Walnut



X539
Wooden Like
Color : Deep Walnut



X529
Wooden Like
Color : Oak



X530
Wooden Like
Color : Shaddock



X531
Wooden Like
Color : Sawtooth Oak



X520
Wooden Like
Color : Deep Khaki



X522
Wooden Like
Color : Silver Grey



X523
Wooden Like
Color : Mapple



X532
Wooden Like
Color : Euro Oak



X535
Wooden Like
Color : Walnut



X536
Wooden Like
Color : Deep Sanders



X524
Wooden Like
Color : Chestnut



X525
Wooden Like
Color : Mid Grey



X526
Wooden Like
Color : Mid Grey



X502
Wooden Like
Color : Walnut



X517
Wooden Like
Color : Gash Khaki



X519
Wooden Like
Color : Silver Walnut



X499
Wooden Like
Color : Mid Khaki



X500
Wooden Like
Color : Mid Khaki



X501
Wooden Like
Color : Mid Khaki



X485
Wooden Like
Color : Grey



X496
Wooden Like
Color : Candlenut



X498
Wooden Like
Color : Roma Oak



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

MORE LAMINATE COLOR OPTIONS



X840
Wooden Like
Color : Oak Grey



X841
Wooden Like
Color : Euro Oak



X843
Wooden Like
Color : Creamy



X809
Wooden Like
Color : Dark Grey



X827
Wooden Like
Color : Mid Grey



X836
Wooden Like
Color : Euro Oak



XF301
Wooden Like (Skin Feel)
Color : Grey




XF519
Wooden Like
Color : Silver Walnut




ZLMO16
Wooden Like
Color : Black



X837
Wooden Like
Color : Dark Sanders



X838
Wooden Like
Color : Mid Grey



X839
Wooden Like
Color : Dark Walnut



X782
Wooden Like
Color : Khaki



X783
Wooden Like
Color : Dark Grey



X784
Wooden Like
Color : Milan Cherry




X761
Wooden Like
Color : Shaddock



X762
Wooden Like
Color : Walnut



X763
Wooden Like
Color : Walnut



X785
Wooden Like
Color : Dark Grey



X786
Wooden Like
Color : Royal Shaddock



X787
Wooden Like
Color : Sanders



X764
Wooden Like
Color : Deep Walnut



X765
Wooden Like
Color : Dark Walnut



X766
Wooden Like
Color : Sootiness



X554
Wooden Like
Color : Oak Grey




X559
Wooden Like
Color : Khaki



X561
Wooden Like
Color : Deep Sanders



X548
Wooden Like
Color : Silver Oak



X549
Wooden Like
Color : Cedar




X550
Wooden Like
Color : Cherry



X766
Wooden Like
Color : Light Khaki



X749
Wooden Like
Color : Khaki



X750
Wooden Like
Color : Deep Grey



X551
Wooden Like
Color : Walnut



X552
Wooden Like
Color : Cherry



X553
Wooden Like
Color : Oak




PHENOLIC PAPER LAMINATE DOOR DETAILS

DETAILED PRODUCT DESCRIPTION

From daily bleached wood pulp paper impregnated with phenolic resin, drying, and hot pressing made.

- Implementation of the standard: Enterprise standard
- Color : Black
- Features: Compared with other phenolic paperboard, it has excellent mechanical properties, good humidity under normal electrical performance, suitable for cold punching, alternating heat and heat after the change in size smaller.
- Applications: Mechanical and electrical use. Due to its hot and cold after the change in size is small, suitable for fluorescent lamp head plate.

SERIAL NUMBER	TEST ITEM	UNIT	STANDARD
1	Vertical layer to bend strenght (normal)	Mpa	≥ 150
2	Heat resistance (200 C. 10 min)	-	Not Blistering
3	Water absorption	mg	≤ 140
4	Paralell layer to the insulation resistance (normal)		$\geq 1 \times 10^9$
5	Paralell layer to the insulation resistance (D48/23)		$\geq 5.0 \times 10^7$

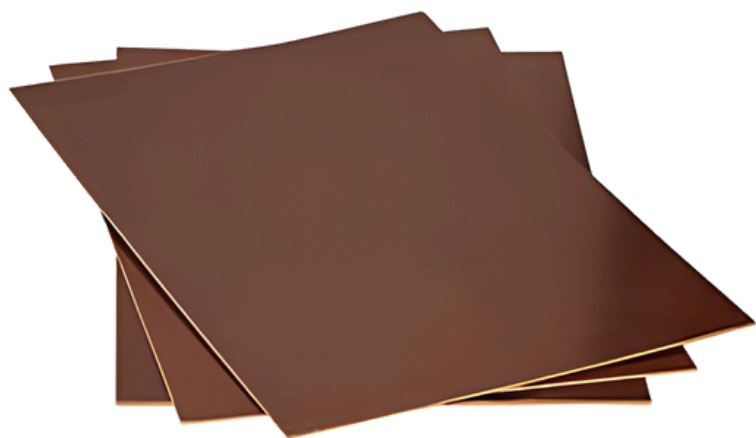

DOOR SKIN VENEER



DOOR SKIN - VENEER ●○○

- Standard Size: 2100-21500mm (Length), 600-1050mm (Width)
- Thickness: 3.0mm, 4.0mm, 4.5mm
- Material: HDF (920 - 1000 kg/ cbm)
- Face: White Colour, Natural and Engineered Veneer, Melamine
- Model: Customize



JS-001



JS-002



JS-003



JS-004



JS-005



JS-006



JS-007



JS-008



JS-009



JS-010



JS-011



JS-012



JS-013



JS-014



JS-015



DOOR SKIN - VENEER ●○○

- Standard Size: 2100-21500mm (Length), 600-1050mm (Width)
- Thickness: 3.0mm, 4.0mm, 4.5mm
- Material: HDF (920 - 1000 kg/ cbm)
- Face: White Colour, Natural and Engineered Veneer, Melamine
- Model: Customize



JS-011



JS-012



JS-013




JS-014




JS-015



OAK 01

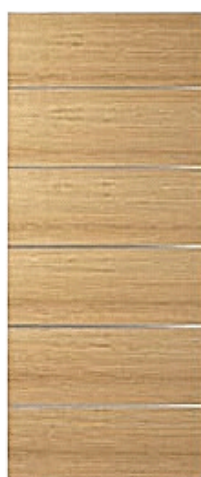

OAK 02

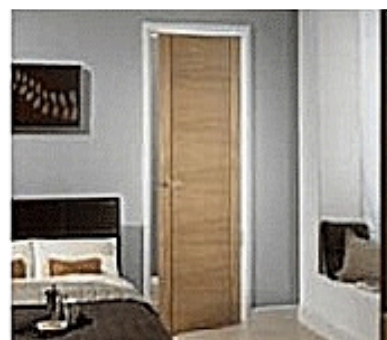

OAK 03



OAK 04





MELANINE
&
WHITE
PRIMER

DOOR SKIN - MELANINE



Q-001



Q-002



Q-003



Q-004



Q-005



Q-006



Q-007



Q-008



Q-009



Q-010



Q-011



Q-012

DOOR SKIN - WHITE PRIMER



M-001



M-002



M-003



M-004



M-005



M-006



M-007




M-008



A modern interior space featuring a large glass wall on the right and a wooden structure on the left. The wooden structure includes a door with a small handle. The glass wall reflects the sky and clouds. The text "METHOD OF STATEMENT" is overlaid on the right side of the image.

METHOD OF STATEMENT

METHOD STATEMENT ON METAL DOOR FRAME INSTALLATION

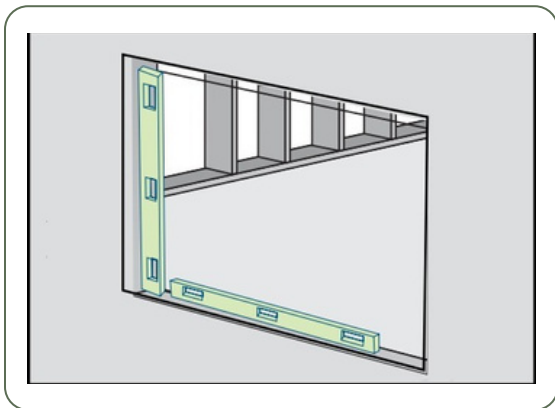

For the new construction project, the installation team should check the door opening for level, plumb, and squareness. During installation, installer should adjust the level, plumb, and squareness of the door regardless of the jambs, headers, and sills of the rough opening using shims if necessary.



SITE PREPARATION

The installation area shall be properly cleaned and cleared before commencement of work. The installation contractor shall ensure that other work will not interfere, and that traffic through the installation area is reduced to a minimum.

The door installation supervisor shall ensure that all items that could be a hindrance to handling of the door during installation or items that may be damaged during the installation work period are carefully removed from the area.

All previously installed panels, flooring, electrical equipment's etc., shall be properly covered to ensure that any damage from door installation work is avoided.

The installation contractor shall be responsible for proper system for door transportation and lifting of the door into the installation zone.

The installation supervisor shall, prior to commencement of work ensure that HSE are strictly complied with.



STEP 1 : PREPARATION

- 1 Locate the frame at the door opening location. Verify that the frame opening number matches the actual opening location number.
- 2 Compare the handing and size of the frame to the drawing.
- 3 Check the hardware schedule
- 4 Verify that the proper hardware reinforcements are installed on the frame. Also verify the hinge size, strike type and closer mounting.
- 5 The floor finish will affect the way the door should be installed. Determine if the floor finish will be :
 - a. Concrete
 - b. Carpet
 - c. Wood
 - d. Tile
- 6 Next, determine if the floor finish will be concrete, carpet, wood, or tile.
- 7 Adjust the frames to match the floor finish thickness.
- 8 Stand the frame up in the wall line at the proposed location. Then, place the properly sized spreader between the hinge and strike jambs at the floor



Diagram 1.1 Pre-welded Frame



Diagram 1.2 Spreader



STEP 2 : SETTING THE FRAME PLUMB, LEVEL & SQUARE

- 1 Anchor the base anchors to the floor on each jamb using a concrete screw or drive pin anchor. Install a minimum of six anchors. Place three on the hinge jamb and three on the strike jamb.
- 2 Proper anchor spacing is important. An anchor must be above each hinge and directly across at the same height on the strike jamb.
- 3 Place another mid-frame spreader in between the hinge and strike jambs to keep the frame straight and aligned.
- 4 Check the head of the frame for level accuracy. If necessary, adjust the base anchors to achieve a level head and proper floor clearance.
- 5 Move the studding in place and begin screwing the studs to the track at the bottom. Install the screws on each side of the stud.
- 6 Once the base of the stud is anchored, proceed with securing the studs against each jamb to the top steel stud plate. Then, install screws on both sides of the stud.
- 7 Install the header above the frame. The studs should be perpendicular to the steel stud track. The dimension between the jambs should be the same at the top and bottom of the frame.
- 8 Check the frame again for plumb, level and square accuracy.
- 9 Secure the top steel stud anchor on the strike jamb with screws. Check the hinge and strike jambs for plumb accuracy in all directions.
- 10 Position the top of the hinge jamb to the stud so that it will accept the proper thickness drywall on each side.
- 11 Bend the anchor ear around the stud to hold the anchor in place.
- 12 Attach the anchor to the stud with the screw provided. Check the frame for plumb. Making sure the frame is plumb, level, and square ensures that the door will operate properly when installed.



Diagram 1.3 Proper
Anchor Spacing



STEP 3 : COMPLETING THE INSTALLATION

- 1 Verify the dimension and trueness of the frame, then screw the remainder of the frame anchors into the studs. Secure each anchor with a minimum of two screws.
- 2 When using wood stud anchors, bend the areas tightly against the stud.
- 3 After the frame is secure to the studs and tightly anchored, check it
- 4 If the opening requires it, verify electrical wiring needs.
- 5 The drywall installer should check that the frame is plumb, level and square before hanging the drywall. The installer should avoid excessive shoving of the drywall into the hinge, strike or head jams because this may throw the frame out of alignment.
- 6 Spreaders should be left in place during hanging of drywall to help prevent the frame from being knocked out of plumb.



STEP 4 : VERIFICATION

- 1 Check the frame again for trueness before screwing the drywall off to the perimeter studs around the frames.

- 2 The frame installation is now complete.

Diagram 1.4 Final Check for Trueness



METHODS STATEMENTS FOR PROTECTING AND STORING DOOR LEAF AND DOOR FRAME



LOCATION & METHOD OF STORAGE

Identify a designated storage area for door leaves and frames that is secure, dry, and away from high-traffic areas to minimize the risk of damage.



DOOR FRAME MUST BE ARRANGED NEATLY

Store door leaves and frames horizontally to prevent warping or distortion. Use supports to keep them level and avoid pressure points.



REFRAIN FROM SITTING ON THE DOOR FRAME


Do not sit on the door frame, as this could lead to damage. Door frames are not designed to bear the weight of a person sitting on them, and doing so could cause deformation or breakage, impacting both the functionality and appearance of the door.



REFRAIN FROM REMOVING PROTECTIVE COVERING

Please make sure not to remove the protective covering to avoid damage. These coverings are designed to protect surfaces from scratches, dirt, and other forms of harm, while also helping to maintain the quality and appearance of the product. It is crucial to maintain the integrity of the covering until installation is complete to protect the door leaves and frames.



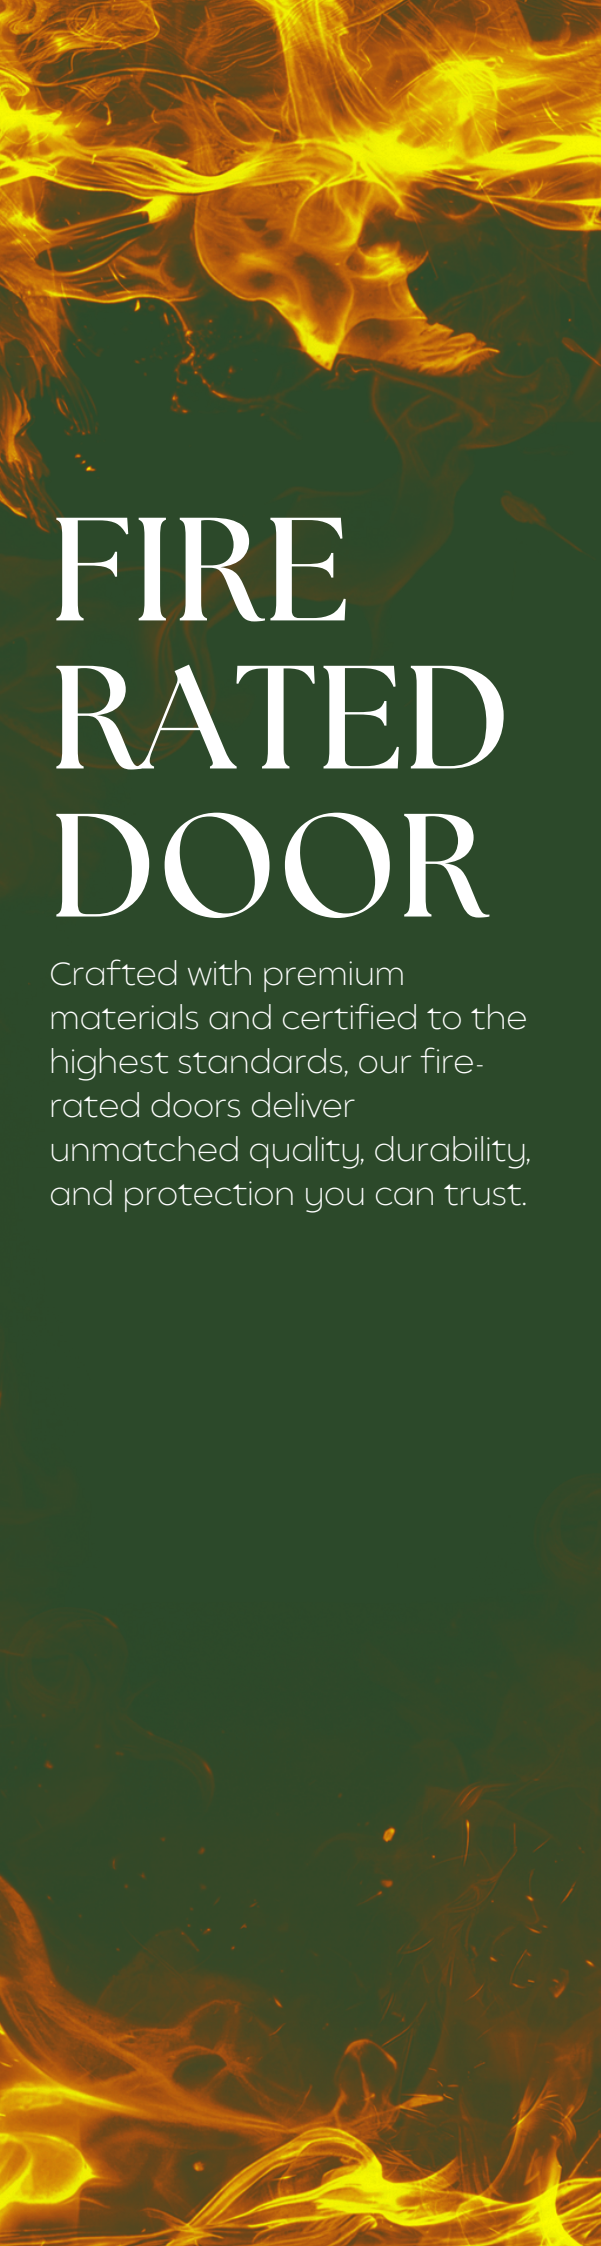

FIRE RATED DOOR

Crafted with premium materials and certified to the highest standards, our fire-rated doors deliver unmatched quality, durability, and protection you can trust.



APPLICATION OF FIRE RATED DOOR



SUPERWOOD's fire resistant door is applicable to any domestic, commercial, industrial, government building such as :

- Condominium
- Flats
- Hotels
- Hospitals
- Shop Office
- Office Buildings / Blocks
- Factories
- Shopping Complex



SINGLE | DOUBLE LEAVES (1-Hour Rating)

Fire Rating (1-Hour Rating)	Door Core Solid Core	Door Finishes Plywood, Paint	Max. Door Height 2400mm
Vision Panel Rectangular Max. Dimension 150mm x 300mm	Door Lipping ABS, Timber	Door Frame Galvanized Steel, Timber Hardwood	Max. Door Width 1200mm (S) 2400mm (D)
			Min. Door Thickness 44mm

SINGLE | DOUBLE LEAVES (2-Hour Rating)

Fire Rating (2-Hour Rating)	Door Core Solid Core	Door Finishes Plywood, Paint	Max. Door Height 2400mm
Vision Panel No Vision Panel Full MGO	Door Capping ABS, Timber	Door Frame Metal Only	Max. Door Width 1200mm (S) 2400mm (D)
			Min. Door Thickness 50mm



Rectangle
Vision Panel

SUPERWOOD's fire resistant door playing an important role in saving lives by slowing down the spread of fire. It meets building regulation specialty where they need to be fitted in commercial settings.



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

APPROVED FIRE RESISTANT DOORSET SYSTEM



1-HOUR RATING

1-hour fire resistant doorset system is constructed from solid core design, fabricated from high performance fire resistant board complete with both sides plywood finish and edged with timber lipping. Minimum door thickness is 44mm.


CROSS SECTION OF DOOR LEAF




2-HOUR RATING

2-hour fire resistant doorset system is constructed from solid core design, fabricated from high performance fire resistant board and edged with metal capping. Minimum door thickness is 48mm.

CROSS SECTION OF DOOR LEAF

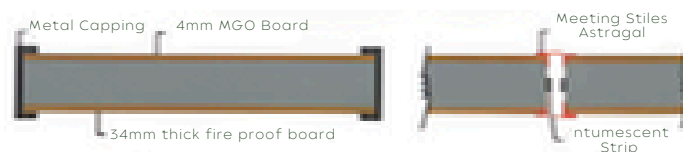

STRUCTURE & HARDWARE

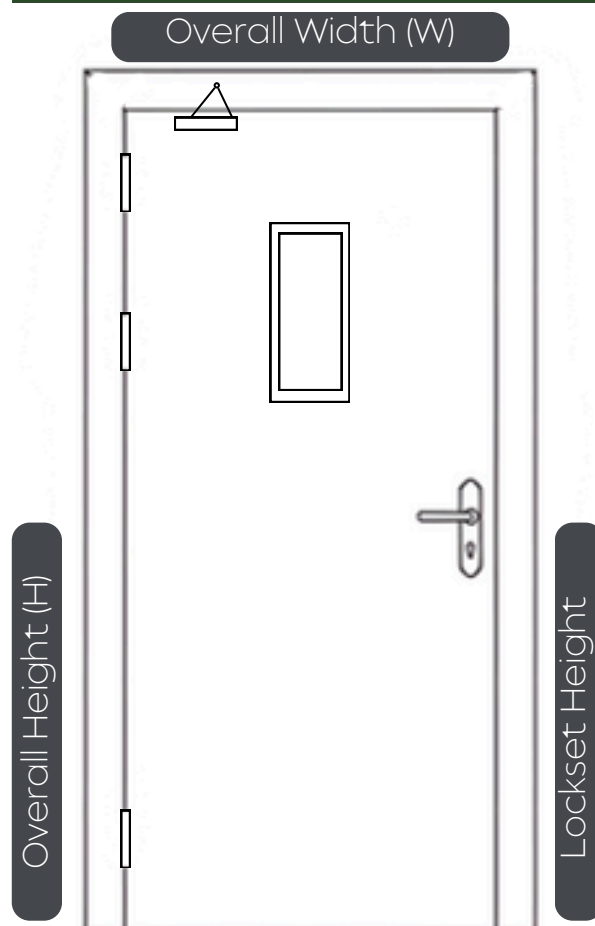

DOOR SECTION




Timber Hardwood
Door Frame

DOOR FRAME PROFILE



Single Rebated




Double Rebated



DOOR LIPPING



ABS Edging



Timber Edging



MEETING STILE



ABS Meeting Stile (For Double Leaves)




Timber Meeting Stile (For Double Leaves)



STRUCTURE & HARDWARE



Overall Width (W)

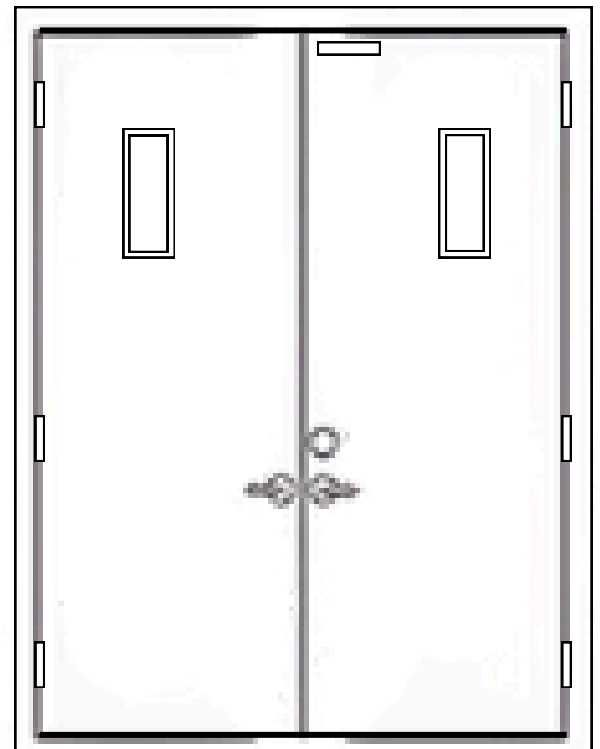


Overall Height (H)


DOOR SECTION




DOOR FRAME PROFILE



Single Rebated



Double Rebated



DOOR LIPPING



Metal Capping

MEETING STILE



Metal Meeting Stile (For Double Leaves)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

STRUCTURE & HARDWARE



Lever Handle



Cylinder Lock



Mortise Lock Case



Hinges



Aluminium Lace



Wire Glass



SUPERWOOD'S fire rated door is characterized by its quality material, providing structural reinforcement for greater functional reliability, meanwhile raising the installation efficiency of the fire resistant door.



Door Closer



Concealed Door Closer



Digital Lock



Half Dome Door Stopper



Door Viewer



Door Coordinator
(Double Leaves Only)



Auto Flush Bolt
(Double Leaves Only)



Rebated Part
(Double Leaves Only)

FEATURE



Fire
Resistant



High
Temperature



Long Lasting
Colour



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



SUPERWOOD INDUSTRIES SDN BHD
YOUR TRUSTED FIRE RATED DOOR




**FIRE RESISTANT
DOORSET SYSTEM**


APPROVED BY



DETAILS OF DOORSET - 1 HOUR RATING

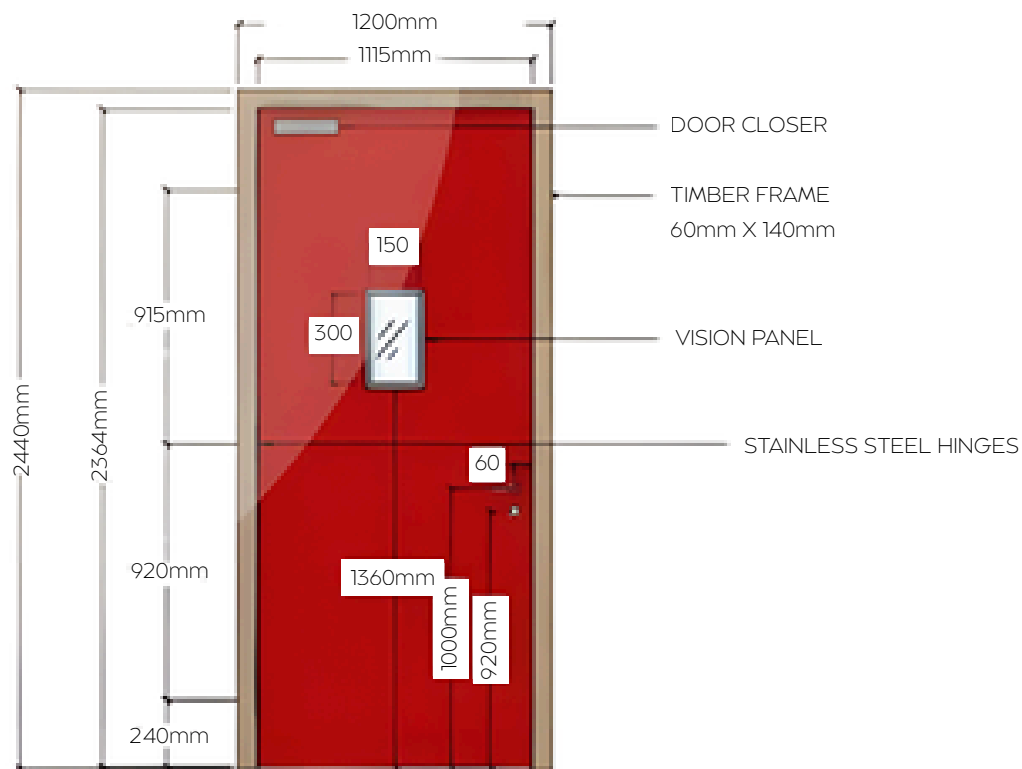

DOOR FRAME SIZE - SINGLE LEAF

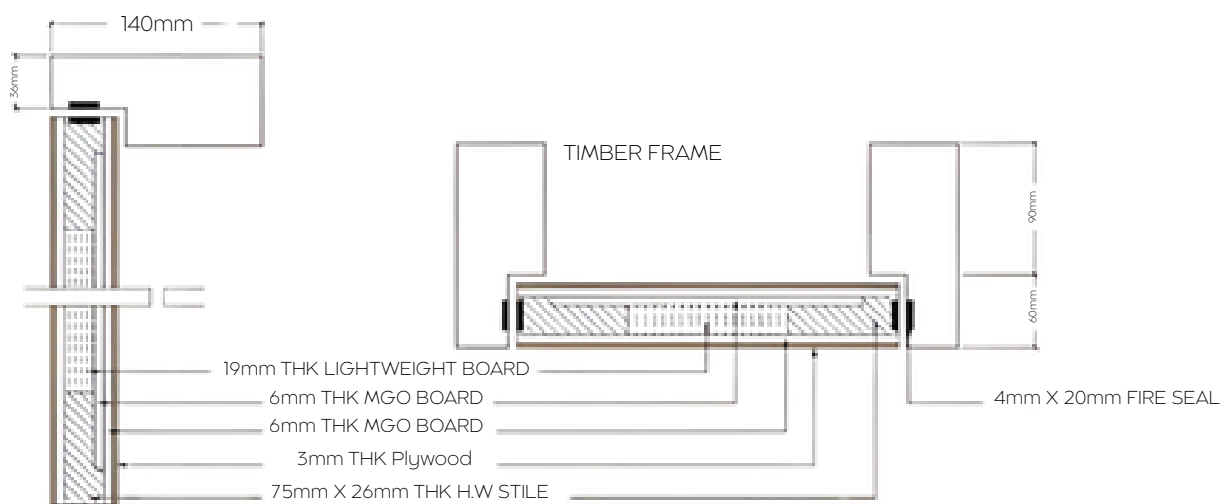

VERTICAL SECTION


HORIZONTAL SECTION




GLASS CROSS SECTION



DETAILS OF DOORSET - 1 HOUR RATING

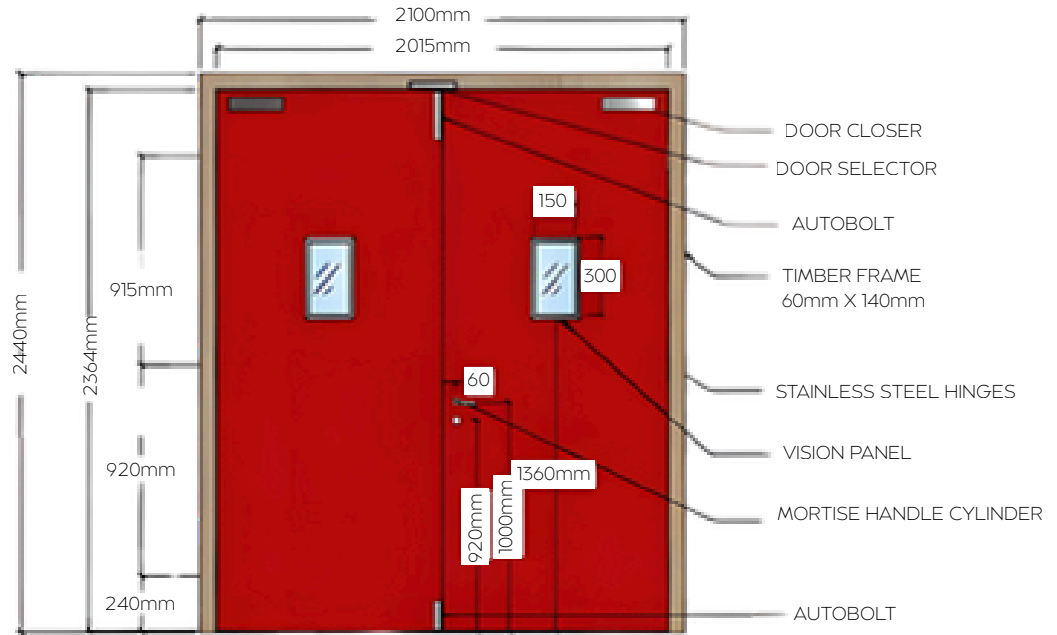


DOOR FRAME SIZE - DOUBLE LEAF

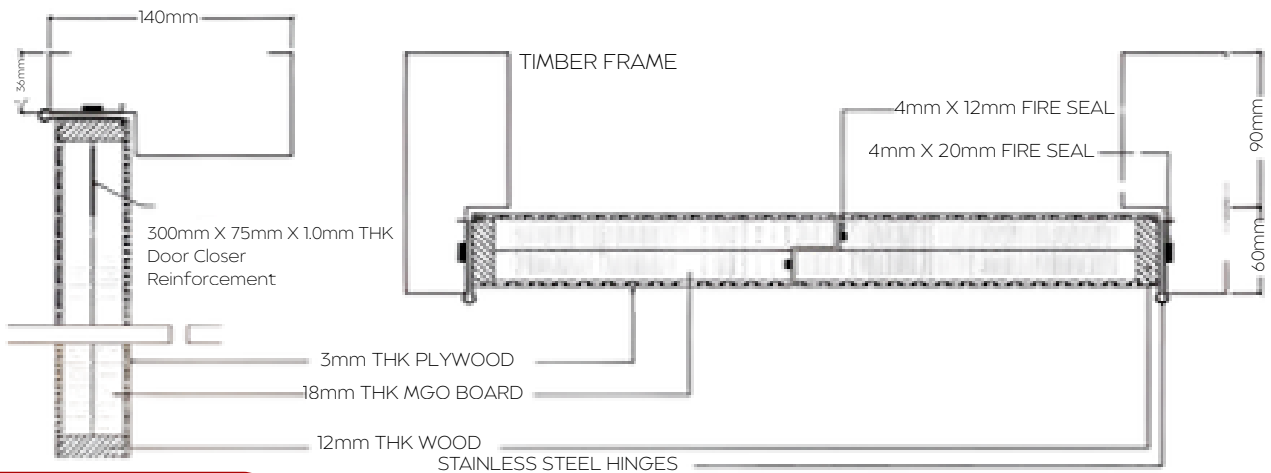

VERTICAL SECTION

HORIZONTAL SECTION

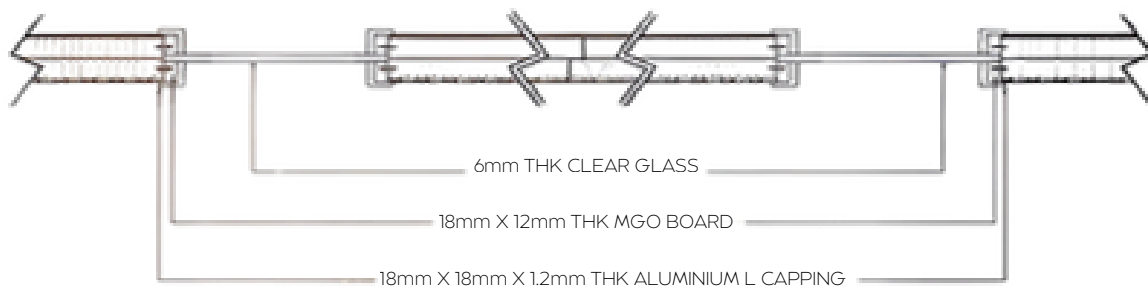

GLASS CROSS SECTION





1 HOUR RATING




PLATICO 1-hour fire resistant doorset system is constructed from solid core design, fabricated from high performance MGO board complete with both sides plywood finish and edged with timber lipping. Overall thickness is min 50mm.

The fire rated timber frame to finish size \pm 35mm X 140mm complete with fire seal.


PLATICO is tested and approved to the current Malaysian Standard of MS 1073, Part 3: 1996

PLATICO offers durable, integrity and insulation features with total commitment for the contemporary construction section.

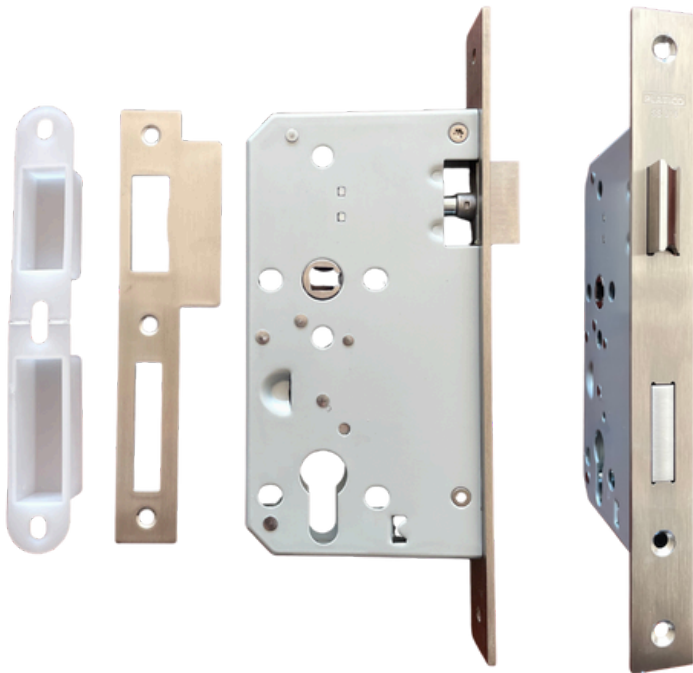

**PRODUCT INCLUDED :****PLATICO****MORTISE LOCK**

Item Description	Platico SS316 Hollow Level Handle (DIA19X140X60MM) with SS316 Sash Lock and Thumbturn Cylinder with key
Material	SS316 Stainless Solid, Solid Brass

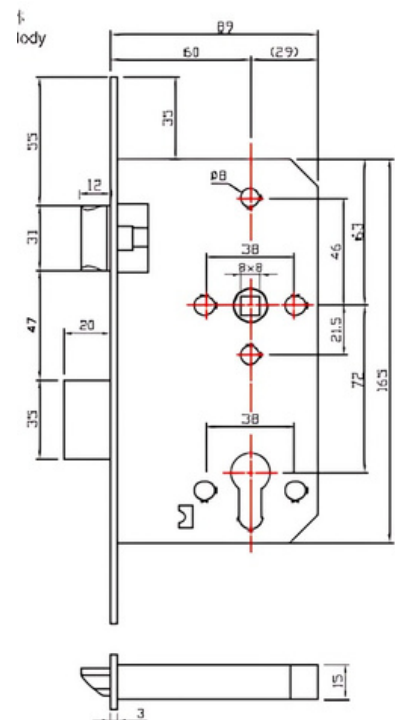**APPROVED BY****BOMBA****SIRIM**


+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

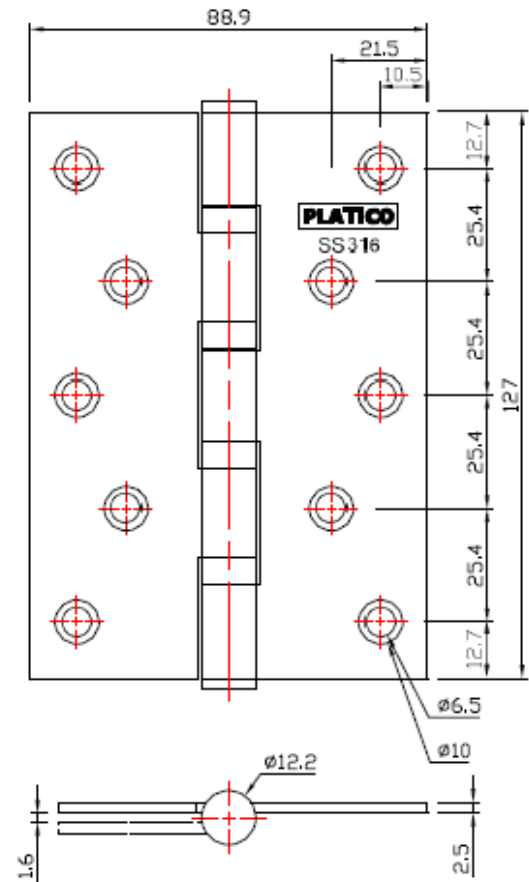
PLATICO
DOOR HINGES

Item Description	Platico (127MM X 89MM X 2.5MM) 4BB SS316 HINGE
Material	SS316 Stainless Solid

APPROVED BY



BOMBA



SIRIM




+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

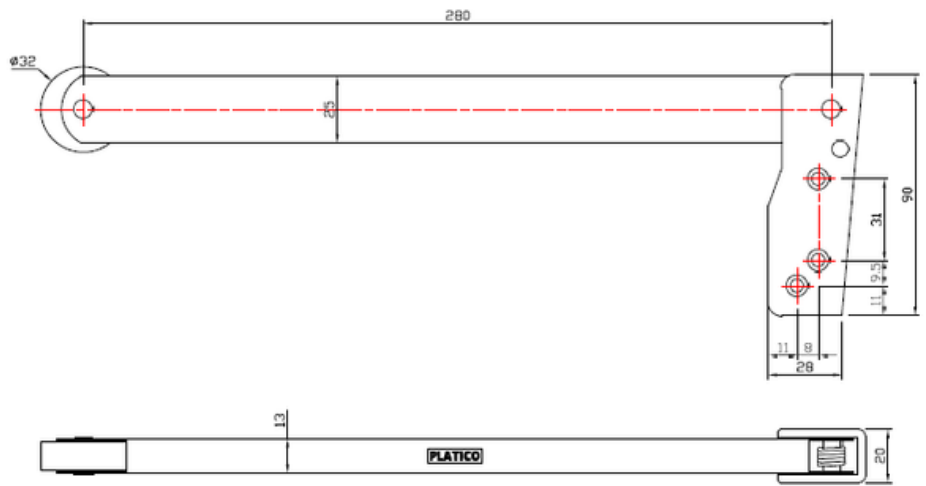

DOOR COORDINATOR

Item Description	Platico Door Coordinator SS304 (280MM X 90MM)
Material	SS304 Stainless Steel

APPROVED BY




BOMBA



SIRIM



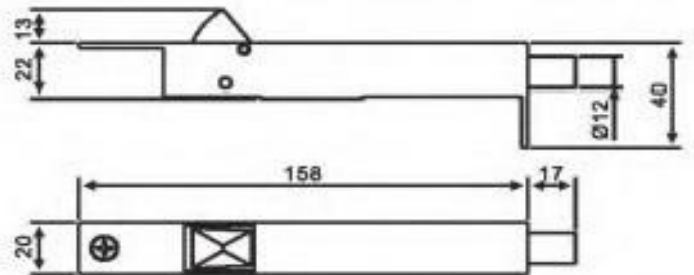

AUTO FLUSH BOLT

Item Description	Platico Automatic Flush Bolt SUS304 (158MM X 202MM X 22MM)
Material	SS304 Stainless Steel

APPROVED BY




BOMBA



SIRIM



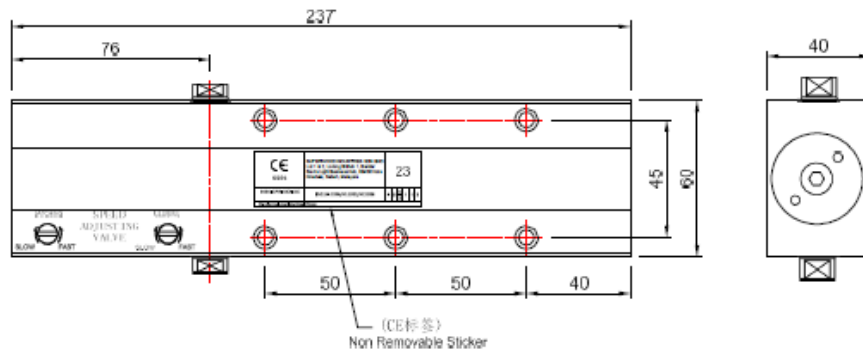

PLATICO

DOOR CLOSER

Item Description	Platico UL Door Closer EN4 - EN6
Material	Aluminium Alloy Body

APPROVED BY



BOMBA



SIRIM




+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

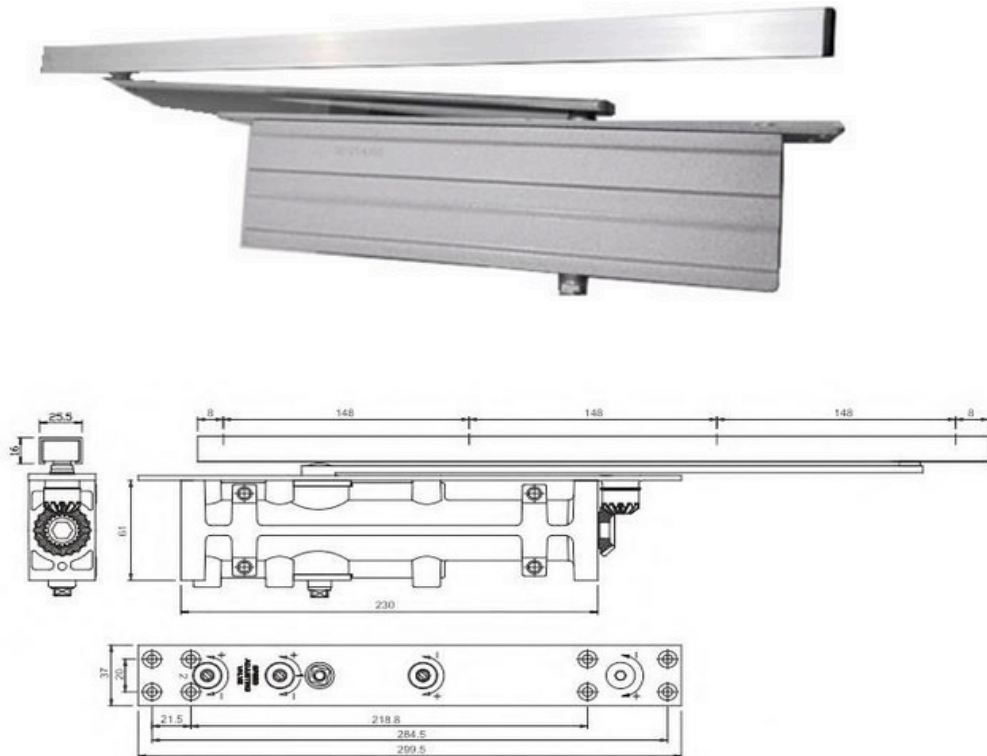
PLATICO

CONCEALED DOOR CLOSER

Item Description	Platico UL Fire Rated Concealed Door Closer
Handling	Non Handed ; Reversible
Closing Force	Available in sizes 2-4, adjustable spring
Material	Die Casting Aluminium Body ; Silver
Back Check	Standard

APPROVED BY



CERTIFICATIONS

No Perakuan : JBPM.IP.RNP:700-7/2/3-873(3)
(SEDIA ADA)



Jabatan Bomba dan Penyelamat Malaysia
SIJIL PEPASANGAN KESELAMATAN KEBAKARAN

Pintu Api / Fire Door

MS 1073: Part 3 Method for Determination of the Fire Resistance (Type of Doorsets)

Dengan ini diperakui
SUPERWOODINDUSTRIESSDN BHD
(PL/TF/ONE/SL-1)

Beroperasi di
24KM, JALAN TUARAN (TELIPOK),
TUARAN,
88450 KOTA KINABALU, SABAH

TELAH BERDAFTAR
TEMPOH SAH PERAKUAN : 06/06/2025 HINGGA 05/06/2027



t.t

.....
Ketua Pengarah
Jabatan Bomba dan Penyelamat Malaysia

****Peringatan:**

Sila patuhi sepenuhnya syarat-syarat dan had kegunaan seperti dalam Lampiran A1

(Sijil ini adalah cetakan berkomputer dan tidak memerlukan tandatangan)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

LAMPIRAN A1

No. Fail: **JBPM.IP.RNP:700-7/2/3-873(3)**No. Siri: **2022/S6/5482/SL**

Jenis Alat Kelengkapan

:PINTU API / FIRE DOOR

Jenama & Spesifikasi

:Brand: PLATICO

Model: PL/TF/ONE/SL-1

Type: SINGLE LEAF TIMBER FRAME

Tahap Ketahanan Api: 1 Hour

Door Leaf: 2384mm(h) x 1120mm (w) x 44mm(t)

Door Frame: 2425mm(h) x 119833 (w) x 140mm(d)

Type of Frame: Timber Frame

Door Core:

- Type of Material: Magnesium Oxide Boards (MgO)
- Density: $\pm 1029 \text{ kg/m}^3$
- Thickness: 19mm mm
- Others: The core was infilled in the void areas within the door framework

Framework:

- Type of Material: Selangan Batu - finger jointed and laminated
- Density: $\pm 887 \text{ kg/m}^3$
- Thickness: 60mm mm
- Others: The timber frame is erect and joined using hex screw and nail gun then fixed to a brick wall using cement sand mortar. Any gaps and voids between the frame and brickwall were filled with mortar.

Ironmongeries / Hardwares:

- Brand of Door Closer: EQQO
- Brand of Mortise Lockset (Lockcase / Cylinder / Lever): EQQO
- Brand of Hinges: EQQO
- Brand of Eye Viewer: NIL

Vision Panel Size: 157mm(w) x 306mm(h) x 7mm(t)

Tahap Rintangan Api

:Integriti: 61 min

Insulasi: 61 min

Nama & Alamat Pengeluar

:SUPERWOOD INDUSTRIES SDN BHD

No. Laporan Ujian/Tarikh

:FRIM FPL 2022032185 22/08/2022

Jenis Skim Pensijilan Barangan

:FRIM Product Certification (FRIM)

No. Skim Pensijilan Barangan

:FRIM PCS F524-10/7

Tempoh Sah Laku

:03/10/2025

Ulasan Pegawai Proses

:PRA 1 JAM (SEDIA ADA)

Ulasan Mesyuarat

:

Muka Surat 1 / 5



Had Kegunaan

**RESEPSI KONSEPT HENDAK DILAMPAIRAN UJIAN DAN UBBL
1984 SERTA PERLU MEMATUHI SYARAT-SYARAT TAMBAHAN
SEPERTI DI LAMPIRAN A2 & A3.**

Tempoh sah perakuan: 06/06/2025 hingga 05/06/2027

SAMPLE

Muka Surat 2 / 5



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

No Perakuan : JBPM.IP.RNP:700-7/2/3-874(3)
(SEDIA ADA)



Jabatan Bomba dan Penyelamat Malaysia
SIJIL PEPASANGAN KESELAMATAN KEBAKARAN

Pintu Api / Fire Door

MS 1073: Part 3 Method for Determination of the Fire Resistance (Type of Doorsets)

Dengan ini diperakui
SUPERWOODINDUSTRIESSDN BHD
(PL/TF/ONE/DL-1)

Beroperasi di
24KM, JALAN TUARAN (TELIPOK),
TUARAN,
88450 KOTA KINABALU, SABAH

TELAH BERDAFTAR
TEMPOH SAH PERAKUAN : 06/06/2025 HINGGA 05/06/2027



t.t

.....
Ketua Pengarah
Jabatan Bomba dan Penyelamat Malaysia

****Peringatan:**

Sila patuhi sepenuhnya syarat-syarat dan had kegunaan seperti dalam Lampiran A1

(Sijil ini adalah cetakan berkomputer dan tidak memerlukan tandatangan)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

LAMPIRAN A1

No. Fail: **JBPM.IP.RNP:700-7/2/3-874(3)**No. Siri: **2022/S6/5483/DL**

Jenis Alat Kelengkapan

:PINTU API / FIRE DOOR

Jenama & Spesifikasi

:Brand: PLATICO

Model: PL/TF/ONE/DL-1

Type: DOUBLE LEAF TIMBER FRAME

Tahap Ketahanan Api: 1 Hour

Door Leaf: 2380mm(h) x 2012mm(w) x 45mm(t)

Door Frame: 2425mm(h) x 2095mm(w) x 140mm(d)

Type of Frame: Timber Frame

Door Core:

- Type of Material: Magnesium Oxide Boards (MgO)
- Density: $\pm 1029 \text{ kg/m}^3$
- Thickness: 19mm mm
- Others: The core was infilled in the void areas within the door framework

Framework:

- Type of Material: Selangan Batu - finger jointed and laminated
- Density: $\pm 887 \text{ kg/m}^3$
- Thickness: 60mm mm
- Others: The timber frame is erect and joined using hex screw and nail gun then fixed to a brick wall using cement sand mortar. Any gaps and voids between the frame and brickwall were filled with mortar.

Ironmongeries / Hardwares:

- Brand of Door Closer: EQQO
- Brand of Mortise Lockset (Lockcase / Cylinder / Lever): EQQO
- Brand of Hinges: EQQO
- Brand of Eye Viewer: NIL

Vision Panel Size: 157mm(w) x 306mm(h) x 7mm(t)

Tahap Rintangan Api

:Integriti: 65 min

Insulasi: 65 min

Nama & Alamat Pengeluar

:SUPERWOOD INDUSTRIES SDN BHD

No. Laporan Ujian/Tarikh

:FRIM FPL 2022032186 08/08/2022

Jenis Skim Pensijilan Barangan

:FRIM Product Certification (FRIM)

No. Skim Pensijilan Barangan

:FRIM PCS F524-10/8

Tempoh Sah Laku

:03/10/2025

Ulasan Pegawai Proses

:PRA 1 JAM (SEDIA ADA)

Ulasan Mesyuarat

:

Muka Surat 1 / 5



Had Kegunaan

**RESEPSI KONSEP HENDAK DILAMPAIRAN UJIAN DAN UBBL
1984 SERTA PERLU MEMATUHI SYARAT-SYARAT TAMBAHAN
SEPERTI DI LAMPIRAN A2 & A3.**

Tempoh sah perakuan: 06/06/2025 hingga 05/06/2027

SAMPLE

Muka Surat 2 / 5



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my



SUPERWOOD INDUSTRIES SDN BHD
YOUR TRUSTED FIRE RATED DOOR



**FIRE RESISTANT
DOORSET SYSTEM**

APPROVED BY



BOMBA



SIRIM



2 HOUR RATING



GAYADOR 2-hour fire resistant doorset system is constructed from solid core design, fabricated from high performance fire resistant board and edged with metal capping. Overall thickness is 48mm.

The fire rated door frame is 65mm x 140mm x 1.5mm EG (T)

GAYADOR is tested and approved to the current Malaysian Standard of MS 1073, Part 3: 1996.

GAYADOR offers style, integrity and insulation features with total commitment for the contemporary construction sector.

APPROVED BY



BOMBA



SIRIM



+60 88 495 000




superwoodsales@gmail.com



superwood.com.my

DETAILS OF DOORSET - 2 HOUR RATING

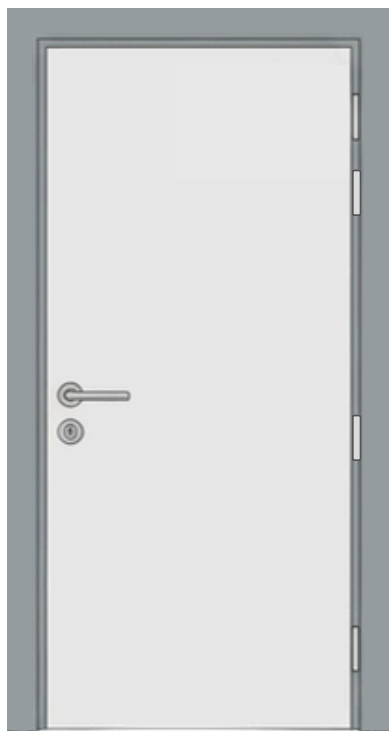


DOOR FRAME SIZE - SINGLE LEAF
(maximum size 1200mm X 2400mm)




DOOR FRAME SIZE - DOUBLE LEAF
(maximum size 2400mm X 2400mm)

CROSS SECTION OF DOOR LEAF

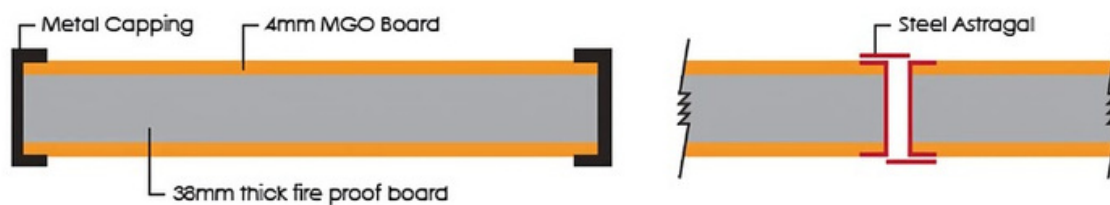


Thickness of Door Leaf ± 48 mm

DETAILS OF DOOR METAL FRAME



Single Rebate



Double Rebate





GD1100

MORTISE ENTRANCE LOCK



DESCRIPTION :

- With latch bolt and square bolt
- Latch bolt is operated by both lever and cylinder
- Square bolt is operated by cylinder
- Internal lever can retract both latch bolt and square bolt for emergency escape.

SPECIFICATION :

Finishing	Stainless Steel
Backset	A 60 mm B 85 mm
Dimension	A 60 mm B 85 mm C 240 mm D 87 mm
Standard	EN 12209 : 2003

PRODUCT INCLUDED :

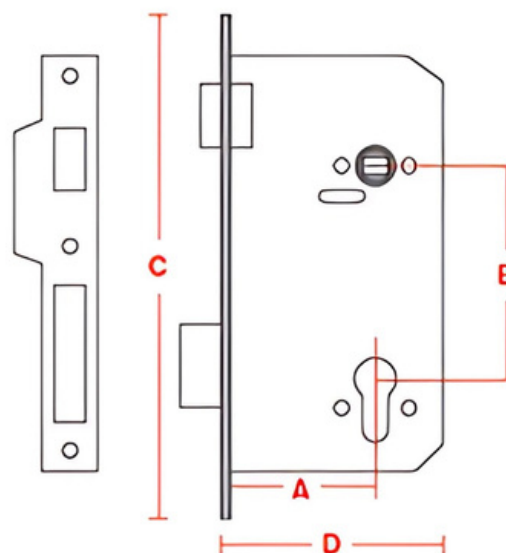

GayaDor

APPROVED BY



BOMBA SIRIM



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my




GD4100

AUTO FLUSH BOLT

SPECIFICATION :

Material	Stainless Steel SUS304
Finishing	Stainless Steel
Dimension	A 15 mm B 31 mm C 159 mm D 16.5 mm E 2 mm F 41 mm G Ø18 mm
Standard	EN 12051

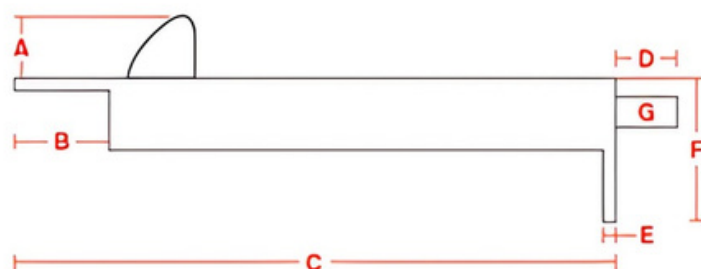

GayaDor

APPROVED BY



BOMBA

SIRIM




+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

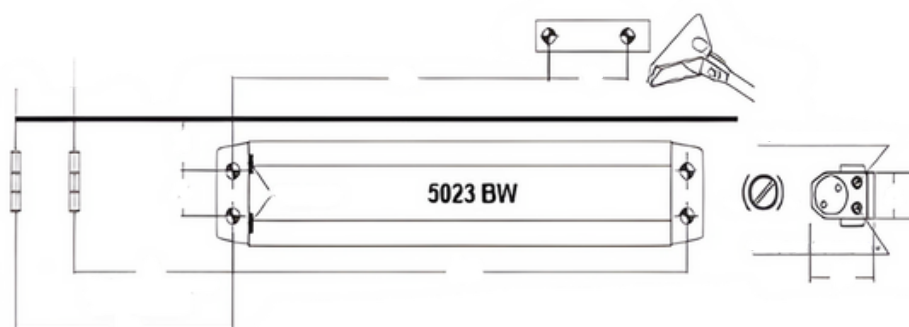

5023 BW

DOOR CLOSER

SPECIFICATION :

Material		Aluminium
Backcheck Function		Yes
Max. Open Angle		180°
Spring Strength Adjustable		
Closing Speed Adjustment	Speed 1	180° - 15°
	Speed 2	15° - 0°
Applicable Temperature		30 - 40
Dimension of Main Body (mm)		L180 X W44.5 X H67
Standard		EN 1154 : 1997

GayaDor

APPROVED BY



BOMBA SIRIM



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my




GAYA SUS 304

DOOR HINGE

SPECIFICATION :

Material	Stainless Steel SUS304
Finishing	Stainless Steel
Size	5"
Thick	2.5 mm
Dimension	A 125 mm B 91 mm
Standard	EN 1935 : 2002

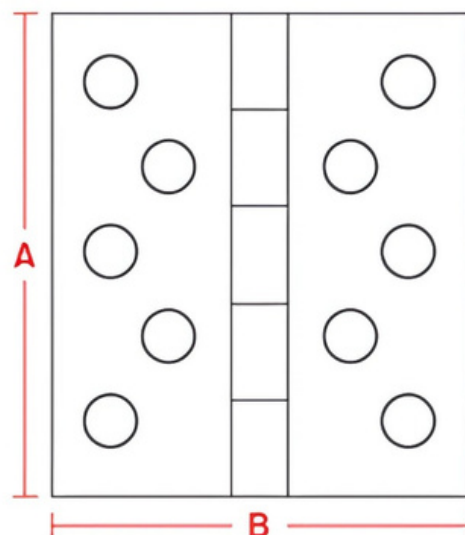

GayaDor

APPROVED BY



BOMBA

SIRIM



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my




GD2100

DOOR COORDINATOR

SPECIFICATION :

Material	Stainless Steel SUS304
Finishing	Stainless Steel
Dimension	A 278 mm B 88 mm
Standard	EN 1158 : 1997

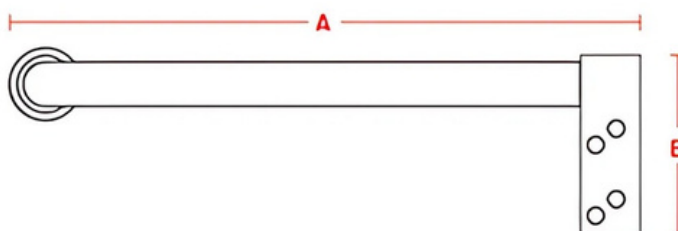

GayaDor

APPROVED BY



BOMBA

SIRIM




+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

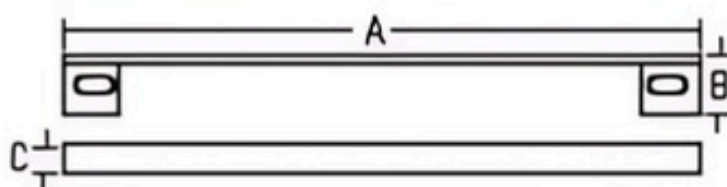

LOCK CASE REBATED KIT

SPECIFICATION :

Material	Stainless Steel SUS304
Finishing	Stainless Steel

GayaDor

APPROVED BY



BOMBA



SIRIM



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

CERTIFICATIONS

No Perakuan : JBPM/IP/RNP:700-7/2/3-450 (27)
(PERMOHONAN BAHARU)



Jabatan Bomba dan Penyelamat Malaysia

SIJIL PEPASANGAN KESELAMATAN KEBAKARAN

Pintu Api / Fire Door

MS 1073: Part 3 Method for Determination of the Fire Resistance (Type of Doorsets)

Dengan ini diperakui

GAYA MURNI SDN BHD
(GD/FR/SL (M) 60-C)

Beroperasi di

PT 11133, JALAN MU 1/6, TAMAN PERINDUSTRIAN MERANTI UTAMA
47120 PUCHONG, SELANGOR

TELAH BERDAFTAR

TEMPOH SAH PERAKUAN : 28/06/2024 HINGGA 27/06/2026



Lt

Ketua Pengarah
Jabatan Bomba dan Penyelamat Malaysia

****Peringatan:**

Sila patuhi sepenuhnya syarat-syarat dan had kegunaan seperti dalam Lampiran A1

(Sijil ini adalah cetakan berkomputer dan tidak memerlukan tandatangan)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

LAMPIRAN A1

No. Fail: JBPM/IP/RNP:700-7/2/3-450 (27)

No. Siri: PRA/SL/1610/2011 (P12)

Jenis Alat Kelengkapan : PINTU API / FIRE DOOR
 Jenama & Spesifikasi : Brand: GAYADOR
 Model: GD/FR/SL (M) 60-C
 Type: SINGLE LEAF METAL FRAME
 Tahap Ketahanan Api: 1 JAM
 Door Leaf: SINGLE LEAF
 Door Frame: METAL FRAME
 Type of Frame: E.G
 Door Core:
 • Type of Material: MGO BOARD
 • Density: 974 kg/m³
 • Thickness: 44.3 mm
 • Others:

Framework:
 • Type of Material: E.G
 • Density: kg/m³
 • Thickness: 1.2 mm
 • Others:

Ironmongeries / Hardware:

- Brand of Door Closer:
- Brand of Mortise Lockset (Lockcase / Cylinder / Lever):
- Brand of Hinges:
- Brand of Eye Viewer:

Vision Panel Size:

Tahap Rintangan Api : Integriti: 90 min
 Insulasi: 90 min

Nama & : GAYADOR SDN BHD

Alamat

Pengeluar

No. : 2010FE0482,2012FE0159,2012FE0160,2012FE0129,2012FE0405,2013FE0376,2017FE0148,20

Laporan 23/11/2016

Ujian/Tarikh

Jenis Skim : SIRIM Product Certification (SIRIM QAS)

Pensijilan

Barangan

No. Skim : PG020415

Pensijilan

Barangan

Tempoh : 08/07/2025

Sah Laku



Ulasan :
Pegawai
Proses

Had : PEMASANGAN HENDAKLAH MEMATUHI SPESIFIKASI SEPERTIMANA DALAM LAPORAN
Kegunaan 1984 SERTA PERLU MEMATUHI SYARAT-SYARAT TAMBAHAN SEPerti DI LAMPIRAN A2

Tempoh sah perakuan: 28/06/2024 hingga 27/06/2026

SAMPLE

Muka Surat 2 / 5



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

No Perakuan : JBPM/IP/RNP:700-7/2/3-491 (21)
(SEDIA ADA)



Jabatan Bomba dan Penyelamat Malaysia
SIJIL PEPASANGAN KESELAMATAN KEBAKARAN


Pintu Api / Fire Door

MS 1073: Part 3 Method for Determination of the Fire Resistance (Type of Doorsets)

Dengan ini diperakui
GAYA MURNI SDN BHD
(GD/MF/TWO/SL)

Beroperasi di
PT 11133, JALAN MU 1/6, TAMAN PERINDUSTRIAN MERANTI UTAMA,
47120 ,

TELAH BERDAFTAR
TEMPOH SAH PERAKUAN : 14/08/2024 HINGGA 13/08/2026

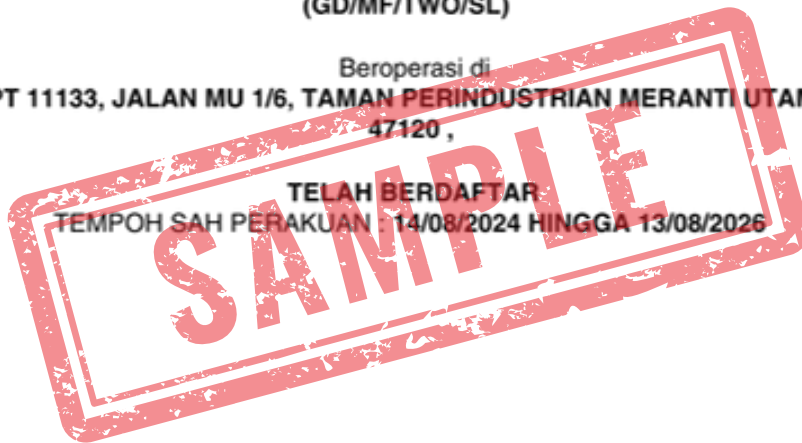

t.t

.....
Ketua Pengarah
Jabatan Bomba dan Penyelamat Malaysia

****Peringatan:**

Sila patuhi sepenuhnya syarat-syarat dan had kegunaan seperti dalam Lampiran A1

(Sijil ini adalah cetakan berkomputer dan tidak memerlukan tandatangan)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

LAMPIRAN A1

No. Fail: JBPM/IP/RNP:700-7/2/3-491 (21)

No. Siri: PRA/SL/1867/2014 (P12)

Jenis Alat Kelengkapan	:PINTU API / FIRE DOOR
Jenama & Spesifikasi	:Brand: GAYADOR Model: GD/MF/TWO/SL Type: SINGLE LEAF METAL FRAME Tahap Ketahanan Api: 2 JAM Door Leaf: SINGLE LEAF Door Frame: METAL FRAME Type of Frame: E.G Door Core: <ul style="list-style-type: none"> • Type of Material: MGO BOARD • Density: kg/m3 • Thickness: 47.1MM mm • Others:
	Framework: <ul style="list-style-type: none"> • Type of Material: E.G • Density: kg/m3 • Thickness: 1.2MM mm • Others:
	Ironmongeries / Hardware: <ul style="list-style-type: none"> • Brand of Door Closer: • Brand of Mortise Lockset (Lockcase / Cylinder / Lever): • Brand of Hinges: • Brand of Eye Viewer:
	Vision Panel Size:
Tahap Rintangan Api	:Integriti: 130 min Insulasi: 101 min
Nama & Alamat Pengeluar	:GAYADOR SDN BHD
No. Laporan Ujian/Tarikh	:2016FE0586 02/12/2016, 2017FE0666 19/12/2017, 2017FE0710 08/01/2017, 2019FE0532 10/09/2019, 2020FE0239 19/06/2020, 2021FE0131 31/03/2021
Jenis Skim Pensijilan Barangan	:SIRIM Product Certification (SIRIM QAS)
No. Skim Pensijilan Barangan	:PG020411
Tempoh Sah Laku	:24/06/2025
Ulasan Pegawai Proses	:PRA 2 JAM (sedia ada)
Ulasan Mesyuarat	:
Had Kegunaan	:PENSAHABAT HENDAKLAH MEMATUHI SEPERTIMANA DALAM LAPORAN UJIAN DAN UBBL 1984 SERTA PERLU MEMATUHI SYARAT-SYARAT TAMBAHAN SEPERTI DI LAMPIRAN A2 & A3.



No Perakuan : JBPM/IP/RNP:700-7/2/3-567 (18)
(SEDIA ADA)



Jabatan Bomba dan Penyelamat Malaysia
SIJIL PEPASANGAN KESELAMATAN KEBAKARAN


Pintu Api / Fire Door

MS 1073: Part 3 Method for Determination of the Fire Resistance (Type of Doorsets)

Dengan ini diperakui
GAYAMURNISDN BHD
(GD/MF/TWO/DL)

Beroperasi di
PT 11133, JALAN MU 1/6, TAMAN PERINDUSTRIAN MERANTI UTAMA,
47120 PUCHONG, SELANGOR

TELAH BERDAFTAR
TEMPOH SAH PERAKUAN : 15/08/2025 HINGGA 14/08/2027

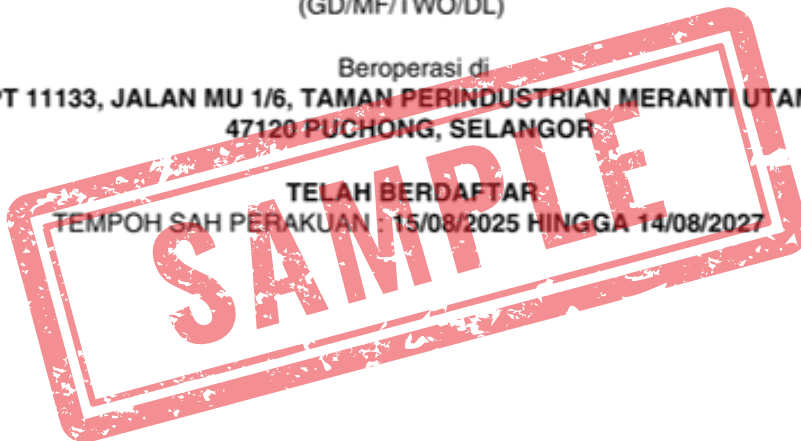

t.t

.....
Ketua Pengarah
Jabatan Bomba dan Penyelamat Malaysia

****Peringatan:**

Sila patuhi sepenuhnya syarat-syarat dan had kegunaan seperti dalam Lampiran A1

(Sijil ini adalah cetakan berkomputer dan tidak memerlukan tandatangan)



+60 88 495 000



superwoodsales@gmail.com



superwood.com.my

LAMPIRAN A1

No. Fail: JBPM/IP/RNP:700-7/2/3-567 (18)

No. Siri: BB/DL/2162/2016 (P7)

Jenis Alat Kelengkapan	:PINTU API / FIRE DOOR
Jenama & Spesifikasi	:Brand: COMPOSITE FIRE RESISTANT DOORSET DOUBLE LEAF Model: GD/MF/TWO/DL Type: DOUBLE LEAF METAL FRAME Tahap Ketahanan Api: 2 JAM Door Leaf: DOUBLE LEAF Door Frame: METAL FRAME Type of Frame: E.G STEEL Door Core: <ul style="list-style-type: none"> • Type of Material: MGO BOARD • Density: 101.8 kg/m³ • Thickness: 47.3 mm • Others: GLASS/VISION PANEL CAPPING
	Framework: <ul style="list-style-type: none"> • Type of Material: E.G STEEL • Density: 129.8 kg/m³ • Thickness: 1.2MM mm • Others: SINGLE REBATE
	Ironmongeries / Hardware: <ul style="list-style-type: none"> • Brand of Door Closer: GAYA/DORTEZ/KOBE/KEYLINE/ECO/ST.GUCHI • Brand of Mortise Lockset (Lockcase / Cylinder / Lever): GAYA/DORTEZ/KOBE/KEYLINE/ECO/ST.GUCHI • Brand of Hinges: GAYA/DORTEZ/KOBE/KEYLINE/ECO/ST.GUCHI • Brand of Eye Viewer: GAYA/DORTEZ/KOBE/KEYLINE/ECO/ST.GUCHI
	Vision Panel Size: 190MMX350MM
Tahap Rintangan Api	:Integriti: 130 min Insulasi: 81 min
Nama & Alamat Pengeluar	:GAYADOR SDN BHD
No. Laporan Ujian/Tarikh	:2014FE0453 10/11/2014, 2016FE0169 11/04/2016, 2017FE0456 13/09/2017, 2017FE0640 22/11/2017, 2018FE0077 15/02/2018, 2020FE0236 19/06/2020
Jenis Skim Pensijilan Barangan	:SIRIM Product Certification (SIRIM QAS)
No. Skim Pensijilan Barangan	:PG020416
Tempoh Sah Laku	:23/09/2026
Ulasan Pegawai Proses	:PRA 2 JAM (SEDIA ADA)
Ulasan Mesyuarat	:

Muka Surat 1 / 5





CONTACT *Us*



+60 12 418 6008



superwood.com.my



+60 88 495 000



superwoodsales@gmail.com



Lot 1, Lorong Bizhub 1, Bandar Sierra 1, 88450, Kota Kinabalu,
Sabah, Malaysia.

