

CONCRETE TRAILER PUMP S30


pilecom
EQUIPMENT



SPECIFICATIONS

- + **125mm hard chromed concrete cylinders with 915mm stroke**
S Valve 125-100mm - 100mm, swing transfer valve in hopper with 100mm outlet
- + **Max pumping Height: 75m**
Max pumping distance: 200m
- + **Flow rate up to 30 m³/h**
- + **Max aggregate size 25 mm**
- + **Pumping pressure 70 bar**
- + **Hopper capacity 120 liters**
 - 4 Cylinder Deutz Engine 55KW @ 2200rpm
 - 2 Hydraulic rear stabilizers
 - Spotlight on hopper
 - Control panel with electromechanical devices
 - 4-Function wire remote control
 - On request road-towable unit complete with parking brake and lights
 - Compact and easy to move
 - Dimensions: w/l/h: 1570/3947/1885 mm
 - Weight: 2100 kg


CONCRETE TRAILER PUMP S30

ACCESSORIES ON DEMAND


STOWABLE CE KIT

CONCRETE PUMPING KIT ON REQUEST

- Steel pipes 4" or 3"
- Rubber hose 4" or 3"
- Steel 90° bend 4" or 3"
- Steel bend 4" to 3" reducer
- Coupling 4" + 3"
- Basket for cleaning ball recovery 4" or 3"

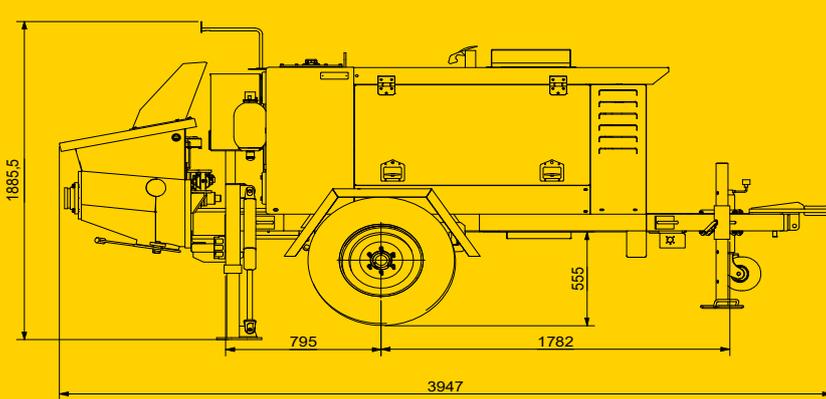

SIDE VIEW

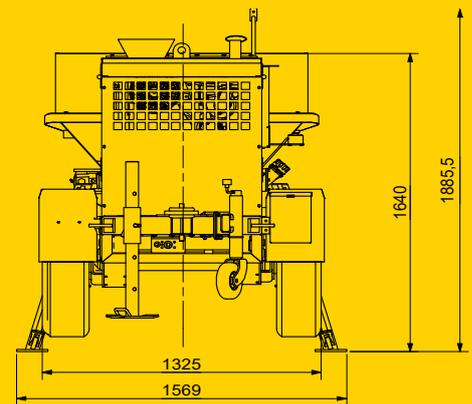

FRONT VIEW



pilecom
EQUIPMENT

pilecomequipment.com.au