

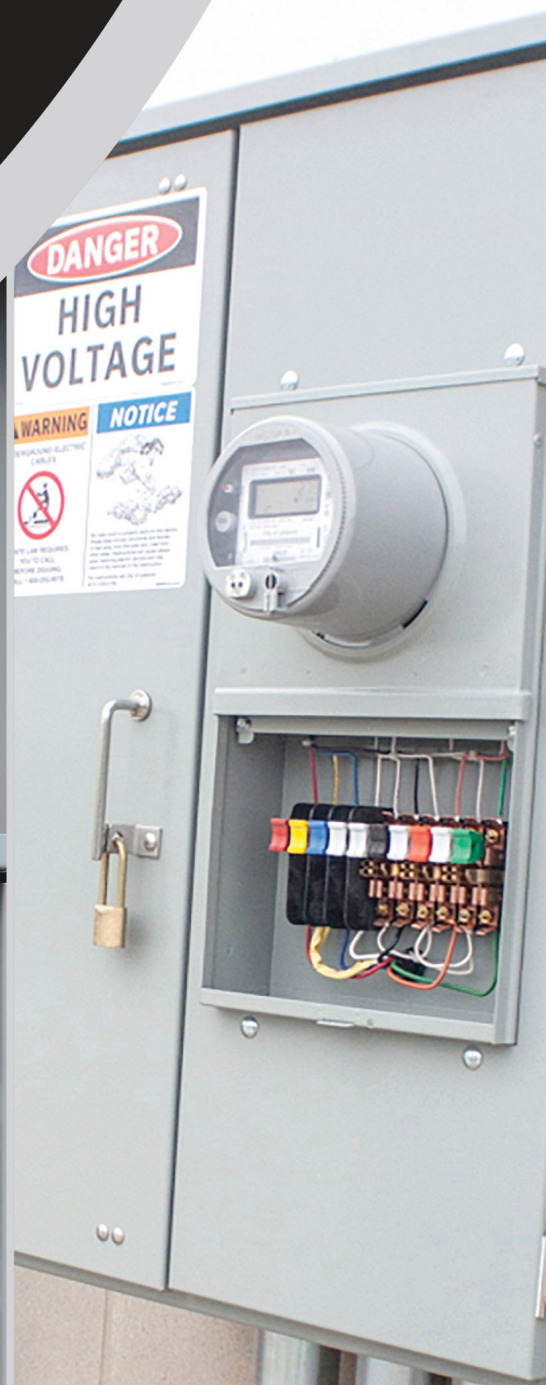


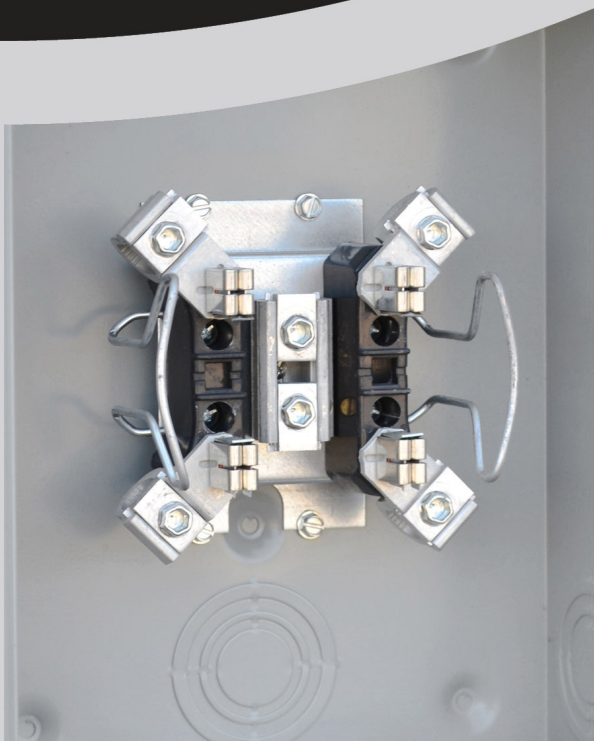

QUALITY, VERSATILITY, LONGEVITY



Manufacturer of Quality Electrical Products | Since 1959

The Durham Company | P.O.Box 908, Lebanon, MO 65536 | 417.532.7121 | www.DurhamUSA.com

Excellence in Quality Electrical Products Since 1959

1959



Durham is Founded

Roy Durham decides to branch out, using tooling acquired from the Binkley utility division, and organizes The Durham Company in Washington, MO.



Durham Relocates

Durham relocates to Lebanon, MO, which is Durham's current headquarters.

1963

1969

Early Growth

A new plant is built at our current location in response to growing demand of products like the first mechanical pole-top switch and various socket-transfer switch combination units.



1961

George E. Carr

Acquires The Durham Company from the Durham family.



1986



Partnership with Education

Consultants with the University of Missouri provided training for the pilot program focused on better identifying and solving problems.

This mentality is part of the culture that helps us maintain our competitiveness today.

1999



Strong Growth Continues

An additional 40,000 sq. ft. is added to the Lebanon facility to support The Durham Company's increasing customer and product base.

1994



Expansion in Houston, MO

Durham opens a 30,000 sq. ft. facility in Houston, MO for the Pad Mount Division to facilitate growth and provide focus to the rapidly expanding group.

1995

Test Switch Product is Acquired

A major acquisition of the Test Switch Technologies, a remnant of Superior Technologies. This adds additional breadth to the Durham Company's Utility product mix. The manufacture of the new line is moved from Canton, Ohio and integrated into Lebanon, MO headquarters in 1997.



1993

Astra Transformer's Asset Purchase

A new affiliate is born, GEC Durham Industries acquires Astra which adds Instrument Rated voltage and current transformers to our growing metering product lineup.



2000

Durham gets LEAN

The Durham leadership team takes to action to undertake the implementation of the LEAN process of manufacturing pioneered by the Toyota Corporation. The effects of this never-ending effort are realized today by our customers by way of improved quality, faster response times, and competitive prices.



Catalog Printed - 7 / 2026

Past... Present... Future... of The Durham Company.

2001



Demand for Durham's Pad Mount Equipment

In Houston, MO a 35,000 sq. ft. expansion is made to house production for the increased demand of the Durham's Pad Mount equipment.



New Product Offers More

Durham acquires Carr Industries, a local connector company. This addition improves our supply chain and adds more breadth to our product offerings.

2013

2021

New Facility in Buffalo, MO houses GEC Durham.

45,000 square foot facility was built to manufacture the GEC line of Transformer products. This growth not only produces more product but more jobs within our communities.



New Building in Houston, MO

In Houston, MO a 38,000 sq. ft. building is purchased to help the continued increase of the demand of Pad Mount products.

2010

2002

LEAN Continues to have Positive Impact

Test Switch production that originally required over 15,000 sq. ft. in the Lebanon facility, is economized into a 7,000 sq. ft. space through the LEAN efforts. The reduction in space allows for a stream-lined and more efficient production from the start to finish. This efficiency increase also allows Instrument Rated Meter Sockets to be built in the same assembly line increasing efficiency throughout the value stream.



2012

A New Affiliate, A New Industry

The assets of L&W Industries are acquired and a new version of the company is launched, solely focused on the Railroad Market. Knowledge sharing between the organizations helps both companies.



2016


Over 50,000 sq. ft. Added at Durham Facilities

Both Lebanon and Houston increased facility sized to keep up with demand growth. Multiple high-tech fabrication cells were added as well.

Durham's New Addition at Houston, MO



Durham's New Addition at Lebanon, MO - Durham's Headquarters

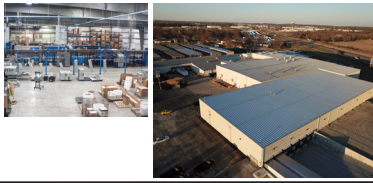

Today & Beyond

Tomorrow may be a new day, but our journey to be your best supplier continues.



Delivering **Reliable Solutions** To The **Electrical Industry**
Through **Innovative Engineering, Design And Manufacturing**
For A **World Class Customer Experience**



Durham Catalog July 2026

722 Durham Road | Lebanon, MO 65536 | 417.532.7121 | www.DurhamUSA.com

Table of Contents

Meter Sockets-Single Position

125 Amp, 4 & 5 Jaw, Ring & Ringless	8
200 Amp, 4 & 5 Jaw, Ring & Ringless	9
200 Amp, 4 & 5 Jaw, Offset Bused, Ringless	10
200 Amp, 4 & 5 Jaw, Lever Bypass, Jaw Clamping, Ringless	11
200 Amp, 7 Jaw, Lever Bypass, Jaw Clamping, Ringless	12
200 Amp 4, 5, & 7 Jaw, Lever Bypass, Spring Jaw, Ringless	13
200 Amp, 4, 5 & 7 Jaw, Offset Bused, Lever Bypass, Jaw Clamping, Ringless	14
320 Amp, 4 Jaw, Lever Bypass, Jaw Clamping, Ringless	15
320 Amp, 5 & 7 Jaw, Lever Bypass, Jaw Clamping, Ringless	16
320 Amp, 4 Jaw, Offset Bused, Lever Bypass, Jaw Clamping, Ringless	17
320 Amp, 5 & 7 Jaw, Offset Bused, Lever Bypass, Jaw Clamping, Ringless	18

Meter Sockets-Multi Position

100 Amp, 4 Jaw, 2, 3, 4, 5 & 6 Multi Position, Ringless	19
125 & 200 Amp, End Feed, 4 Jaw, 2, 3, 4, 5 & 6 Multi Position, Ringless	20
200 Amp, 4 Jaw, 2, 3, 4, 5 & 6 Multi Position, Ringless	21
200 Amp, 4, 5 & 7 Jaw, 2, 3, 4, 5 & 6, Multi Position, Lever Bypass, Jaw Clamping, Ringless	22

Socket Breaker Combinations - NEC 2023 & UL67 Compliant

100 Amp, 4 Jaw, Ring & Ringless	23
150 & 200 Amp, 4 Jaw, Ring & Ringless	24
200 Amp, With Wire Way, 4 Jaw, Ringless	25, 26
320 Amp, 4 Jaw, Lever Bypass, Jaw Clamping, Ringless	27

Socket Breaker Combinations - Multi Position

100 Amp, 4 Jaw, 2, 3, 4, 5 & 6 Multi Position, Ringless	28
200 Amp, 4 Jaw, 2, 3, 4, 5 & 6 Multi Position, Ringless	29

Breaker Enclosures

50, 70 & 100 Amp, Hydraulic, 125 Through 225 Amp	30
150 & 200 Amp, Provisions For Extra 2 Pole Breakers	31

Meter Sockets-Transformer Rated

20 Amp, 5 & 6 Jaw, Ring & Ringless, Auto Circuit Closing, Lever Bypass	32, 33
20 Amp, 5, 6 & 8 Jaw, Ring & Ringless, Provisions For Test Switch	34
20 Amp, 13 Jaw, Ring & Ringless, Provisions For Test Switch	35
20 Amp, 5, 6, 7, 8, 13, 15 Jaw, Pre-Wired With Test Switch, Ring & Ringless	36
Opti-Form Enclosure -	37
Opti-Form Panel - with Pre-wired Options	38
20 Amp, The Isolator, With & Without VT's	39
20 Amp, A-Base Enclosures	40

Transockets-Transformer Rated

200-1600 Amp, Single & Three Phase Transockets	41
600 Amp, Single & Three Phase, High Accuracy Transockets	42
400 Amp, 5 Jaw, Single Phase Transockets	43
400 Amp, 6, 7, 8 & 13 Jaw, Single & Three Phase Transockets	44
1200 Amp, Pad Mount Transocket	45
Transocket Ordering Guide	46

Table of Contents (Continued)

Test Switches

Test Switches & Accessories.....	47, 48
Pre-Wired Socket/Test Switch Selector.....	49

Current Transformer Enclosures

Single Right Hand Hinged Door, RD Series	50
Single Lift Off Door, SF Series	51
Double Doors, DD Series	52
200, 400, 600 & 800 Ampere CT Cabinet With Mounting Rack	53

Breaker Generator Transfer Switches W/O Metering Provisions

100 & 200 Amp, 4 Jaw	54
----------------------------	----

Breaker Generator Transfer Switches With Metering Provision

100 Amp, 4 Jaw, Ringless	55
200 Amp, 4 Jaw, Ringless	56
200 Amp, 4 Jaw, Wide, Ringless	57
320 Amp, 4 Jaw, Lever Bypass, Jaw Clamping, Ringless.....	58

Line & Load Side Switches With Metering Provisions

200 Amp, 480 Volt, 7 Jaw, Self Contained, Ringless	59
--	----

Load Management Enclosures

170 Amp, 277 Volt, 7 & 13 Jaw Contactor Switches W/Without Metering	60
---	----

Generator Transfer Switches With Metering Provisions

100 & 200 Amp, 4 Jaws, Self Contained, Ringless.....	61
200 & 320 Amp, 4 Jaws, Self Contained, Ringless.....	62
400 & 600 Amp, 5 Jaws, Transformer Rated, Ringless	63
100, 200, 400 & 600 Amp, 7 & 13 Jaws, Self Contained, Lever Bypass & Transformer Rated.....	64
100, 200, 320, 400 & 600 Amp, 4 & 5 Jaws, Self Contained & Transformer Rated.....	65
200, 400 & 600 Amp, 7 & 13 Jaws, Self Contained, Lever Bypass & Transformer Rated	66

Generator Transfer Switches Without Metering Provisions

100 & 200 Amp, 2S, Self Contained	67
400, 600 & 800 Amp, Single Phase, Self Contained.....	68
100, 200, 400 & 600 Amp, 3 Phase, Self Contained	69

Pad Mount Generator Transfer Switches With Metering Provisions

200, 320, 400, 600 & 800 Amp, 4, 5 & 6 Jaws, Self Contained, Transformer Rated	70
200 Amp, 4, 5, & 6 Jaws, Self Contained & Transformer Rated	71
200, 400 & 600 Amp, 7 & 13 Jaws, Self Contained & Transformer Rated.....	72

Meter Pedestals

100, 200 & 320 Amp, 1, 2 & 3 Positions, Single Phase	73
320 Amp, 1 Position, Single Phase.....	74

Table of Contents (Continued)

Meter Pedestals-Socket Breaker Combos

200 Amp, 4 Jaws, 1, & 2 Positions, Single Phase75

200 Amp, 4, 5 & 7 Jaws, 1 Position, Lever Bypass.....76

320 & 400 Amp, 4 & 5 Jaws, Self Contained & Transformer Rated.....77

20 Amp, 5, 6, 7, 8 & 13 Jaws, Transformer Rated78

Secondary Connection Cabinets

100 & 200 Amp, Pole or Wall Mount79

Single & Three Phase Secondary Pedestals80

CE Series, 1000, 2000, 3000, 4000 & 5000 Amp, Pad Mount, High Amperage Termination Cabinets81

4000 Amp, Pad Mount, Termination Cabinet82

Pad Mount Primary Sectionalizing Enclosures

AM Series, 200 & 600 Amp, 15, 25 & 35 KV, Single & Three Phase.....83, 84, 85

AMX Series, 200 Amp, 15/25KV, Single & Three Phase86

Pad Mount Primary Fused Sectionalizing Enclosures

AF Series, 200, 600 Amp, 15, 25, 35 KV, Single & Three Single Phase87, 88

Pad Mount Equipment Enclosures

ATP Series, Penta Head Bolt Lockable Doors, No Dead Front89

ATBP Series Penta Head Bolt Lockable Doors, Insulating Barriers, No Dead Front.....90

ATBPR Series, Radial Feed Load Break Dead Front Door, Penta Head bolt Lockable Doors.....91

Pad Mount Primary Metering Enclosures

APMP Series, 15, 25 & 35KV, 200 & 600 Amp, Three Phase.....92

APMP Series, 15, 25 & 35KV, 200 & 600 Amp, Single Phase.....93

APX Series, Dead Front, 15/25KV, 200 & 600 Amp, Three Phase, Flip Top Roof.....94, 95

APX Series, Live Front, 15KV, Three Phase, Flip top Roof96

Primary Metering Ordering Guide97

ATLAS Pole Top Racks

ATLAS Pole Top Primary Metering Mounts.....98, 99, 100, 101, 102

Accessories

Meter Socket Option Prefix Code Letters & Accessories.....103

Meter Socket Accessories (Blocks, Caps & Neutral Assemblies).....104

Socket Hub Kits105

Breaker Kits & Accessories106

C-Line Connectors

Conductor Lugs - C-Line Series, Dual & Stacked Lugs, UB-Connectors, Pole Type-Connectors..... 107, 108, 109, 110, 111, 112

Pad Mount Transformer Extension Bars & Lug Kits..... 113

Our Commitment

***Delivering Reliable Solutions To The Electrical Industry
Through Innovative Engineering, Design And Manufacturing
For A World Class Customer Experience***

Quality Responsibility

Our Employees are responsible for performing to documented operating and quality procedures. The employee has the authority to halt and correct operations found to be producing nonconforming products. As the product passes through the various processes, each individual assumes their quality responsibility and assures that the requirements of the customer are being met.

Employee Training

The Durham Management Team believes training is essential for quality employees. Our employee training consists of the Durham quality philosophy, the understanding and application quality techniques, methods and procedures. Additional employee training consists of "LEAN Manufacturing."

ISO-9001 Quality Standard

In keeping with our philosophy of continuous improvement, The Durham Company has chosen the ISO-9001 Quality System Standard, as an effective blueprint for a solid quality management system. This standard provides guidance in all areas for understanding our customer's requirements, both internal and external.

The Durham Company is using compliance to the ISO-9001 standard as the guide for our operations with the net result of consistency in operations, products, and services in order to maintain our current reputation and establish leadership and growth in the electrical industry.



125 Amp | Meter Sockets - Ring Or Ringless Style


4 Jaw | 600 VAC






UHT-RS101B



T-RS101B

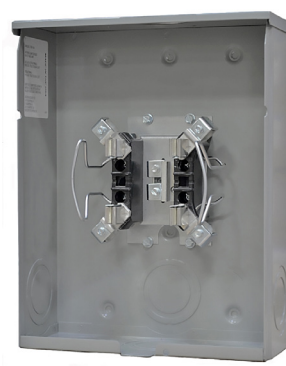

T-RS111B

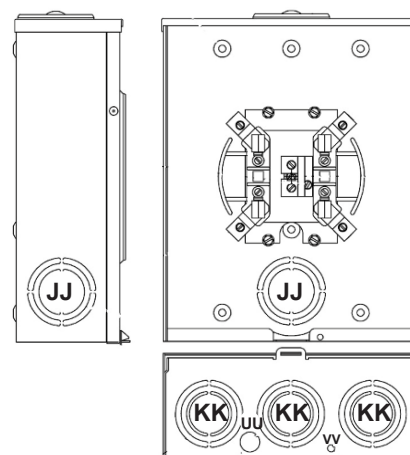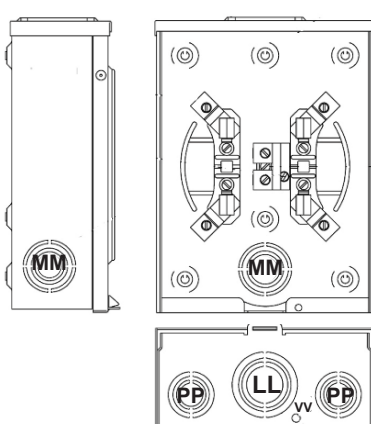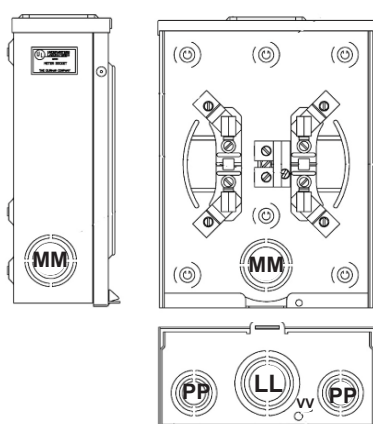

Catalog Number		Amps	Service	Hub	# Jaws	Wire Size CU-AL	Bypass	Dimensions		
Ringless	Ring Style							H"	W"	D"
UHT-RS101B	-	125	OH/UG	HO	4	#8-2/0	Horn	10-7/8	8	3-1/2
T-RS101A	RT-RS101A	125	UG	Solid	4	#8-2/0	None	10-7/8	8	3-1/2
T-RS101B	RT-RS101B	125	OH/UG	HO	4	#8-2/0	None	10-7/8	8	3-1/2
T-RS101C	RT-RS101C	125	OH/UG	HCP	4	#8-2/0	None	10-7/8	8	3-1/2
T-RS101L	RT-RS101L	125	OH/UG	1-1/4" Hub	4	#8-2/0	None	10-7/8	8	3-1/2
T-RS101M	RT-RS101M	125	OH/UG	1-1/2" Hub	4	#8-2/0	None	10-7/8	8	3-1/2
T-RS111B	RT-RS111B	125	OH/UG	HO	4	#8-2/0	None	14	11	4-3/8
T-RS111C	RT-RS111C	125	OH/UG	HCP	4	#8-2/0	None	14	11	4-3/8
T-RS111L	RT-RS111L	125	OH/UG	1-1/4" Hub	4	#8-2/0	None	14	11	4-3/8
T-RS111N	RT-RS111N	125	OH/UG	2" Hub	4	#8-2/0	None	14	11	4-3/8

Hub / Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4"	L
1-1/2"	M
2"	N
2-1/2"	P

- Meter Socket short circuit current ratings are greater than 10,000 Amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- Add prefix G for factory installed, grounded 5th terminal.
- NEMA 3R Enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- Ring Style Sockets are supplied with snap-type sealing rings.
- Select optional Meter Socket Accessories on pages 94, 95, 96.

Concentric Knockout	
JJ	2-1/2, 2, 1-1/2
KK	2-1/2, 2
LL	2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

200 Ampere - Meter Sockets - Ring Or Ringless Style

4 Jaw | 600 VAC






T-RS203B



T-RS213C



T-RS213-8C

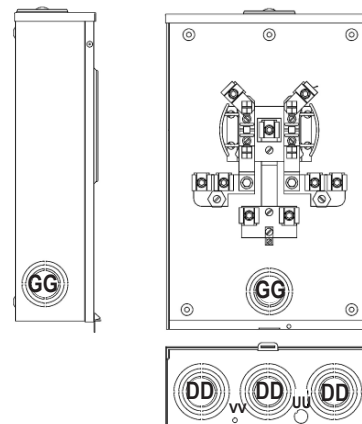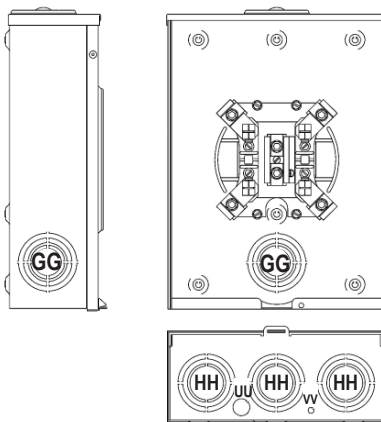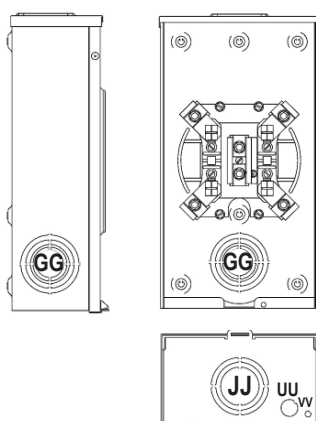

Catalog Number		Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
Ringless	Ring Style					Line	Load	H"	W"	D"
T-RS202B	RT-RS202B	200	OH	HO	4	#8-250	#8-250	14	8	4-3/8
T-RS202C	RT-RS202C	200	OH	HCP	4	#8-250	#8-250	14	8	4-3/8
T-RS203B	RT-RS203B	200	OH	HO	4	#8-350	#8-350	15	8	4-3/8
T-RS203N	RT-RS203N	200	OH	2" Hub	4	#8-350	#8-350	15	8	4-3/8
T-RS212B	RT-RS212B	200	OH/UG	HO	4	#8-250	#8-250	14	11	4-3/8
T-RS212C	RT-RS212C	200	OH/UG	HCP	4	#8-250	#8-250	14	11	4-3/8
T-RS212N	RT-RS212N	200	OH/UG	2" Hub	4	#8-250	#8-250	14	11	4-3/8
T-RS213A	RT-RS213A	200	OH/UG	Solid	4	#8-350	#8-350	15	11	4-3/8
T-RS213B	RT-RS213B	200	OH/UG	HO	4	#8-350	#8-350	15	11	4-3/8
T-RS213C	RT-RS213C	200	OH/UG	HCP	4	#8-350	#8-350	15	11	4-3/8
T-RS213N	RT-RS213N	200	OH/UG	2" Hub	4	#8-350	#8-350	15	11	4-3/8
*T-RS213-8C	-	200	OH/UG	HCP	4	#8-350	(2) #8-250	20	13	4-15/16

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4"	L
1-1/2"	M
2"	N
2-1/2"	P

- Meter Socket short circuit current ratings are greater than 10,000 Amperes when used in conjunction with certain types of over current protection. Contact factory for details. * Note T-RS213-8C does not meet the over 10K SCCR.
- Add prefix G for factory installed, grounded 5th terminal.
- NEMA 3R Enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- Ring Style Sockets are supplied with snap-type sealing rings.
- Select optional Meter Socket Accessories on pages 94, 95, 96.
- Ring Style Sockets are supplied with snap-type sealing rings. Add Prefix U for UL label. (Underwriter Laboratories) label available on most units.

Concentric Knockout	
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
HH	2-1/2, 2, 1-1/2, 1-1/4
JJ	2-1/2, 2, 1-1/2
UU	1/2
VV	5/16

Offset Based Meter Sockets - Ringless Style

200 Ampere | 4 Jaw - 600 VAC

OH/UG Service







T-RS233C

UG Service



T-RS223A

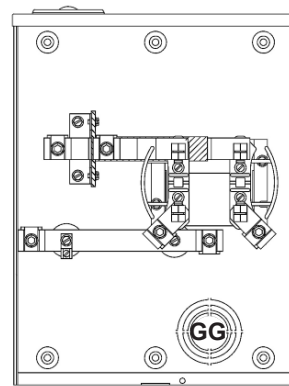

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-RS220A	200	UG	Solid	4	3/8" Stud	3/8" Stud	15-1/8	13	4-15/16
T-RS220-3A	200	UG	Solid	4	3/8" Stud	#8-350	15-1/8	13	4-15/16
T-RS222A	200	UG	Solid	4	#8-250	#8-250	13	13	4-15/16
T-RS222-0A	200	UG	Solid	4	#8-250	#8-250	15-1/8	13	4-15/16
T-RS223A	200	UG	Solid	4	#8-350	#8-350	13	13	4-15/16
T-RS223-0A	200	UG	Solid	4	#8-350	3/8" Stud	15-1/8	13	4-15/16
T-RS230B	200	OH/UG	HO	4	3/8" Stud	3/8" Stud	20	13	4-15/16
T-RS232B	200	OH/UG	HO	4	#8-250	#8-250	17-1/8	13	4-15/16
T-RS233C	200	OH/UG	HCP	4	#8-350	#8-350	17-1/8	13	4-15/16

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4"	L
1-1/2"	M
2"	N
2-1/2"	P

- Units rated 200 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction
- with certain types of over current protection. Contact factory for details.
- Add prefix G for factory installed, grounded 5th terminal.
- UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- NEMA 3R enclosures.
- For Meter Socket options see replacement parts & accessory pages.

Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

200 Ampere - Meter Sockets

4 & 5 Jaw | HQ Lever Bypass/Jaw Clamping | Ringless Style | 600 VAC






T-H4213C



T-H4203B



T-H5213B

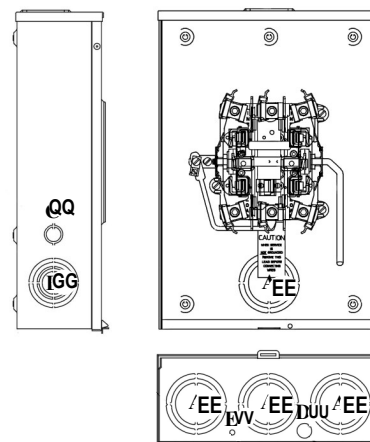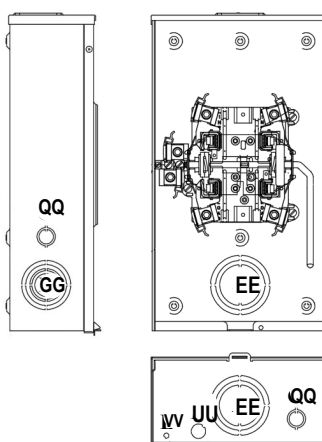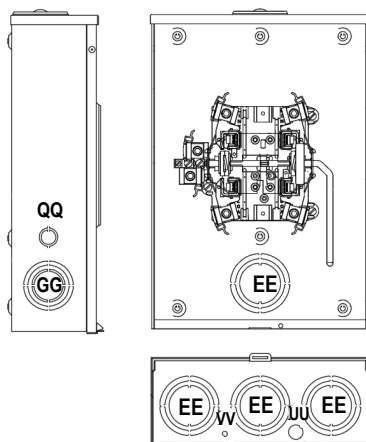

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H4203B	200	OH	HO	4	#6-350	#6-350	19	10-1/2	4-15/16
T-H4210C	200	OH	HCP	4	3/8" Studs	3/8" Studs	24-11/16	13	4-15/16
T-H4213A	200	UG	Solid	4	#6-350	#6-350	19	13	4-15/16
T-H4213B	200	OH/UG	HO	4	#6-350	#6-350	19	13	4-15/16
T-H4213C	200	OH/UG	HCP	4	#6-350	#6-350	19	13	4-15/16
T-H5203B	200	OH	HO	5	#6-350	#6-350	19	10-1/2	4-15/16
T-H5203C	200	OH	HCP	5	#6-350	#6-350	19	10-1/2	4-15/16
T-H5213C	200	OH/UG	HCP	5	#6-350	#6-350	19	13	4-15/16
T-H5213B	200	OH/UG	HO	5	#6-350	#6-350	19	13	4-15/16
T-H5213U	200	OH/UG	L HCP	5	#6-350	#6-350	19	13	4-15/16


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 200 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.

Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

200 Ampere - Lever Bypass Meter Sockets

7 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC

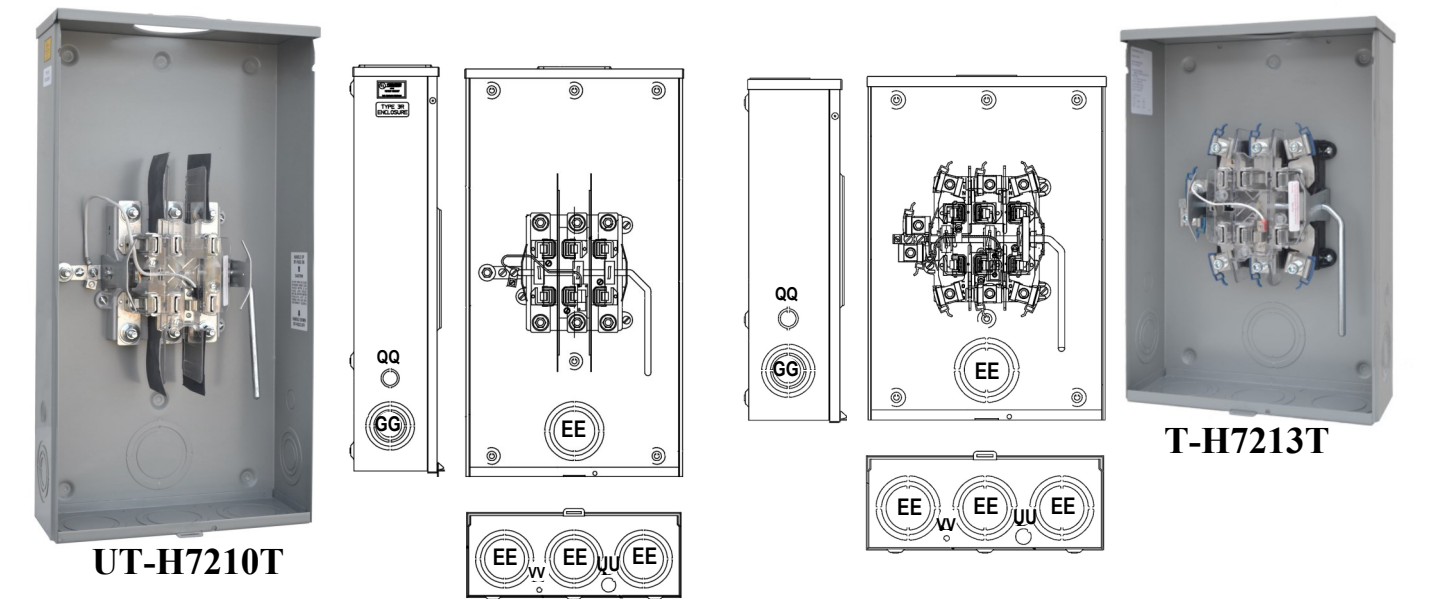

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H7203B	200	OH	HO	7	#6-350	#6-350	19	10-1/2	4-15/16
T-H7203N	200	OH	2" Hub	7	#6-350	#6-350	19	10-1/2	4-15/16
T-H7203T	200	OH	L HO	7	#6-350	#6-350	19	10-1/2	4-15/16
T-H7203U	200	OH	L HCP	7	#6-350	#6-350	19	10-1/2	4-15/16
UT-H7210B	200	OH/UG	HO	7	3/8" Stud	3/8" Stud	24-11/16	13	4-15/16
UT-H7210T	200	OH/UG	L HO	7	3/8" Stud	3/8" Stud	24-11/16	13	4-15/16
T-H7210U	200	OH/UG	L HCP	7	3/8" Stud	3/8" Stud	24-11/16	13	4-15/16
T-H7213A	200	UG	Solid	7	#6-350	#6-350	19	13	4-15/16
T-H7213B	200	OH/UG	HO	7	#6-350	#6-350	19	13	4-15/16
T-H7213C	200	OH/UG	HCP	7	#6-350	#6-350	19	13	4-15/16
T-H7213N	200	OH/UG	2" Hub	7	#6-350	#6-350	19	13	4-15/16
T-H7213T	200	OH/UG	L HO	7	#6-350	#6-350	19	13	4-15/16
T-H7213U	200	OH/UG	L HCP	7	#6-350	#6-350	19	13	4-15/16
*T-H7213V	200	OH/UG	2-1/2" Hub	7	#6-350	#6-350	19	13	4-15/16


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 200 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- NEMA 3R enclosures.
- *T-H7213V has a large hub opening with a hub reducer plate and 2-1/2" hub.
- For Meter Socket options see replacement parts & accessory pages.

Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

200 Ampere - Lever Bypass Meter Sockets

4, 5 & 7 Jaw | MQ Lever Bypass/Spring Jaw | Ringless Style | 600 VAC

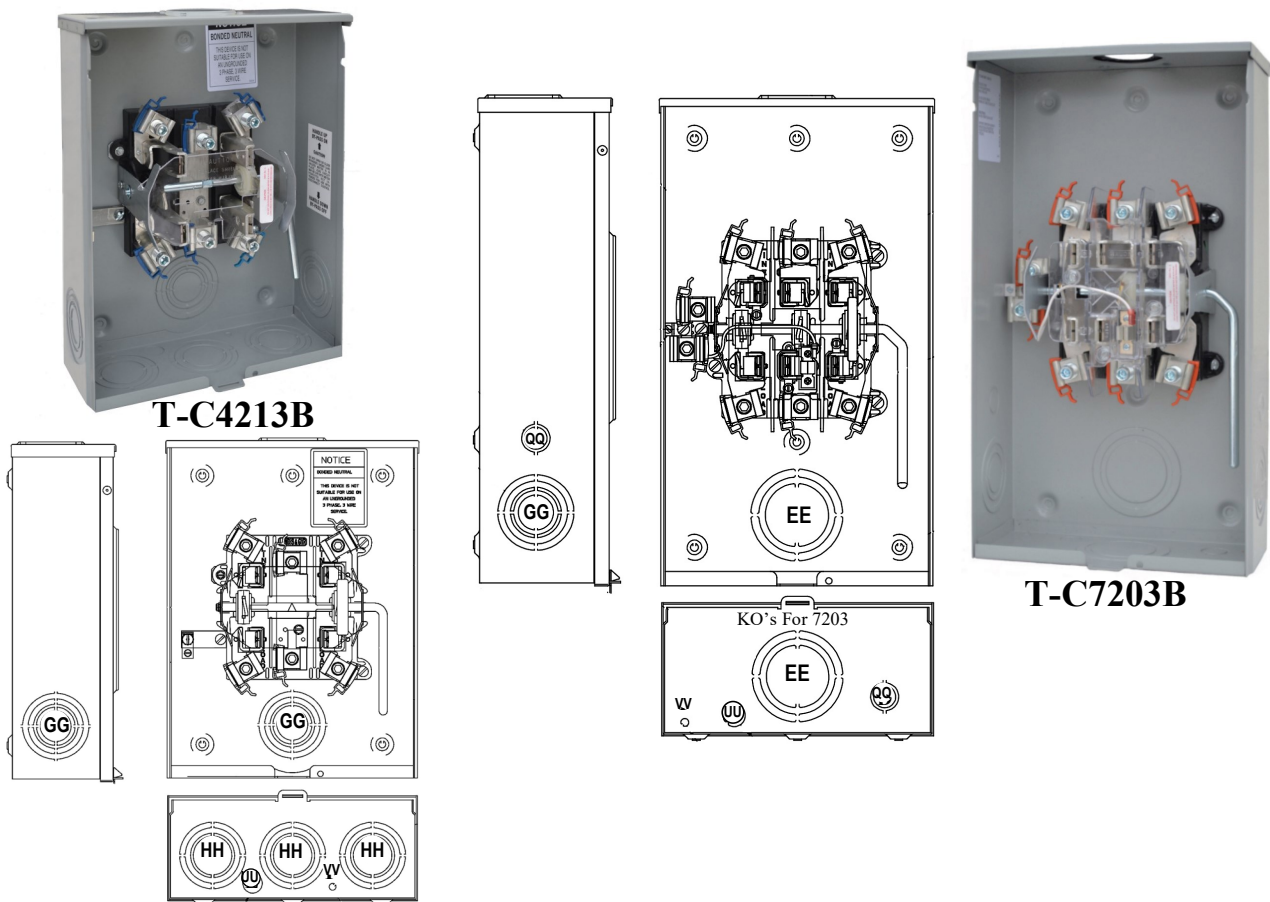

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-C4213A	200	UG	Solid	4	#6-250	#6-250	15	11	4-15/16
T-C4213B	200	OH/UG	HO	4	#6-250	#6-250	15	11	4-15/16
T-C4213C	200	OH/UG	HCP	4	#6-250	#6-250	15	11	4-15/16
T-C5213C	200	OH/UG	HCP	5	#6-250	#6-250	15	11	4-15/16
T-C7203B	200	OH	HO	7	#6-350	#6-350	19	10-1/2	4-15/16
T-C7203N	200	OH	2" Hub	7	#6-350	#6-350	19	10-1/2	4-15/16
T-C7213B	200	OH/UG	HO	7	#6-350	#6-350	19	13	4-15/16
T-C7213C	200	OH/UG	HCP	7	#6-350	#6-350	19	13	4-15/16
T-C7213P	200	OH/UG	2 1/2" Hub	7	#6-350	#6-350	19	13	4-15/16
T-C7213U	200	OH/UG	L HCP	7	#6-350	#6-350	19	13	4-15/16

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 200 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.








Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
HH	2-1/2, 2, 1-1/2, 1-1/4
QQ	3/4, 1/2
UU	1/2
VV	5/16

200 Ampere - Lever Bypass - Offset Based Meter Sockets

4,5 & 7 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC



T-H4230C

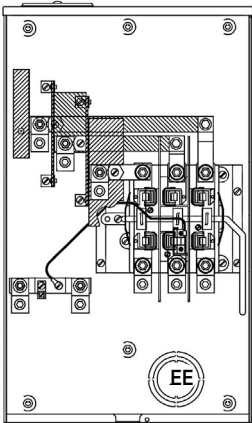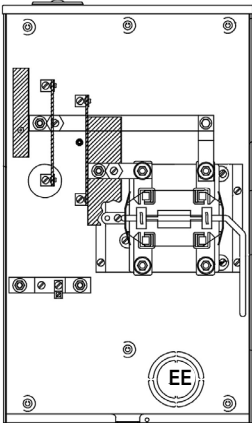

T-H7233U



Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H4230C	200	OH/UG	HCP	4	3/8" Studs	3/8" Studs	27	16	5-5/8
T-H4233A	200	UG	Solid	4	#6-350	#6-350	27	16	5-5/8
T-H5230C	200	OH/UG	HCP	5	3/8" Studs	3/8" Studs	27	16	5-5/8
T-H5230-3C	200	OH/UG	HCP	5	3/8" Studs	#6-350	27	16	5-5/8
T-H5233U	200	OH/UG	L HCP	5	#6-350	#6-350	27	16	5-5/8
T-H7230C	200	OH/UG	HCP	7	3/8" Studs	3/8" Studs	27	16	5-5/8
T-H7230U	200	OH/UG	L HCP	7	3/8" Studs	3/8" Studs	27	16	5-5/8
T-H7230-3U	200	OH/UG	L HCP	7	3/8" Studs	#6-350	27	16	5-5/8
T-H7233U	200	OH/UG	L HCP	7	#6-350	#6-350	27	16	5-5/8

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 200 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.



Concentric Knockout	
EE	3, 2-1/2, 2
UU	1/2
VV	5/16

320 Ampere - Lever Bypass Meter Sockets

4 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC



T-H4300U

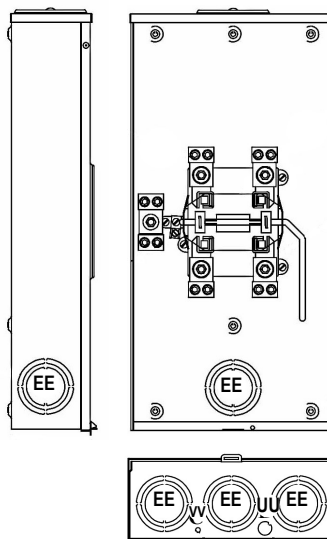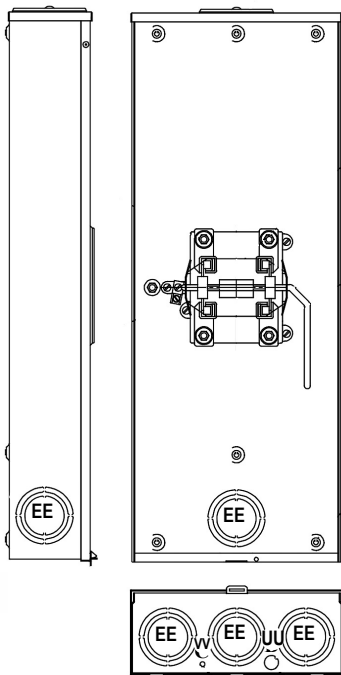

T-H4308U

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H4300Q	320	OH	3" Hub	4	3/8" Studs	3/8" Studs	34-1/2	13	4-15/16
T-H4300T	320	OH	HO	4	3/8" Studs	3/8" Studs	34-1/2	13	4-15/16
T-H4300U	320	OH	HCP	4	3/8" Studs	3/8" Studs	34-1/2	13	4-15/16
T-H4300Q	320	OH	3" Hub	4	3/8" Studs	3/8" Studs	34-1/2	13	4-15/16
T-H4306U	320	OH	HCP	4	#4-600	#4-600	34-1/2	13	4-15/16
T-H4306-9T	320	OH	HO	4	#4-600	(2) #6-350	34-1/2	13	4-15/16
T-H4308Q	320	OH	3" Hub	4	(2) #6-250	(2) #6-250	26-13/16	13	4-15/16
T-H4308U	320	OH	HCP	4	(2) #6-250	(2) #6-250	26-13/16	13	4-15/16
T-H4309Q	320	OH	3" Hub	4	(2) #6-350	(2) #6-350	34-1/2	13	4-15/16
T-H4309U	320	OH	HCP	4	(2) #6-350	(2) #6-350	34-1/2	13	4-15/16


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 320 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.






Concentric Knockout	
EE	3, 2-1/2, 2
UU	1/2
VV	5/16

320 Ampere - Lever Bypass Meter Sockets

5 & 7 Jaw | HQ Lever Bypass/Jaw Clamping | Ringless Style | 600 VAC

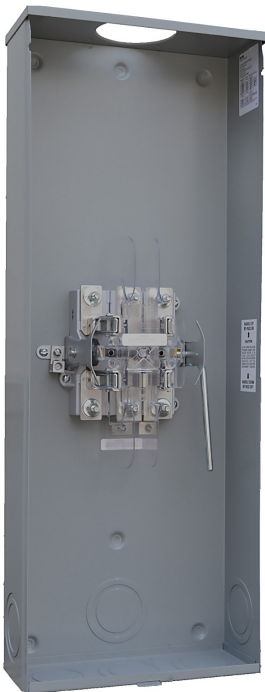

T-H5300T

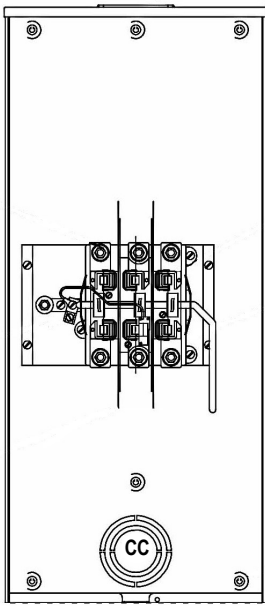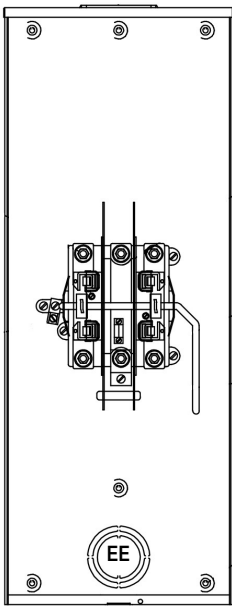

T-H7300T

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H5300T	320	OH	HO	5	3/8" Studs	3/8" Studs	34-1/2	13	4-15/16
T-H5306Q	320	OH	3" Hub	5	#4-600	#4-600	34-1/2	13	4-15/16
T-H5306T	320	OH	HO	5	#4-600	#4-600	34-1/2	13	4-15/16
T-H5308T	320	OH	HO	5	(2) #6-250	(2) #6-250	26-13/16	13	4-15/16
T-H5309U	320	OH	HCP	5	(2) #6-350	(2) #6-350	34-1/2	13	4-15/16
T-H7300Q	320	OH	3" Hub	7	3/8" Studs	3/8" Studs	34-1/2	15	5-11/16
T-H7300T	320	OH	HO	7	3/8" Studs	3/8" Studs	34-1/2	15	5-11/16
T-H7306T	320	OH	HO	7	#4-600	#4-600	34-1/2	15	5-11/16
T-H7306U	320	OH	HCP	7	#4-600	#4-600	34-1/2	15	5-11/16
T-H7308Q	320	OH	3" Hub	7	(2) #6-250	(2) #6-250	26-13/16	15	5-11/16
T-H7308T	320	OH	HO	7	(2) #6-250	(2) #6-250	26-13/16	15	5-11/16
T-H7309U	320	OH	HCP	7	(2) #6-350	(2) #6-350	34-1/2	15	5-11/16

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 320 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.



Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
EE	3, 2-1/2, 2
UU	1/2
VV	5/16

320 Ampere - Lever Bypass Offset Bused Meter Sockets

4 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC



UT-H4330U

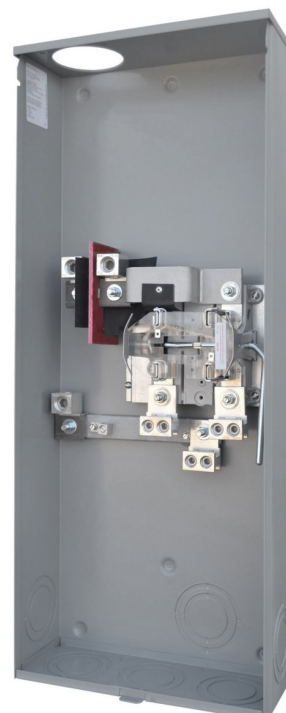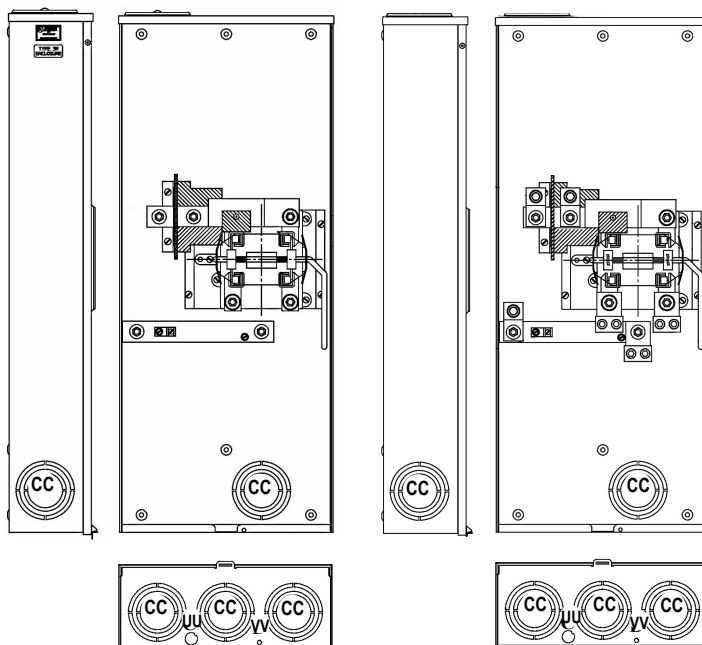

T-H4336-9T

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H4320A	320	UG	Solid	4	3/8" Studs	3/8" Studs	26	15	5-11/16
UT-H4326-9A	320	UG	Solid	4	#4-600	(2) #6-350	26	15	5-11/16
T-H4329A	320	UG	Solid	4	(2) #6-350	(2) #6-350	26	15	5-11/16
T-H4330U	320	OH/UG	HCP	4	3/8" Studs	3/8" Studs	36-5/8	15	5-11/16
UT-H4330U	320	OH/UG	HCP	4	3/8" Studs	3/8" Studs	36-5/8	15	5-11/16
T-H4336U	320	OH/UG	HCP	4	#4-600	#4-600	36-5/8	15	5-11/16
T-H4336-9T	320	OH/UG	HO	4	#4-600	(2) #6-350	36-5/8	15	5-11/16
T-H4336-9U	320	OH/UG	HCP	4	#4-600	(2) #6-350	36-5/8	15	5-11/16
T-H4338U	320	OH/UG	HCP	4	(2) #6-250	(2) #6-250	29	15	5-11/16
T-H4339T	320	OH/UG	HO	4	(2) #6-350	(2) #6-350	36-5/8	15	5-11/16
T-H4340U	320	OH/UG	HCP	4	3/8" Studs	3/8" Studs	28-1/2	18	5-11/16

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 320 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R Enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessory pages.







Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
UU	1/2
VV	5/16

320 Ampere - Lever Bypass Offset Based Meter Sockets

5 & 7 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC



UT-H5330U

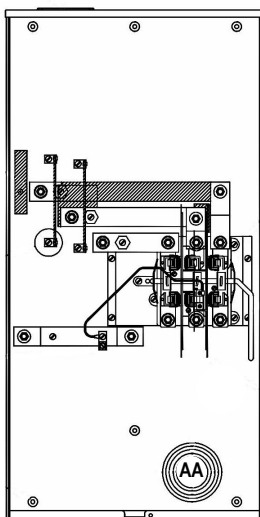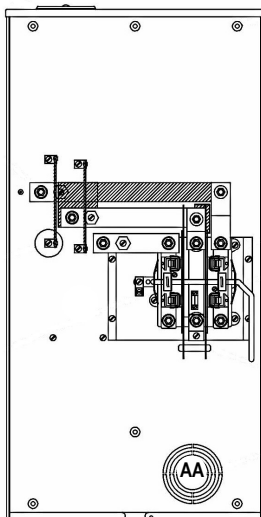

T-H7330T

Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H5330S	320	OH/UG	4" Hub	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H5330T	320	OH/UG	HO	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
UT-H5330U	320	OH/UG	HCP	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H7320A	320	UG	Solid	7	3/8" Studs	3/8" Studs	30	20	6-1/2
T-H7329A	320	UG	Solid	7	(2) #6-350	(2) #6-350	30	20	6-1/2
T-H7330T	320	OH/UG	HO	7	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H7330U	320	OH/UG	HCP	7	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
UT-H7336-9Q	320	OH/UG	3" Hub	7	#4-600	(2) #6-350	39-7/8	20	6-1/2
UT-H7336-9U	320	OH/UG	HCP	7	#4-600	(2) #6-350	39-7/8	20	6-1/2
T-H7339U	320	OH/UG	HCP	7	(2) #6-350	(2) #6-350	39-7/8	20	6-1/2

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 320 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R Enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.


Concentric Knockout	
AA	4, 3-1/2, 3, 2-1/2, 2
UU	1/2
VV	5/16

100 Ampere - Multi Position Meter Sockets

4 Jaw | 2, 3, 4, 5 & 6 Positions | Horizontal | Ringless Style | 600 VAC



T-4R1121B

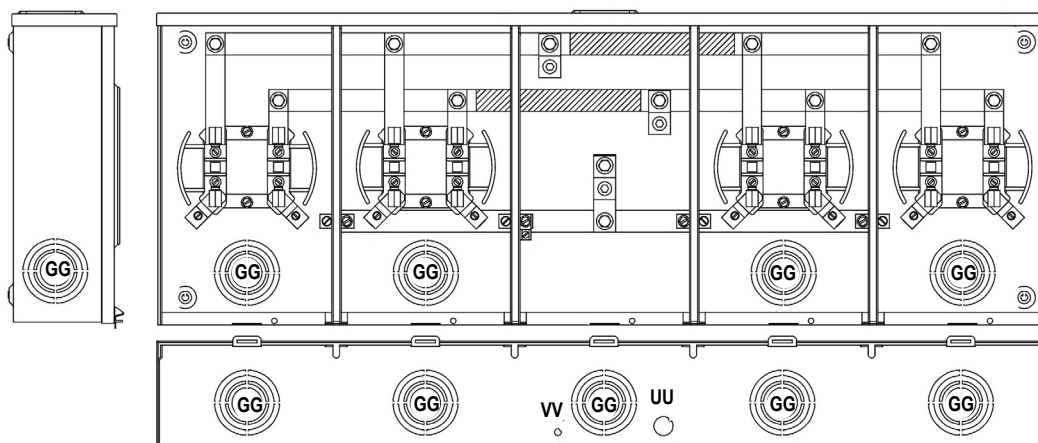

All Units Have Similar Bottom KO's & Layout

Catalog Number	Number Positions	Service	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
T-2R1121A	2	UG	Solid	#6-250	#8-2/0	14-1/8	24-5/16	4-1/2
T-2R1121B	2	OH/UG	HO	#6-250	#8-2/0	14-1/8	24-5/16	4-1/2
T-2R1121C	2	OH/UG	HCP	#6-250	#8-2/0	14-1/8	24-5/16	4-1/2
T-3R1121B	3	OH/UG	HO	#6-250	#8-2/0	14-1/8	32-15/32	4-1/2
T-3R1121C	3	OH/UG	HCP	#6-250	#8-2/0	14-1/8	32-15/32	4-1/2
T-4R1121A	4	UG	Solid	#6-250	#8-2/0	14-1/8	40-5/8	4-1/2
T-4R1121B	4	OH/UG	HO	#6-250	#8-2/0	14-1/8	40-5/8	4-1/2
T-4R1121C	4	OH/UG	HCP	#6-250	#8-2/0	14-1/8	40-5/8	4-1/2
T-5R1121B	5	OH/UG	HO	#6-250	#8-2/0	14-1/8	48-25/32	4-1/2
T-5R1121C	5	OH/UG	HCP	#6-250	#8-2/0	14-1/8	48-25/32	4-1/2
T-6R1131B	6	OH/UG	HO	#6-350	#8-2/0	14-1/8	56-15/16	4-1/2
T-6R1131C	6	OH/UG	HCP	#6-350	#8-2/0	14-1/8	56-15/16	4-1/2


Hub / Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Add prefix G for factory installed, grounded 5th terminal.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units.
Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.


Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

100 & 200 Ampere - Multi Position End Feed Meter Sockets


4 Jaw | 2, 3, 4, 5 & 6 Positions | Horizontal | Ringless Style | 600 VAC

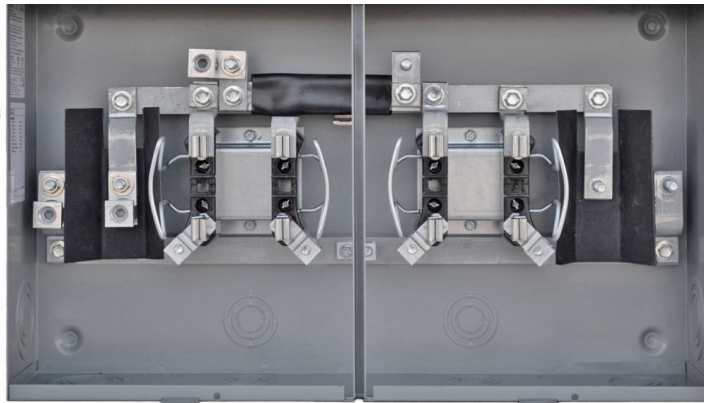


2R1621A

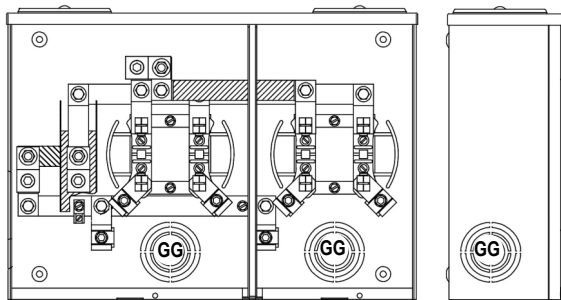

T-2R2432U

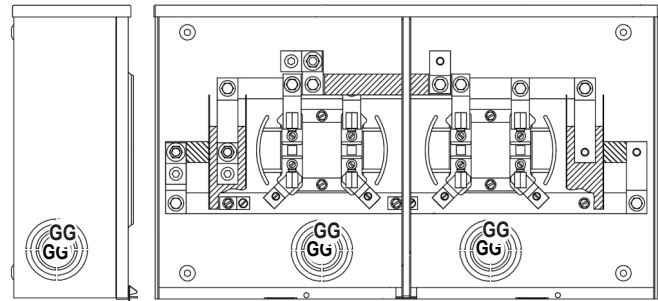


Left Or Right End Feed



2R1621A

Bottom KO's For 2R1621A & T-2R2632B



Units Other Than 2R1621A & T-2R2632B
Have Similar KO's & Layout As T-2R2432U

Catalog Number	Number Positions	Amp	Service	Hub	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-2R1421B	2 - End Feed	100	OH/UG	(1) S HO/(1) S HCP	#6-250	#8-2/0	14-1/8	20-5/32	5-3/8
2R1421N	2 - End Feed	100	OH/UG	(1) 2" Hub/(1) S HCP	#6-250	#8-2/0	14-1/8	20-5/32	5-3/8
2R1621A	2 - End Feed	100	UG	Solid	#6-250	#8-2/0	14-1/8	24-5/32	5-3/8
T-2R2432U	2 - End Feed	200	OH/UG	(2) Large HCP	#6-350	#8-2/0	14-1/8	20-5/32	5-3/8
T-2R2632B	2 - End Feed	200	OH/UG	(1) HO/(1) S HCP	#6-350	#8-2/0	14-1/8	24-5-32	5-3/8
T-3R1421B	3 - End Feed	100	OH/UG	(1) S HO/(1) S HCP	#6-250	#8-2/0	14-1/8	28-5/16	5-3/8
UT-3R1421N	3 - End Feed	100	OH/UG	(1) 2" Hub/(1) S HCP	#6-250	#8-2/0	14-1/8	28-5/16	5-3/8
4R1421A	4 - End Feed	100	UG	Solid	#6-250	#8-2/0	14-1/8	36-15/32	5-3/8
4R1421N	4 - End Feed	100	OH/UG	(1) 2" Hub/(1) S HCP	#6-250	#8-2/0	14-1/8	36-15/32	5-3/8
5R1421P	5 - End Feed	100	OH/UG	(1) 2 1/2" Hub/(1) S HCP	#6-250	#8-2/0	14-1/8	44-5/8	5-3/8
6R1431B	6 - End Feed	100	OH/UG	(1) S HO/(1) S HCP	#6-350	#8-2/0	14-1/8	52-25/32	5-3/8
6R1431N	6 - End Feed	100	OH/UG	(1) 2" Hub/(1) S HCP	#6-350	#8-2/0	14-1/8	52-25/32	5-3/8
6R1431P	6 - End Feed	100	OH/UG	(1) 2 1/2" Hub/(1) S HCP	#6-350	#8-2/0	14-1/8	52-25/32	5-3/8

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Add prefix G for factory installed, grounded 5th terminal.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units.
Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.



Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

200 Ampere - Multi Position Meter Sockets

4 Jaw | 2, 3, 4, 5 & 6 Positions | Horizontal | Ringless Style | 600 VAC




T-3R2332T

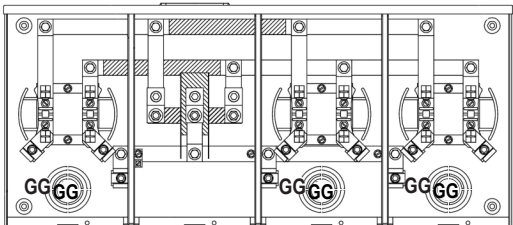

Bottom KO's For 2 & 3 Position



Bottom KO's For 4 Position



Bottom KO's For 5 & 6 Position

Catalog Number	Number Positions	Service	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
T-2R2332A	2	UG	Solid	#6-350	#8-250	14-1/8	24-5/16	5-3/8
T-2R2332T	2	OH/UG	L HO	#6-350	#8-250	14-1/8	24-5/16	5-3/8
T-2R2332U	3	OH/UG	L HCP	#6-350	#8-250	14-1/8	24-5/16	5-3/8
T-3R2332T	3	OH/UG	L HO	#6-350	#8-250	14-1/8	32-15/32	5-3/8
T-3R2332U	3	OH/UG	L HCP	#6-350	#8-250	14-1/8	32-15/32	5-3/8
T-3R2352U	3	OH/UG	L HCP	#1/0-500	#8-250	14-1/8	32-15/32	5-3/8
T-4R2352A	4	UG	Solid	#1/0-500	#8-250	14-1/8	40-5/8	5-3/8
T-4R2352T	4	OH/UG	L HO	#1/0-500	#8-250	14-1/8	40-5/8	5-3/8
T-4R2352U	4	OH/UG	L HCP	#1/0-500	#8-250	14-1/8	40-5/8	5-3/8
T-4R2392U	4	OH/UG	L HCP	(2) #1/0-500	#8-250	14-1/8	46-5/8	5-3/8
T-5R2392TT	5	OH/UG	(2) L HO	(2) #1/0-500	#8-250	14-1/8	54-25/32	5-3/8
T-5R2392UU	5	OH/UG	(2) L HCP	(2) #1/0-500	#8-250	14-1/8	54-25/32	5-3/8
T-6R2392TT	6	OH/UG	(2) L HO	(2) #1/0-500	#8-250	14-1/8	62-15/16	5-3/8
T-6R2392UU	6	OH/UG	(2) L HCP	(2) #1/0-500	#8-250	14-1/8	62-15/16	5-3/8


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Add prefix G for factory installed, grounded 5th terminal.
- G-90 galvanized steel, NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessories pages.


Concentric Knockout	
EE	3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

200 Ampere - Lever Bypass - Multi Position Meter Sockets

4, 5 & 7 Jaw | 2, 3, 4, 5 & 6 Positions | Horizontal | Ringless Style | 600 VAC

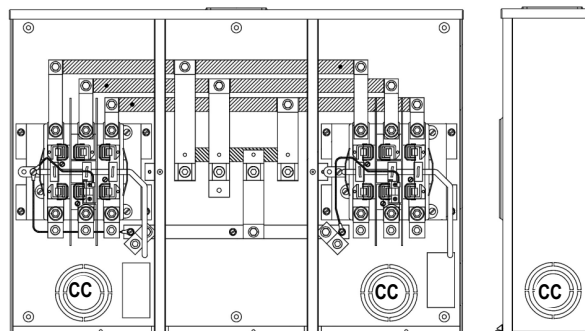


2H72353T



Bottom KO's For 2 & 3 Position



2H72353T



Bottom KO's For 4, 5 & 6 Position

Catalog Number	# Jaws	Number Positions	Hub	Load & Neutral Connectors	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
2H42353U	4	2	HCP	#1/0-500	#6-350	23-9/16	32-25/32	6	3-1/2
3H42353U	4	3	HCP	#1/0-500	#6-350	23-9/16	43-29/32	6	3-1/2
4H42393UU	4	4	(2) HCP	(2) #1/0-500	#6-350	23-9/16	61-1/32	6	3-1/2
5H42393UU	4	5	(2) HCP	(2) #1/0-500	#6-350	23-9/16	72-5/32	6	3-1/2
6H42393TT	4	6	(2) HO	(2) #1/0-500	#6-350	23-9/16	83-9/32	6	3-1/2
2H52353T	5	2	HO	#1/0-500	#6-350	23-9/16	32-25/32	6	3-1/2
3H52353U	5	3	HCP	#1/0-500	#6-350	23-9/16	43-29/32	6	3-1/2
4H52393UU	5	4	(2) HCP	(2) #1/0-500	#6-350	23-9/16	61-1/32	6	3-1/2
5H52393UU	5	5	(2) HCP	(2) #1/0-500	#6-350	23-9/16	72-5/32	6	3-1/2
6H52393TT	5	6	(2) HO	(2) #1/0-500	#6-350	23-9/16	83-9/32	6	3-1/2
2H72353T	7	2	HCP	#1/0-500	#6-350	23-9/16	32-25/32	6	3-1/2
3H72353U	7	3	HCP	#1/0-500	#6-350	23-9/16	43-29/32	6	3-1/2
4H72393UU	7	4	(2) HCP	(2) #1/0-500	#6-350	23-9/16	61-1/32	6	3-1/2
5H72393TT	7	5	(2) HO	(2) #1/0-500	#6-350	23-9/16	72-5/32	6	3-1/2
6H72393TT	7	6	(2) HO	(2) #1/0-500	#6-350	23-9/16	83-9/32	6	3-1/2

Hub / Top Configuration	Catalog Suffix	Hub / Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- G-90 galvanized steel, NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessories pages.





Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
QQ	3/4, 1/2
VV	5/16

Socket Breaker Combinations - NEC 2023 & UL67 Compliant

4 Jaw | Single Phase | 100 Ampere | Ring & Ringless | 120/240 VAC



UDH122N0B-N

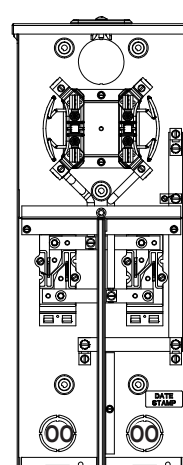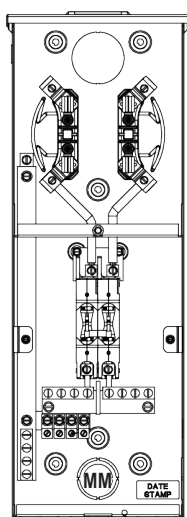

UP140W0C-C

Catalog Number		Poles	Provisions For Add'l. Breakers Bolt-In	Provisions For Add'l. Breakers Plug-In	2 Pole Hydraulic Breaker Installed	2 Pole Plug-In Breaker Installed	Load & Neutral Connectors	Hub	Dimensions		
Ringless	Ring								H"	W"	D"
*H120N0B	-	2	(1) 2-Pole	-	-	-	#14-1/0	HO	23-3/4	8	3-1/2
*H122N0B	-	2		-	100 Amp	-	#14-1/0	HO	23-3/4	8	3-1/2
*H122N0M	-	2		-	100 Amp	-	#14-1/0	1-1/2" Hub	23-3/4	8	3-1/2
-	*DRH122N0N	2		-	100 Amp	-	(3) #14-1/0	2" Hub	23-3/4	8	3-1/2
*UDH122N0B-N	-	2		-	100 Amp	-	(3) #14-1/0	HO	23-3/4	8	3-1/2
P120N0B	-	2	(1) 2-Pole	-	-	-	#14-1/0	HO	23-3/4	8	3-1/2
P120N0M	-	2	(1) 2-Pole	-	-	-	#14-1/0	1-1/2" Hub	23-3/4	8	3-1/2
UP142W0B-C	-	4	(1) 2-Pole	-	100 Amp	(2)#14-1/0	HO	24	9	4-3/8	
UP142W0B-S	-	4	(1) 2-Pole	-	100 Amp	#14-1/0	HO	24	9	4-3/8	
UP140W0C-C	-	4	(2) 2-Pole	-	-	#14-1/0	HCP	24	9	4-3/8	
UP142W0M-C	-	4	(1) 2-Pole	-	100 Amp	(2)#14-1/0	1-1/2" Hub	24	9	4-3/8	
UP142W0M-S	-	4	(1) 2-Pole	-	100 Amp	#14-1/0	1-1/2" Hub	24	9	4-3/8	

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Line side connectors are #6-2/0 CU/AL, units supplied with load distribution center have (3) #14-1/0 CU/AL connectors.
- Ring units are supplied less sealing ring.
- G-90 galvanized steel, NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- Plug-in breaker units will accept Square-D Type: Hom, Eaton Type: BR, Siemens Type: QP, GE Type: THQL breakers.
- For Meter Socket options see replacement parts & accessories pages.
- -C option is Parallel wired. -S option is Series wired.

Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
II	2-1/2, 2, 1-1/4, 1
LL	2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16






- Other NEC 2023 Socket Breaker configurations available.
Please contact your Durham Company agent for your needs.

Socket Breaker Combinations - NEC 2023 & UL67 Compliant

4 Jaw | Single Phase | 150 & 200 Ampere | Ring & Ringless | 120/240 VAC



UDC222W1N-N

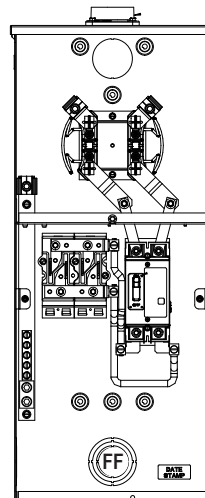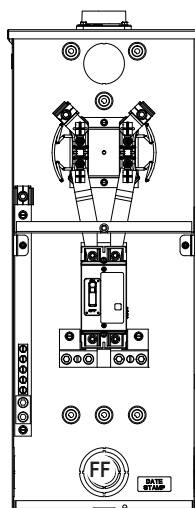

UC262W1N-S

Catalog Number		Poles	2 Pole Bolt-In Breaker Installed	Provisions For Additional Plug-In Breakers	Load & Neutral Connectors	Hub	Dimensions		
Ringless	Ring						H"	W"	D"
UDC222B1B-N	-	2	200 Amp	-	(2) #6-250 (1) #14-2/0	HO	29	11	4-3/8
UDC222W1C-N	-	2	200 Amp	-	(2) #6-250 (1) #14-2/0	HCP	29	11	4-3/8
UDC222W1N-N	-	2	200 Amp	-	(2) #6-250 (1) #14-2/0	2" Hub	29	11	4-3/8
UC242W1B-S	-	4	200 Amp	(1) 2-Pole	2/0-250	HO	29-3/8	12	4-3/8
UC242W1N-S	-	4	200 Amp	(1) 2-Pole	2/0-250	2" Hub	29-3/8	12	4-3/8
UC262W1B-S	-	6	200 Amp	(2) 2-Pole	2/0-250	HO	29-3/8	12	4-3/8
UC262W1C-S	-	6	200 Amp	(2) 2-Pole	2/0-250	HCP	29-3/8	12	4-3/8
UC262W1N-S	-	6	200 Amp	(2) 2-Pole	2/0-250	2" Hub	29-3/8	12	4-3/8

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Line side connectors are #6-350MCM CU-UL, units supplied with load distribution connectors have (2) #6-250MCM CU/AL, (1) #14-2/0 CU/AL connectors.
- Units without load and neutral distribution connectors have #6-250MCM CU-AL connectors.
- Ring units are supplied less sealing ring.
- G-90 galvanized steel, NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- Plug-in breaker units will accept Square-D Type: Hom, Eaton Type: BR, Siemens Type: QP, GE Type: THQL breakers.
- For Meter Socket options see replacement parts & accessories pages.
- -C option is Parallel wired. -S option is Series wired.

Concentric Knockout	
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16




- Other NEC 2023 Socket Breaker configurations available.
Please contact your Durham Company agent for your needs.

Socket Breaker Combinations - NEC 2023 & UL67 Compliant

4 Jaw | Single Phase | 200 Ampere | Overhead/Underground | with Wireway | Ring & Ringless | 120/240 VAC



UP2102D1C-SV

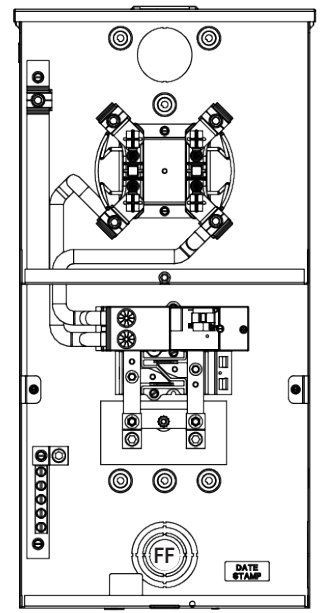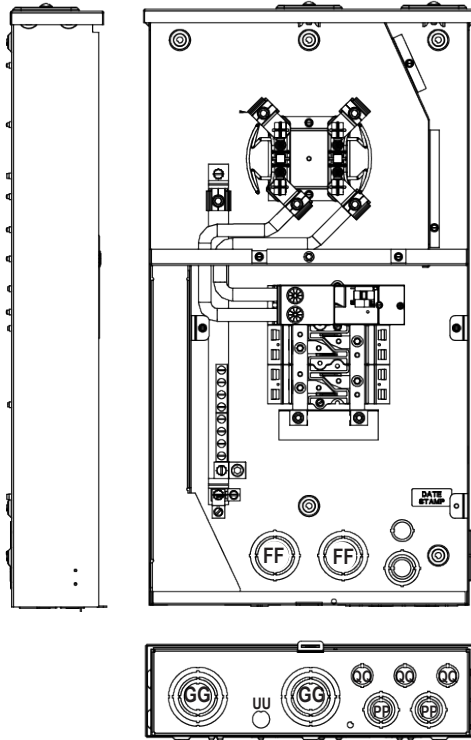

UP242W1B-SV

Catalog Number		Poles	2 Pole Plug-In Breaker Installed	Provisions For Additional Plug-In Breakers	Load & Neutral Connectors	Hub	Dimensions		
Ringless	Ring						H"	W"	D"
UP2102D1C-SV	-	10	200 Amp	(4) 2 Pole	#2/0-250 & #14 - 1/0	HCP	30.06	16.12	4.357
UP242W1B-SV	-	4	200 Amp	(1) 2 Pole	#2/0-250 & #14 - 1/0	HO	27.06	13.12	4.357
UP242W1N-SV	-	4	200 Amp	(1) 2 Pole	#2/0-250 & #14 - 1/0	2" Hub	27.06	13.12	4.357
UP262W1C-SV	-	6	200 Amp	(2) 2 Pole	#2/0-250 & #14 - 1/0	3-5/16" Hub	27.06	13.12	4.357
UP262W1N-SV	-	6	200 Amp	(2) 2 Pole	#2/0-250 & #14 - 1/0	2" Hub	27.06	13.12	4.357

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Line side connectors are #6-350MCM CU-UL, units supplied with load distribution connectors have (2) #6-250MCM CU/AL, (1) #14-2/0 CU/AL connectors.
- Units without load and neutral distribution connectors have #6-250MCM CU-AL connectors.
- Ring units are supplied less sealing ring.
- G-90 galvanized steel, NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- Plug-in breaker units will accept Square-D Type: Hom, Eaton Type: BR, Siemens Type: QP, GE Type: THQL breakers.
- For Meter Socket options see replacement parts & accessories pages.
- -C option is Parallel wired. -S option is Series wired. -SV option is Series wired vertical pad.

Concentric Knockout	
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
QQ	3/4, 1/2
UU	1/2
VV	5/16


- Other NEC 2023 Socket Breaker configurations available.
Please contact your Durham Company agent for your needs.

Socket Breaker Combinations - NEC 2023 & UL67 Compliant


4 Jaw | Single Phase | 200 Ampere | Overhead/Underground | with Wireway | Ring & Ringless | 120/240 VAC



1013133

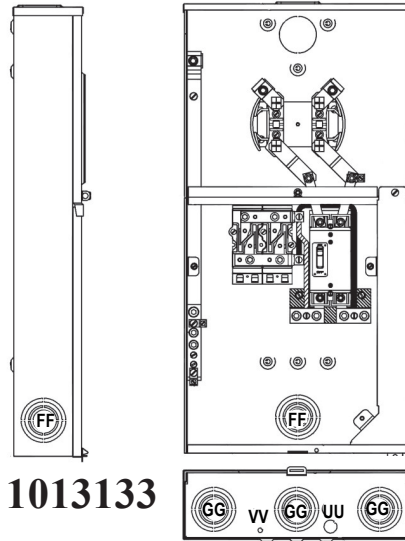

1013133

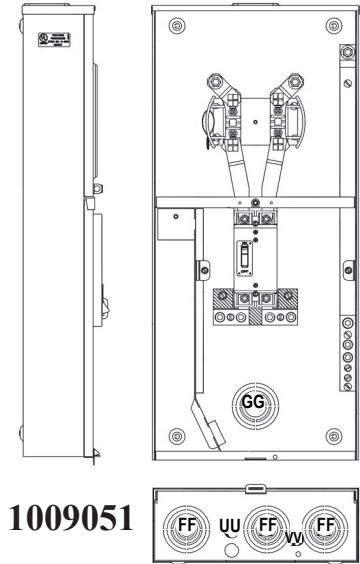

1009051

Catalog Number		Poles	2 Pole Bolt-In Breaker Installed	Provisions For Additional Plug-In Breakers	Wire Size CU-AL		Hub	Dimensions		
Ringless	Ring				Line	Load		H"	W"	D"
*1009051	-	2	200 Amp	-	3/8" Stud	(2) #6-250	HO	29	13	4-3/8
**1010206B	-	6	200 Amp	(2) 2-Pole	#6-350	(2) #6-250	HO	30	15	4-3/8

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Ring units supplied less sealing ring.
- **Provisions for (2) 2-pole plug-in breakers (100 Amp max).
- **1010206B units will accept plug-in breakers Square-D Type-Hom; Eaton Type-BR; Siemens Type-QP; GE Type- THQL.
- Plug-in breaker pad for 1010206B is wired in series with main breaker.
- 1010206B has solid bottom front instead of breaker access door.
- *1009051 has UL label. Contact representative or factory about UL for other units.
- G-90 galvanized steel, NEMA 3R enclosures.
- For Meter Socket options see replacement parts & accessories pages.

- Other NEC 2023 Socket Breaker configurations available.
- Please contact your Durham Company agent for your needs.



Concentric Knockout	
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

Socket Breaker Combinations - NEC 2023 & UL67 Compliant

4 Jaw | Single Phase | 320 Ampere | HQ Lever Bypass | Ringless | 120/240 VAC



1012772

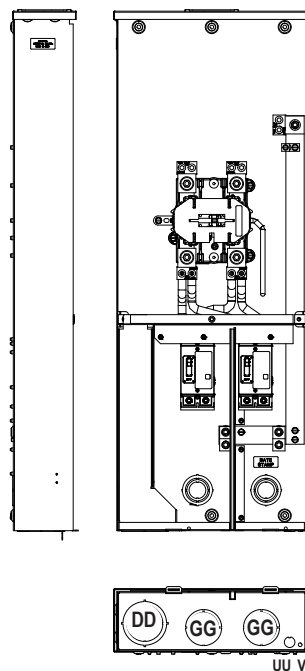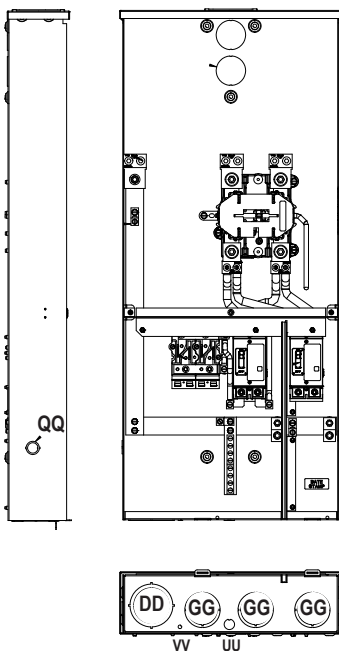

UHC344N3T-C



Catalog Number	Bolt-In Breakers Installed	Provisions For Breakers	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
*UHC344N3T-C	(2) 2-Pole 200 Amp	-	(LG) HO	(2) #6-250	#2/0-250	42.716	15.620	4.920
* UHC344N4T-C	(2) 2-Pole 200 Amp		(LG) HO	(2) #6-350	#2/0-250	42.716	14.120	4.920
* UHC344N5T-C	(2) 2-Pole 200 Amp		(LG) HO	(2) #6-350	#2/0-250	42.716	14.120	4.920
1012772	(2) 2-Pole 200 Amp	**(2) 2-Pole	(LG) HO	(2) #6-350	#2/0-250	42.716	18.120	4.920

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

For "PD Series" equipped options contact the manufacturer.


- **Plug-in breaker units will accept Square-D Type-Hom; Eaton Type-BR; Siemens Type-QP; GE Type- THQL.
- Plug-in breakers are wired in series with the main breaker.
- *Unit has UL label.
- NEMA 3R enclosures.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.

- Other NEC 2023 Socket Breaker configurations available.
- Please contact your Durham Company agent for your needs.

Concentric Knockout	
AA	4, 3-1/2, 3, 2-1/2, 2
CC	3-1/2, 3, 2-1/2, 2
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
OO	1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

100 Ampere Socket Breaker Combinations

4 Jaw | Multi Position 2, 3, 4, 5 & 6 Positions | Horizontal | Ringless | 120/240 VAC

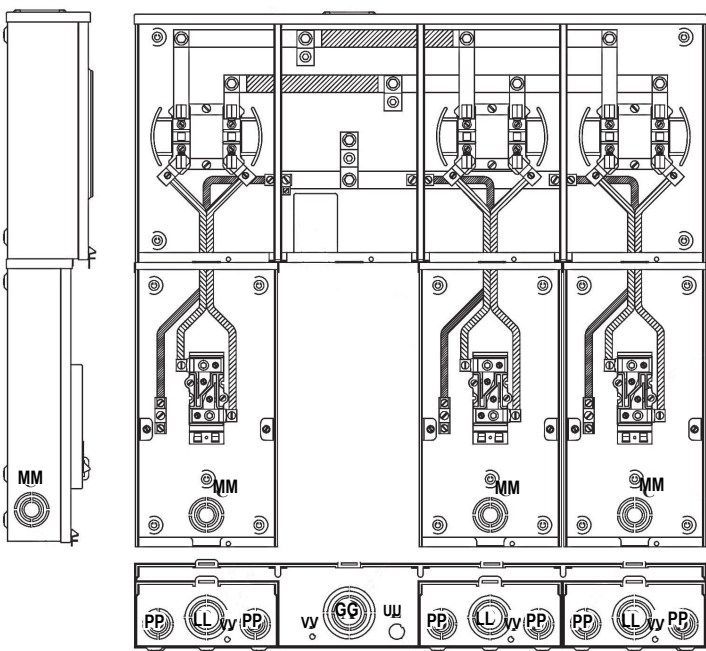

SBG1013B

KO Pattern's For All SBG101 Units



SBG1012N

Catalog Number	# Positions	Provisions For 100 Amp Breakers	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
SBG1012A	2	(2) 2-Pole	Solid	#6-250	#14-1/0	30.433	24.432	4.555
SBG1012B	2	(2) 2-Pole	HO	#6-250	#14-1/0	30.433	24.432	4.555
SBG1012N	2	(2) 2-Pole	2" Hub	#6-250	#14-1/0	30.433	24.432	4.555
SBG1013A	3	(3) 2-Pole	Solid	#6-250	#14-1/0	30.433	32.588	4.555
SBG1013B	3	(3) 2-Pole	HO	#6-250	#14-1/0	30.433	32.588	4.555
SBG1014A	4	(4) 2-Pole	Solid	#6-250	#14-1/0	30.433	40.747	4.555
SBG1014B	4	(4) 2-Pole	HO	#6-250	#14-1/0	30.433	40.744	4.555
SBG1014C	4	(4) 2-Pole	HCP	#6-250	#14-1/0	30.433	40.747	4.555
SBG1014N	4	(4) 2-Pole	2" Hub	#6-250	#14-1/0	30.433	40.744	4.555
SBG1014P	4	(4) 2-Pole	2-1/2" Hub	#6-250	#14-1/0	30.433	40.744	4.555
SBG1015A	5	(5) 2-Pole	Solid	#6-350	#14-1/0	30.433	48.903	4.555
SBG1015B	5	(5) 2-Pole	HO	#6-350	#14-1/0	30.433	48.903	4.555
SBG1015C	5	(5) 2-Pole	HCP	#6-350	#14-1/0	30.433	48.903	4.555
SBG1016A	6	(6) 2-Pole	Solid	#6-350	#14-1/0	30.433	57.061	4.555
SBG1016B	6	(6) 2-Pole	HO	#6-350	#14-1/0	30.433	57.061	4.555
SBG1016C	6	(6) 2-Pole	HCP	#6-350	#14-1/0	30.433	57.061	4.555
SBG1016P	6	(6) 2-Pole	2-1/2" Hub	#6-350	#14-1/0	30.433	57.061	4.555

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- 100 ampere units are supplied without breakers.
- 100 ampere units will accept Square-D Type-Hom; Eaton Type-BR; Siemens Type-QP; GE Type- THQL.
- NEMA 3R Enclosures.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.


Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
LL	2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

200 Ampere Socket Breaker Combinations

4 Jaw | Multi Position | 2, 3 4, 5 & 6 Positions | Horizontal | Ringless | 120/240 VAC



SBG2022W



SBG2024T

200 AMPERE								
Catalog Number	# Positions	200 Amp Bolt-In Breakers Installed	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
SBG2022A	2	(2) 2-Pole	Solid	#6-250	#2/0-250	37-3/8	24-5/16	5-3/8
SBG2022T	2	(2) 2-Pole	(LG) HO	#6-250	#2/0-250	37-3/8	24-5/16	5-3/8
SBG2022U	2	(2) 2-Pole	(LG) HCP	#6-250	#2/0-250	37-3/8	24-5/16	5-3/8
SBG2022W	2	(2) 2-Pole	2" Hub	#6-250	#2/0-250	37-3/8	24-5/16	5-3/8
SBG2023A	3	(3) 2-Pole	Solid	#6-350	#2/0-250	37-3/8	32-15/32	5-3/8
SBG2023T	3	(3) 2-Pole	(LG) HO	#6-350	#2/0-250	37-3/8	32-15/32	5-3/8
SBG2023U	3	(3) 2-Pole	(LG) HCP	#6-350	#2/0-250	37-3/8	32-15/32	5-3/8
SBG2024A	4	(4) 2-Pole	Solid	1/0-500	#2/0-250	37-3/8	40-5/8	5-3/8
SBG2024T	4	(4) 2-Pole	(LG) HO	1/0-500	#2/0-250	37-3/8	40-5/8	5-3/8
SBG2024U	4	(4) 2-Pole	(LG) HCP	1/0-500	#2/0-250	37-3/8	40-5/8	5-3/8
* SBG2025UU	5	(5) 2-Pole	(2) (LG) HCP	* 1/0-500	#2/0-250	37-3/8	55	5-3/8
* SBG2026A	6	(6) 2-Pole	Solid	* 1/0-500	#2/0-250	37-3/8	63-1/8	5-3/8
* SBG2026U	6	(6) 2-Pole	(LG) HCP	* 1/0-500	#2/0-250	37-3/8	63-1/8	5-3/8

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- *Has provisions for (2) 1/0-350MCM connectors.
- NEMA 3R enclosures.
- G-90 galvanized steel.
- NEC 2023 & UL 67 compliant.
- For Meter Socket options see replacement parts & accessories pages.



Concentric Knockout	
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

Breaker Enclosures


Single Phase | 120/240 VAC | 50, 70 & 100 Ampere Hydraulic | 125 - 225 Ampere Current Limiting



2022B

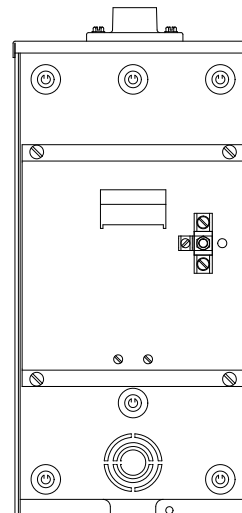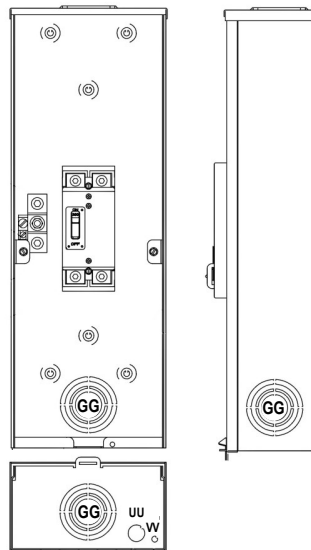

U1931083K



50, 70 & 100 AMPERE HYDRAULIC MAGNETIC CIRCUIT BREAKER ENCLOSURE								
Catalog Number	Provisions For Breakers	Hydraulic Magnetic Circuit Breakers	Wire Size CU-AL		Hub	Dimensions		
			Line	Load		H"	W"	D"
U1931083K	4 Slots	Provisions For Bkr.	-	-	1" Hub	16-1/4	8	3-1/2
U1931083M	4 Slots	Provisions For Bkr.	-	-	1-1/2" Hub	16-1/4	8	3-1/2


125,150,175, 200 & 225 AMPERE CIRCUIT BREAKER ENCLOSURES							
Catalog Number	With Breakers Installed	Wire Size CU-AL		Hub	Dimensions		
		Line	Load		H"	W"	D"
2020B	Provisions For Bkr.	-	-	HO	23-3/16	8	4-23/64
1252B	2 Pole 125 Amp	2/0-250	2/0-250	HO	16-1/4	8	4-23/64
1552B	2 Pole 150 Amp	2/0-250	2/0-250	HO	16-1/4	8	4-23/64
1752B	2 Pole 175 Amp	2/0-250	2/0-250	HO	16-1/4	8	4-23/64
2022A	2 Pole 200 Amp	2/0-250	2/0-250	SOLID	16-1/4	8	4-23/64
2022B	2 Pole 200 Amp	2/0-250	2/0-250	HO	16-1/4	8	4-23/64
2052B	2 Pole 225 Amp	2/0-250	2/0-250	HO	16-1/4	8	4-23/64
3821083B	2 Pole 100 Amp	#14-1/0	#14-1/0	HO	16-1/4	8	3-1/2
3861083B	2 Pole 100 Amp	#14-1/0	#14-1/0	HO	16-1/4	8	3-1/2

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	1-1/4" (SM)	L
For Hub (SM)	B	1-1/2" (SM)	M
HCP (SM)	C	2" (SM)	N
		2-1/2"(SM)	P

Concentric Knockout			
GG	2-1/2, 2, 1-1/2, 1-1/4, 1	PP	1-1/4, 1, 3/4, 1/2
LL	2, 1-1/2, 1-1/4, 1	UU	1/2
MM	1-1/2, 1-1/4, 1, 3/4, 1/2	VV	5/16

Breaker Enclosures

Single Phase | 150 & 200 Ampere | 120/240 VAC

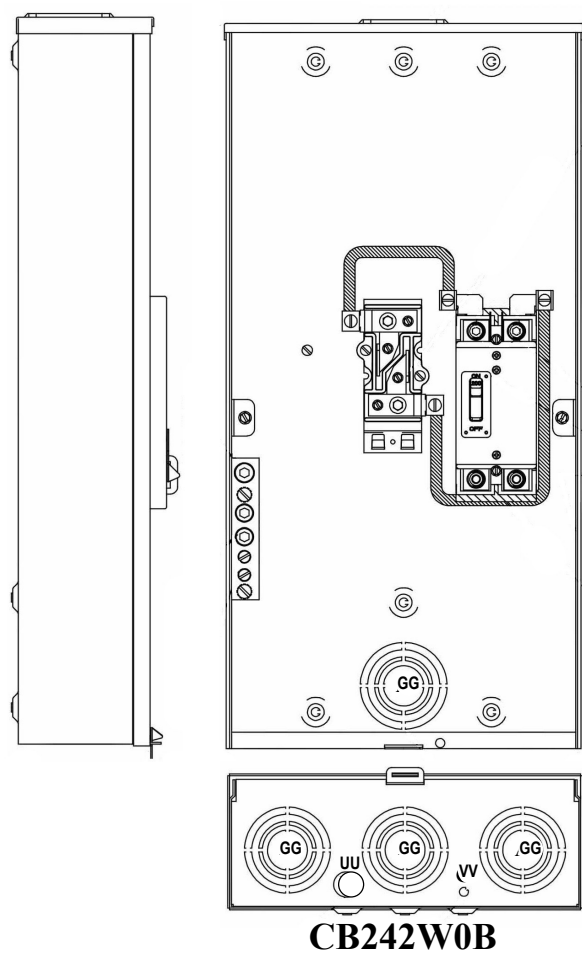

200 AMPERE									
Catalog Number	Unit Rating	Installed Main Breaker Rating	# Plug-In Poles Available	Wire Size CU-AL		Hub	Dimensions		
				Line	Load		H"	W"	D"
CB542W0B	200 Amps	2 Pole 150 Amps	2 Pole	#2/0-300	#2/0-250	HO	23-3/4	12	4-3/8
CB562W0B	200 Amps	2 Pole 150 Amps	(2) 2 Pole	#2/0-300	#2/0-250	HO	23-3/4	12	4-3/8
CB242W0B	200 Amps	2 Pole 200Amps	2 Pole	#2/0-300	#2/0-250	HO	23-3/4	12	4-3/8
CB262W0B	200 Amps	2 Pole 200Amps	(2) 2 Pole	#2/0-300	#2/0-250	HO	23-3/4	12	4-3/8
CB262W0N	200 Amps	2 Pole 200Amps	(2) 2 Pole	#2/0-300	#2/0-250	2" Hub	23-3/4	12	4-3/8

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Acceptable 2-pole plug-in breakers: Square-D Type-Hom; Eaton Type-BR; Siemens Type-QP; GE Type- THQL.
- Plug-In breaker spaces are wired in parallel with the main breaker.
- Add "U" prefix to catalog number for UL label.
- G-90 galvanized steel, NEMA 3R enclosures.
- For Meter Socket options see replacement parts & accessories pages.


Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

20 Ampere - Transformer Rated Meter Sockets

5 & 6 Jaw | Ring & Ringless Style | 600 VAC



R6851-5B

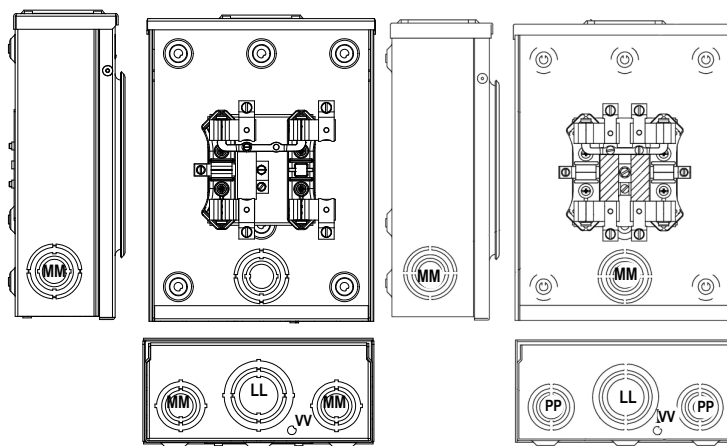

R6851-6B

RING STYLE							
Catalog Number	Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Dimensions		
					H"	W"	D"
R6851-5A	5	Solid	Yes	-	10-7/8	8	3-1/2
R6851-5B	5	HO	Yes	-	10-7/8	8	3-1/2
R6851-5C	5	HCP	Yes	-	10-7/8	8	3-1/2
R6851-5K	5	1" Hub	Yes	-	10-7/8	8	3-1/2
R6851-5L	5	1-1/4" Hub	Yes	-	10-7/8	8	3-1/2
R6851-5N-B	5	HO	-	Yes	10-7/8	8	3-1/2
R6851-5N-C	5	HCP	-	Yes	10-7/8	8	3-1/2
R6851-5N-K	5	1" Hub	-	Yes	10-7/8	8	3-1/2
R6851-6-A	6	Solid	Yes	-	10-7/8	8	3-1/2
R6851-6-B	6	HO	Yes	-	10-7/8	8	3-1/2
R6851-6-C	6	HCP	Yes	-	10-7/8	8	3-1/2
R6851-6-K	6	1" Hub	Yes	-	10-7/8	8	3-1/2
R6851-6-L	6	1-1/4" Hub	Yes	-	10-7/8	8	3-1/2
R6851-6N-A	6	Solid	-	Yes	10-7/8	8	3-1/2
R6851-6N-B	6	HO	-	Yes	10-7/8	8	3-1/2
R6851-6N-K	6	1" Hub	-	Yes	10-7/8	8	3-1/2
R6851-6N-L	6	1-1/4" Hub	-	Yes	10-7/8	8	3-1/2

RINGLESS STYLE							
Catalog Number	Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Dimensions		
					H"	W"	D"
6851-5K	5	1" Hub	Yes	-	10-7/8	8	3-1/2
U6851-6-B	6	HO	Yes	-	10-7/8	8	3-1/2
U6851-6N-B	6	HO	-	Yes	10-7/8	8	3-1/2

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Ring style units supplied with a snap type sealing ring.
- G-90 galvanized steel, NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessories pages.






Concentric Knockout	
LL	2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
VV	5/16

20 Ampere - Transformer Rated Meter Sockets

6, 7, 8 & 13 Jaw | W/WO Lever Bypass | Ring & Ringless Style | 600 VAC



R6821-13B

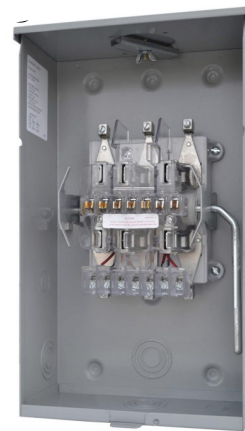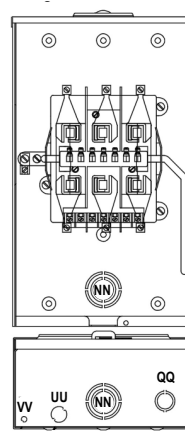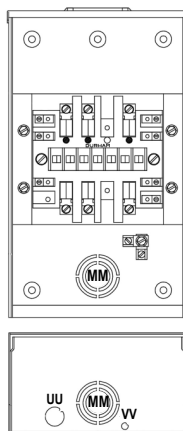

U6841-13C

RING STYLE							
Catalog Number	Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Dimensions		
					H"	W"	D"
R6821-7B	7	HO	X	-	14	8	4-23/64
R6821-7N-A	7	Solid	-	X	14	8	4-23/64
R6821-7N-B	7	HO	-	X	14	8	4-23/64
R6821-7N-C	7	HCP	-	X	14	8	4-23/64
R6821-8A	8	Solid	X	-	14	8	4-23/64
R6821-8B	8	HO	X	-	14	8	4-23/64
R6821-8C	8	HCP	X	-	14	8	4-23/64
R6821-8K	8	1" Hub	X	-	14	8	4-23/64
R6821-8N-B	8	HO	-	X	14	8	4-23/64
R6821-8N-L	8	1-1/4" Hub	-	X	14	8	4-23/64
R6821-13A	13	Solid	X	-	14	8	4-23/64
R6821-13B	13	HO	X	-	14	8	4-23/64
R6821-13C	13	HCP	X	-	14	8	4-23/64
R6821-13N-A	13	Solid	-	X	14	8	4-23/64
R6821-13N-B	13	HO	-	X	14	8	4-23/64
R6821-13N-C	13	HCP	-	X	14	8	4-23/64

RINGLESS STYLE							
Catalog Number	Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Dimensions		
					H"	W"	D"
6821-7C	7	HCP	X	-	14	8	4-23/64
6821-8C	8	HCP	X	-	14	8	4-23/64
U6821-13K	13	1" Hub	X	-	14	8	4-23/64

LEVER BYPASS							
Catalog Number	Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Dimensions		
					H"	W"	D"
U6841-6C	6	HCP	-	-	17	10	5
U6841-8C	8	HCP	-	-	17	10	5
U6841-13C	13	HCP	-	-	17	10	5

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Ring style units supplied with a snap type sealing ring.
- G-90 galvanized steel, NEMA 3R enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessories pages.





Concentric Knockout	
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
NN	1-1/2, 1-1/4, 1, 3/4
QQ	3/4, 1/2
UU	1/2
VV	5/16

20 Ampere - Transformer Rated Meter Sockets

5, 6 & 8 Jaw | Provisions For Test Switch | Ring & Ringless Style | 600 VAC



STS8-2C

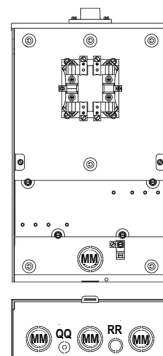

RSTL6-2K

RINGLESS STYLE									
Catalog Number		Jaws	Hub	1 Piece Cover	2 Piece Cover	Test Switch Bridge Height	Dimensions		
Steel	Aluminum						H"	W"	D"
STL5-2K	ASTL5-2K	5	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STS5-1B	ASTS5-1B	5	HO	Yes	-	Standard 13/16"	20	12	4-23/64
STS5-1C	ASTS5-1C	5	HCP	Yes	-	Standard 13/16"	20	12	4-23/64
STS5-2C	ASTS5-2C	5	HCP	-	Yes	Standard 13/16"	20	12	4-23/64
STL6-1K	ASTL6-1K	6	1" Hub	Yes	-	* Low 3/16"	20	12	4-23/64
STL6-2A	ASTL6-2A	6	Solid	-	Yes	* Low 3/16"	20	12	4-23/64
STL6-2B	ASTL6-2B	6	HO	-	Yes	* Low 3/16"	20	12	4-23/64
STL6-2K	ASTL6-2K	6	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STS6-1B	ASTS6-1B	6	HO	Yes	-	Standard 13/16"	20	12	4-23/64
STS6-1C	ASTS6-1C	6	HCP	Yes	-	Standard 13/16"	20	12	4-23/64
STS6-1K	ASTS6-1K	6	1" Hub	Yes	-	Standard 13/16"	20	12	4-23/64
STS6-2B	ASTS6-2B	6	HO	-	Yes	Standard 13/16"	20	12	4-23/64
STS6-2C	ASTS6-2C	6	HCP	-	Yes	Standard 13/16"	20	12	4-23/64
STH6-2B	ASTH6-2B	6	HO	-	Yes	High 1-3/8"	20	12	4-23/64
STL8-1K	ASTL8-1K	8	1" Hub	Yes	-	* Low 3/16"	20	12	4-23/64
STL8-2C	ASTL8-2C	8	HCP	-	Yes	* Low 3/16"	20	12	4-23/64
STL8-2K	ASTL8-2K	8	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STL8-2L	ASTL8-2L	8	1-1/4" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STS8-1B	ASTS8-1B	8	HO	Yes	-	Standard 13/16"	20	12	4-23/64
STS8-1C	ASTS8-1C	8	HCP	Yes	-	Standard 13/16"	20	12	4-23/64
STS8-1K	ASTS8-1K	8	1" Hub	Yes	-	Standard 13/16"	20	12	4-23/64
STS8-1L	ASTS8-1L	8	1-1/4" Hub	Yes	-	Standard 13/16"	20	12	4-23/64
STS8-2L	ASTS8-2L	8	1-1/4" Hub	-	Yes	Standard 13/16"	20	12	4-23/64
STS8-2B	ASTS8-2B	8	HO	-	Yes	Standard 13/16"	20	12	4-23/64
STS8-2C	ASTS8-2C	8	HCP	-	Yes	Standard 13/16"	20	12	4-23/64

RING STYLE									
Catalog Number		Jaws	Hub	1 Piece Cover	2 Piece Cover	Test Switch Bridge Height	Dimensions		
Steel	Aluminum						H"	W"	D"
RSTL5-2K	ARSTL5-2K	5	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
RSTL5-2L	ARSTL5-2L	5	1-1/4" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
RSTL6-2K	ARSTL6-2K	6	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
RSTL8-2K	ARSTL8-2K	8	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64

Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Units can be supplied with a Low (L=3/16"), standard (S=13/16") or high (H=1-3/8") test switch bridge.
- *Note test switch covers will only fit units with the low test switch bridge.
- Units supplied with (2) CU-AL ground connectors.
- Retained screws available for the 2-piece covers.
- Lever Bypass CT shorting block available.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available. Add prefix U for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.



Concentric Knockout	
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
QQ	3/4, 1/2
RR	1/2, 5/16

20 Ampere - Transformer Rated Meter Sockets

13 Jaw | Provisions For Test Switch | Ring & Ringless Style | 600 VAC



RSTL13-2K

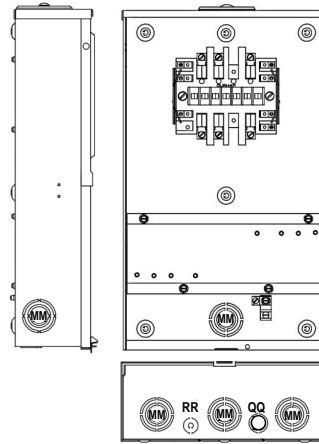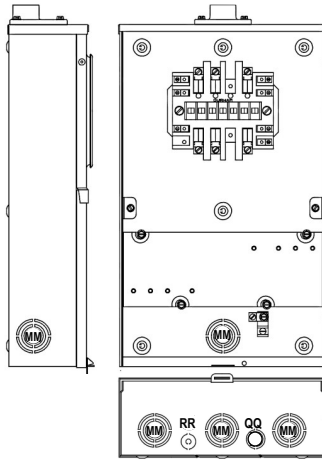

STS13-1C

RINGLESS STYLE									
Catalog Number		# Jaws	Hub	1 Piece Cover	2 Piece Cover	Test Switch Bridge Height	Dimensions		
Steel	Aluminum						H"	W"	D"
STL13-1A	ASTL13-1A	13	Solid	Yes	-	* Low 3/16"	20	12	4-23/64
STL13-1B	ASTL13-1B	13	HO	Yes	-	* Low 3/16"	20	12	4-23/64
STL13-1C	ASTL13-1C	13	HCP	Yes	-	* Low 3/16"	20	12	4-23/64
STL13-2A	ASTL13-2A	13	Solid	-	Yes	* Low 3/16"	20	12	4-23/64
STL13-2C	ASTL13-2C	13	HCP	-	Yes	* Low 3/16"	20	12	4-23/64
STL13-2K	ASTL13-2K	13	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STL13-2L	ASTL13-2L	13	1-1/4" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
STS13-1A	ASTS13-1A	13	Solid	Yes	-	Standard 13/16"	20	12	4-23/64
STS13-1B	ASTS13-1B	13	HO	Yes	-	Standard 13/16"	20	12	4-23/64
STS13-1C	ASTS13-1C	13	HCP	Yes	-	Standard 13/16"	20	12	4-23/64
STS13-1K	ASTS13-1K	13	1" Hub	Yes	-	Standard 13/16"	20	12	4-23/64
STS13-1L	ASTS13-1L	13	1-1/4" Hub	Yes	-	Standard 13/16"	20	12	4-23/64
STS13-2A	ASTS13-2A	13	Solid	-	Yes	Standard 13/16"	20	12	4-23/64
STS13-2B	ASTS13-2B	13	HO	-	Yes	Standard 13/16"	20	12	4-23/64
STS13-2C	ASTS13-2C	13	HCP	-	Yes	Standard 13/16"	20	12	4-23/64
STS13-2K	ASTS13-2K	13	1" Hub	Yes	Yes	-Standard 13/16"	20	12	4-23/64
STS13-2L	ASTS13-2L	13	1-1/4" Hub	-	Yes	Standard 13/16"	20	12	4-23/64

RING STYLE									
Catalog Number		# Jaws	Hub	1 Piece Cover	2 Piece Cover	Test Switch Bridge Height	Dimensions		
Steel	Aluminum						H"	W"	D"
RSTL13-2A	ARSTL13-2A	13	Solid	-	Yes	* Low 3/16"	20	12	4-23/64
RSTL13-2K	ARSTL13-2K	13	1" Hub	-	Yes	* Low 3/16"	20	12	4-23/64
RSTS13-2A	ARSTS13-2A	13	Solid	-	Yes	Standard 13/16"	20	12	4-23/64
RSTS13-2B	ARSTS13-2B	13	HO	-	Yes	Standard 13/16"	20	12	4-23/64
RSTS13-2K	ARSTS13-2K	13	1" Hub	-	Yes	Standard 13/16"	20	12	4-23/64
RSTS13-2L	ARSTS13-2L	13	1-1/4" Hub	-	Yes	Standard 13/16"	20	12	4-23/64
RSTS13-2N	ARSTS13-2N	13	2" Hub	-	Yes	Standard 13/16"	20	12	4-23/64


Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Units can be supplied with a Low (L=3/16"), standard (S=13/16") or high (H=1-3/8") test switch bridge.
- *Note test switch covers will only fit units with the low test switch bridge.
- Units supplied with (2) CU-AL ground connectors.
- Retained screws available for the 2-piece covers.
- Lever bypass CT shorting block available.
- NEMA 3R enclosures, UL (Underwriters Laboratories) label available. Add prefix U for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.

Concentric Knockout	
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
QQ	3/4, 1/2
RR	1/2, 5/16

20 Ampere - Transformer Rated Meter Sockets


5, 6, 7, 8, 13 & 15 Jaw | Pre-Wired With Test Switch | Ring & Ringless Style | 600 VAC

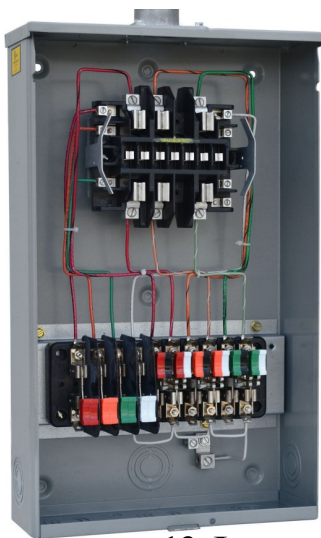


**13-Jaw
1-Piece Cover-Reverse Potentials**



**13-Jaw
2-Piece Cover**

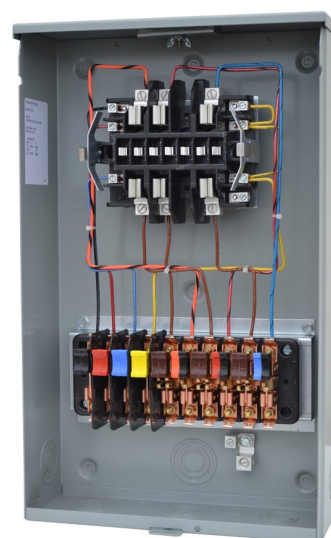


**13-Jaw
1-Piece Cover**

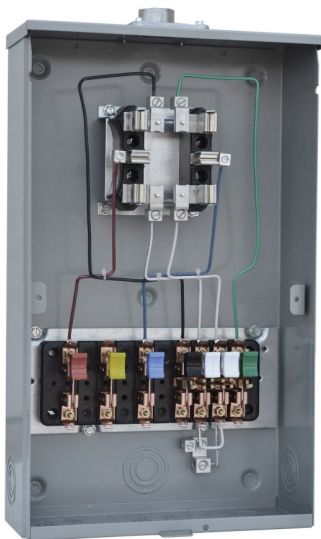

**6-Jaw
2-Piece Cover**



**8-Jaw
2-Piece Cover**

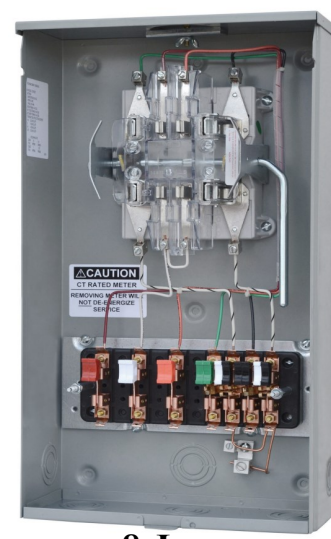

**8-Jaw
1-Piece Cover-Lever Bypass**

Transformer Rated Meter Socket Options Available

- UL Label, NEMA 3R Enclosures.
 - G-90 Galvanized Steel or Aluminum Enclosures.
 - 1 or 2-Piece Covers, Ring or Ringless Meter Opening. Retained Cover Screws Available for 2-Piece Covers.
 - 1", 1-1/4", 1-1/2" Hub, Hub Cover Plate or Solid Top.
 - Test Switch Handle Colors can Match Wire Colors.
 - Split Test Switch Handle Colors can Match Wire Colors with Tracer Colors.
 - Reverse Test Switch Voltage Switches Available for Safety.
 - Test Switch Box Connectors Available.
 - Standard Snap-In Test Switch Barriers or Bolt-In Channel Barriers.
 - Pre-Wired Sockets Using #12 or #10 Stranded or Solid Wire.
 - Standard Copper or Plated Test Switches.
 - Order with Clear Lexan Cover, Black Lexan Cover or without Cover.
 - Standard 13/16", Low 3/16" or High 1-3/8" Test Switch Bridge.
- *Please see Socket Selector on page 45 to submit a quote.**

OPTI-Form Enclosure - Choose The Enclosure That Fits Your Installation.

Order Opti-Form Panel Separately, See Page 38.



Optional Prefixes:

A = Aluminum Enclosure.

B = Barrel Lock Design - Without Provisions For Lock Head Protector (7/16 In. Diameter Knockout In Cover And Lock Plate In Enclosure Wall).

D = Barrel Lock Design - With Provisions For Inner-Tite Lock Head Protector (7/8 In. Diameter Knockout In Cover Without Lock Plate In Enclosure Wall).

E = Barrel Lock Design - With Provisions For Brooks Lock Head Protector And Bracket (7/8 In. Diameter Knockout In Cover Without Lock Plate In Enclosure Wall).


F = Flush Type Barrel Lock Design - With Provisions For Brooks Lock Head Protector (7/8 In. Diameter Knockout In Cover And Locking Plate In Enclosure Wall).

R = Signifies "Ring" Style Opening In Cover.

Enclosure:

Example: Cat#

SP - 2 C XXXX
1 2 3

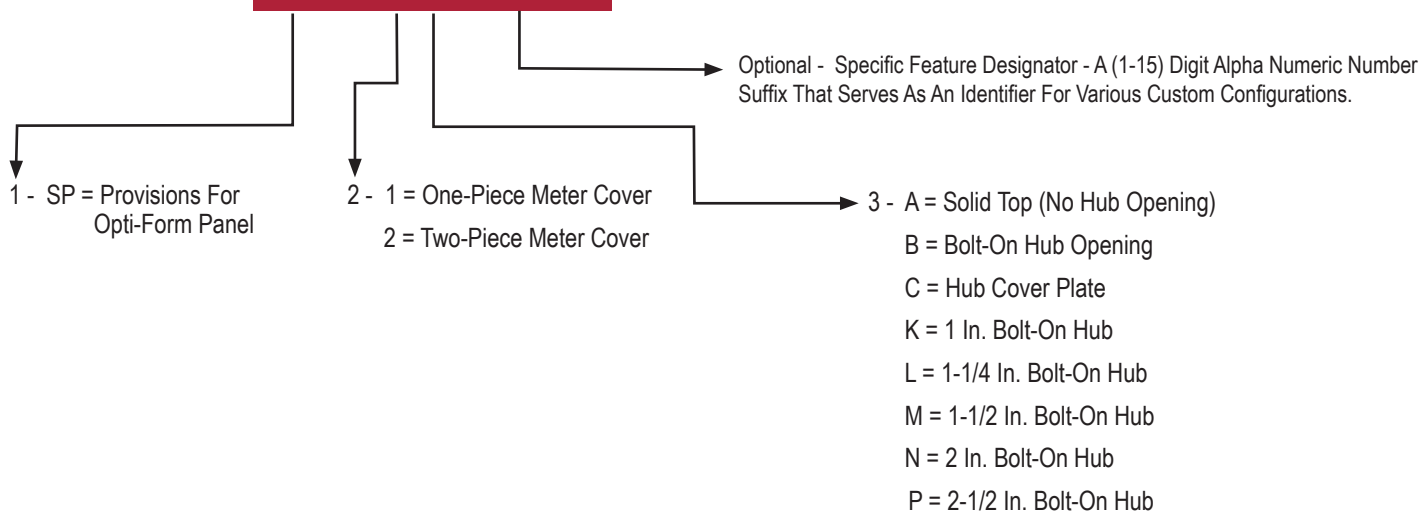


Available with the following options:

- Galvanized Steel or Aluminum
- 1 or 2 Piece Front Cover
- Ring or Ringless Meter Opening
- Hub Cover Plate, Hub Opening or Hub

OPTI-Form Pre-Wired Panel - Select The Panel Configuration That Meets Your Application.

Order The Opti-Form Enclosure Separately, See Page 37.

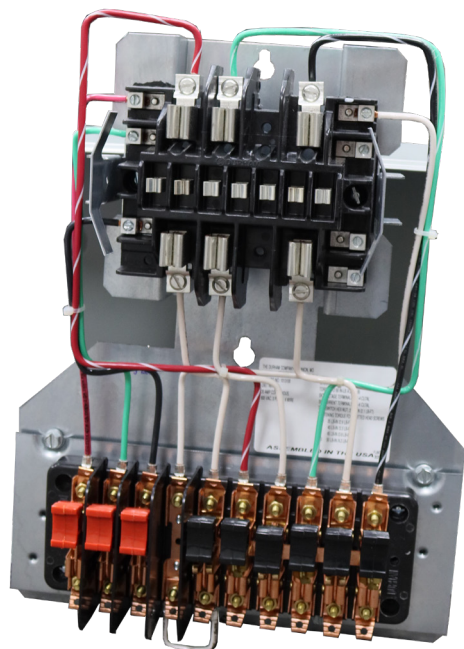

20 AMP | 5, 6, 7, 8, 13 & 15 Jaw |
Ring & Ringless | 600 VAC



Panel:
Example: Cat#

PS 13 – XXXX
1 2 3

1 - P = Opti-Form
Panel


2 - L = "Low" - 1/4 In. High Test Switch Plate
S = "Standard" - 1 In. High Test Switch Plate
H = "High" - 1-1/2 In. High Test Switch Plate

Optional - Specific Feature Designator
- A (1-15) Digit Alpha Numeric Number
Suffix That Serves As An Identifier For
Various Custom Configurations.

3 - Number Of Socket Terminals
(Indicated By Numbers 5-15)

Several Test Switch Options Available


Please see pages 45-47 for Test Switch Options
and Selector Form.

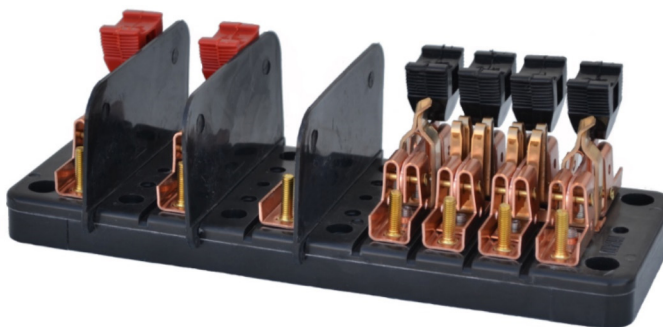


- Removable meter mounting plate designed for easy wiring of multiple meter forms.
- *Optional Ring style available add "R" prefix.
- Solid or Stranded #12 or #10 Wire
- 9 Test Switch Handle colors available (Handles can have split colors to match wire)
- Any Test Switch Pole Arrangement
- Durham Test Switches can be standard Copper, Tin or Nickel Plated
- Clear Lexan or Black Fiberglass Test Switch Covers available

The Isolator


Keeps 277/480 Volts Isolated From The Meter Socket

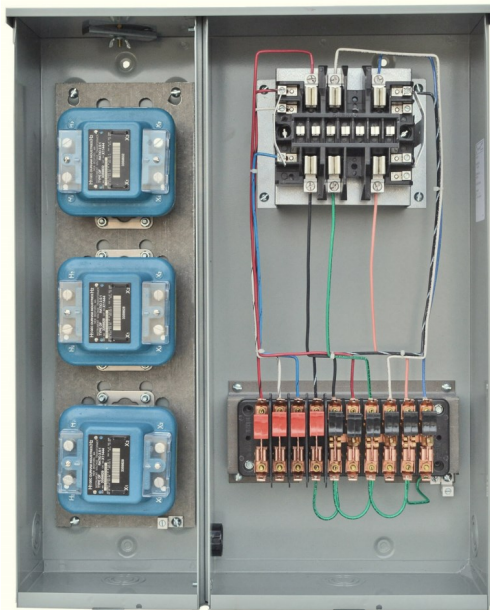


Overhead/Underground Service

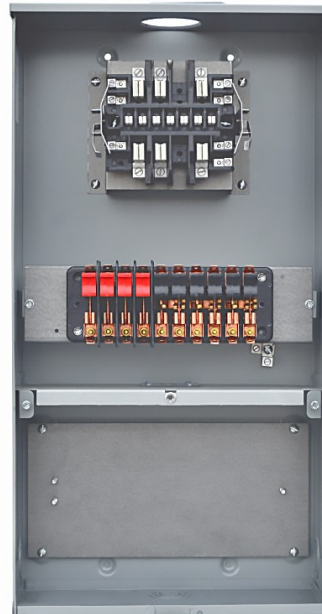

**Provisions For VT Pack
Below The Meter Socket**

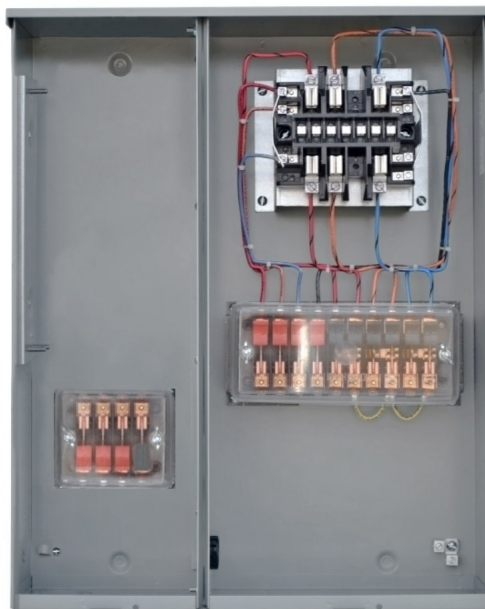


**Underground Service
Provisions For VT Pack**

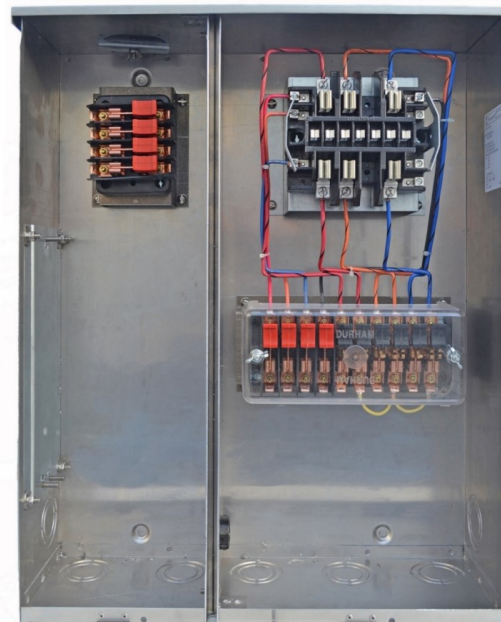

**Aluminum
Overhead/Underground Service**

- Enclosures Isolates 277/480 Volts from the Meter Socket
- Enclosures come with the VT's or have provisions for the VT's
- Enclosures can be Pre-Wired with Test Switch with Stranded or Solid Wire
- Enclosures are Manufactured in G-90 Galvanized Steel or Aluminum
- NEMA 3R Enclosures

A-Base Enclosures

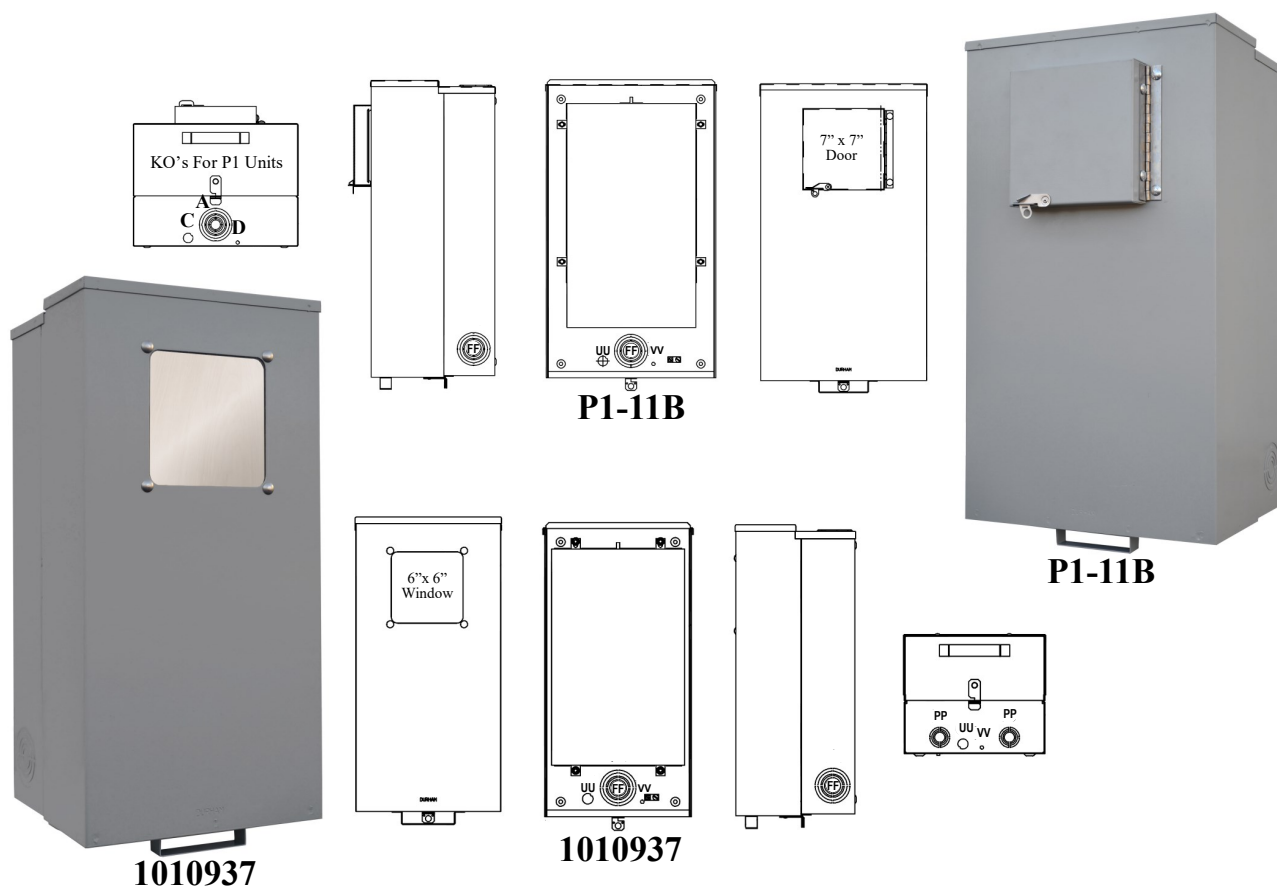

A BASE ENCLOSURE 1 POSITION						
Catalog Number	Hub	Dimensions			Plywood Board Size	
		H"	W"	D"	Height	Width
*1010937	HO	24-23/32	12	10	18	11
P1-10A	Solid	26-27/32	11	11	20	7-1/2
P1-10B	HO	26-27/32	11	11	20	7-1/2
P1-10C	HCP	26-27/32	11	11	20	7-1/2
P1-10K	1" Hub	26-27/32	11	11	20	7-1/2
P1-10L	1-1/4" Hub	26-27/32	11	11	20	7-1/2
P1-11A	Solid	26-27/32	15	11	20	11-1/2
P1-11B	HO	26-27/32	15	11	20	11-1/2
P1-11C	HCP	26-27/32	15	11	20	11-1/2
P1-11K	1" Hub	26-27/32	15	11	20	11-1/2
P1-11L	1-1/4" Hub	26-27/32	15	11	20	11-1/2

	Hub	Dimensions			Plywood Board Size	
		H"	W"	D"	Height	Width
*P2-20A	Solid	30-1/8	27	11	23-1/2	24
*P2-20B	HO	30-1/8	27	11	23-1/2	24
*P2-20C	HCP	30-1/8	27	11	23-1/2	24
*P2-20K	1" Hub	30-1/8	27	11	23-1/2	24
*P2-20L	1-1/4" Hub	30-1/8	27	11	23-1/2	24

Hub / Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Units supplied with 3/4" BB grade treated plywood.
- Units supplied with #14-2 CU-AL ground connector.
- G-90 galvanized steel, NEMA 3R enclosures.
- *Unit supplied with clear lexan viewing window instead of hinged door.
- 1010937 window replacement kit part number is ARP01909.

Concentric Knockout	
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
PP	1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Transformer Rated - Transockets

600 VAC | 200 Through 4,000 Ampere | Single & Three Phase | Pre-Wired

Saving Utilities On Installation Time!

Pre-Wired Transformer Rated Transockets have wiring harness that are color coded and wired per utility specifications.


- Very Low Secondary Burden Rating
- Manufactured from G-90 Galvanized Steel or Aluminum
- Stainless Steel Exterior Hardware
- NEMA 3R Enclosures



200 Amp




400 Amp

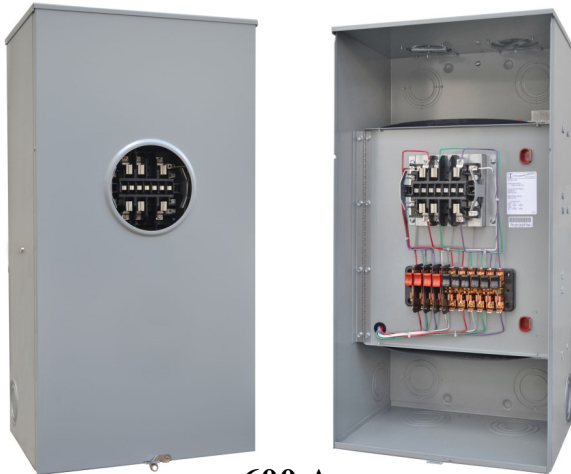

600 Amp



800 Amp

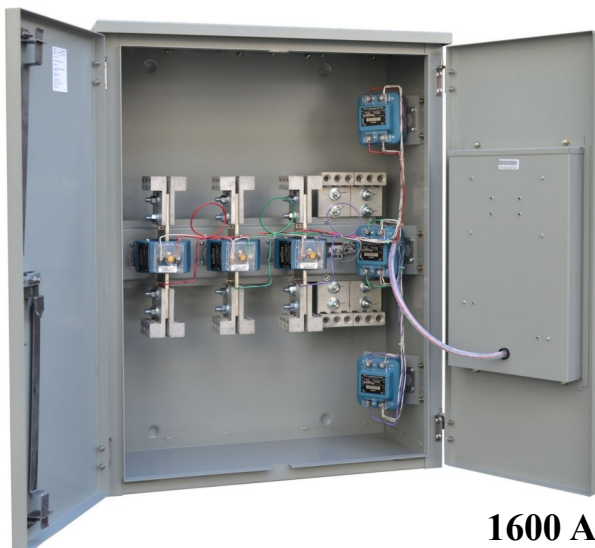


1600 Amp




Transformer Rated - Transockets - High Accuracy

600 VAC | 600 Ampere | Single & Three Phase | 6 & 13 Jaw | Ringless Style

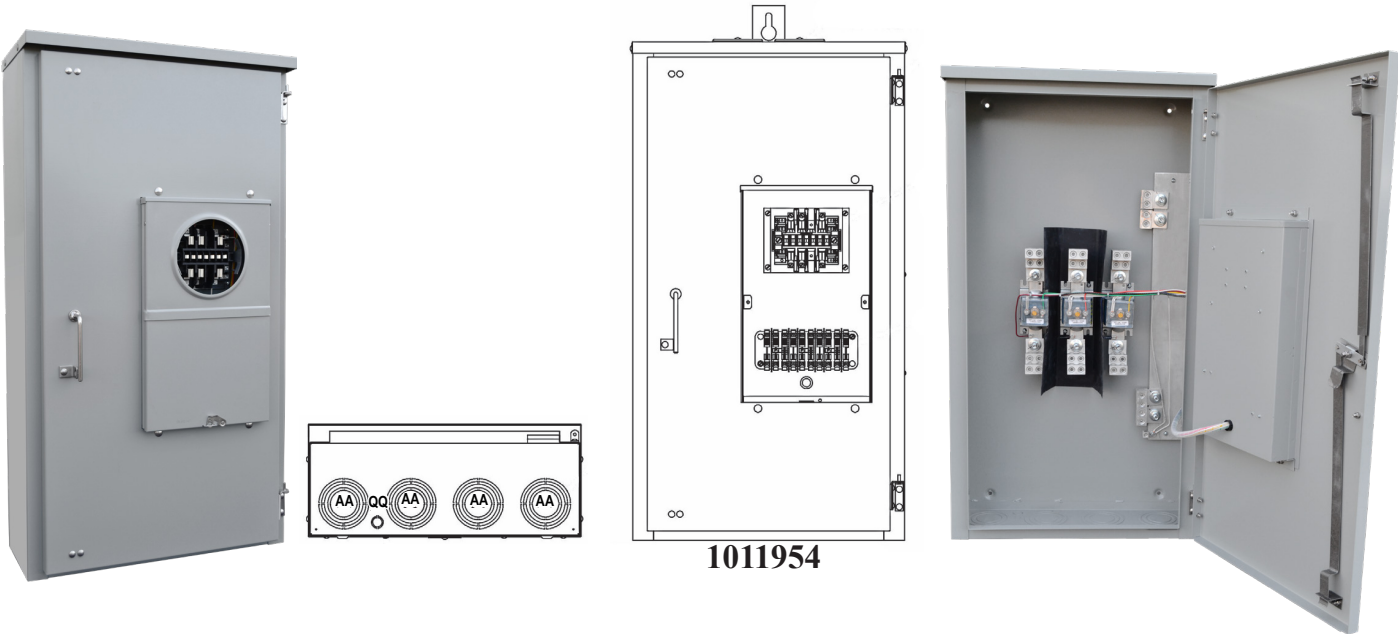

1011954

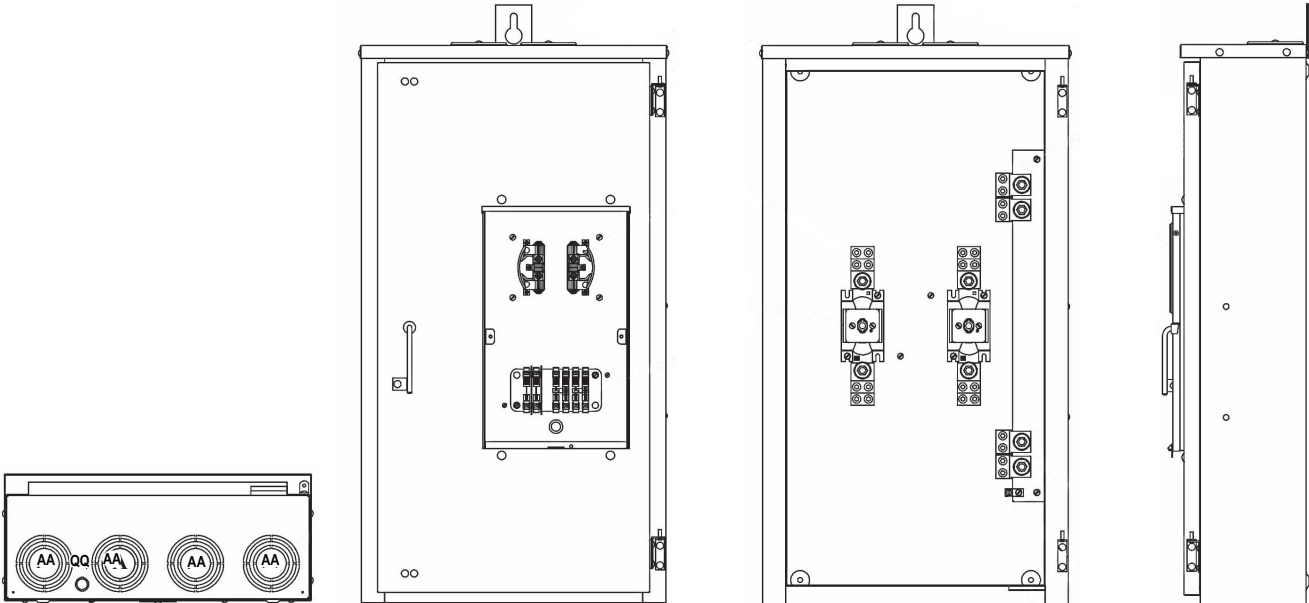

1011955

Catalog Number	Amps	Phase	High Accuracy .15% Current Transformers	# Jaws	Hub	Wire Size CU-AL		Dimensions		
						Line	Load	H"	W"	D"
1011955	600	1	(2) 600:5	6	(2) HCP (LG)	(4) #6-350	(4) #6-350	46	25	8-1/2
1011954	600	3	(3) 600:5	13	(2) HCP (LG)	(4) #6-350	(4) #6-350	46	25	8-1/2


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Pre-wired per customer specifications.
- 600 Amperes, 1 phase, 3-wire - 3 phase, 4-wire.
- 600:5 .15S Accurate Transformers with RF of 1.33 @ 30C.
- Overhead/Underground Feed.
- (2) Large hub cover plates on top.
- G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
AA	4, 3-1/2, 3, 2-1/2, 2
QQ	3/4, 1/2

Transformer Rated - Transockets

600 VAC | 400 Ampere | Single Phase | 3-Wire | Form 3S | 5-Jaw | Ring Style

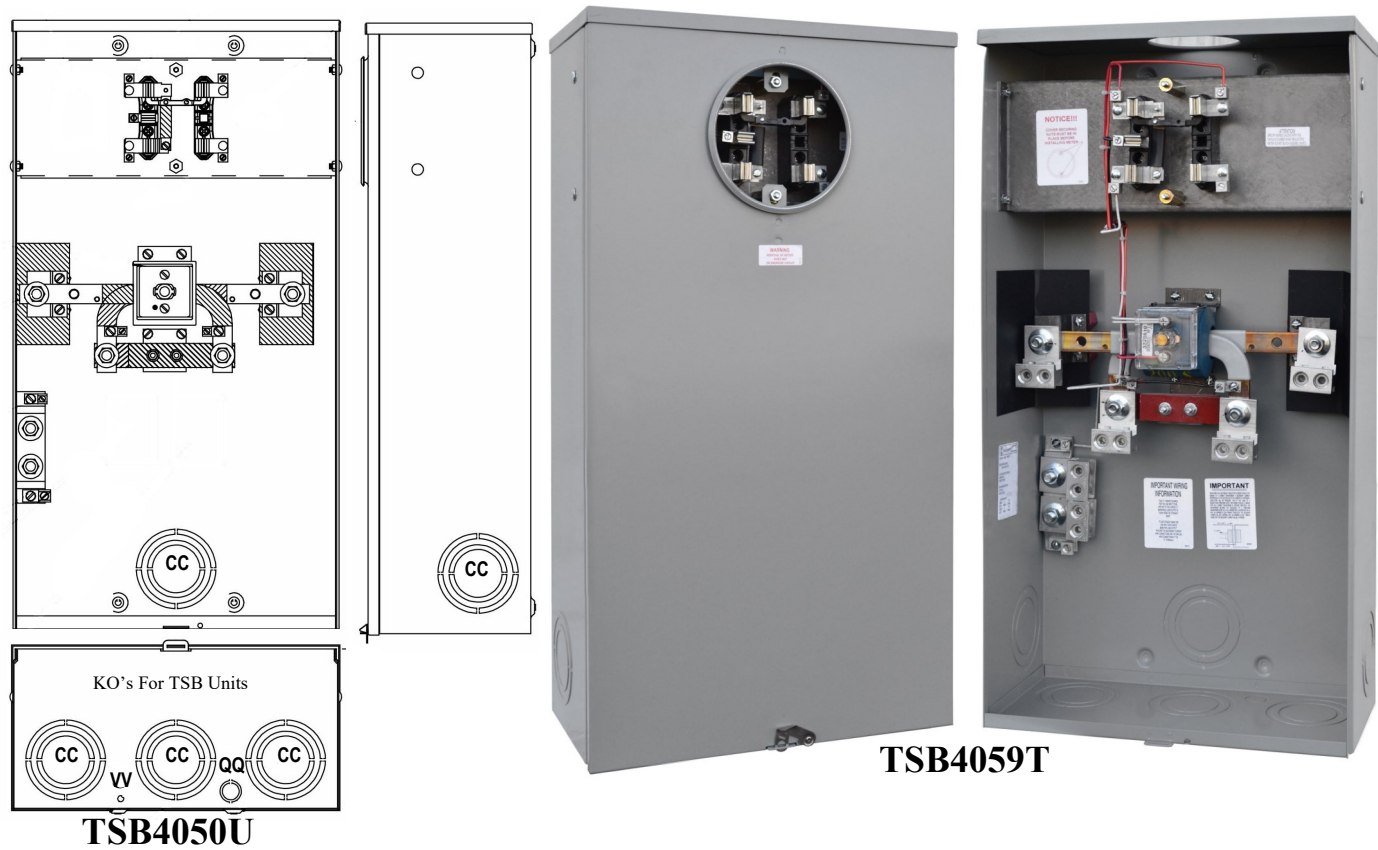

RING STYLE											
Catalog Number	Amps	Current Transformers	# Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Wire Size CU-AL		Dimensions		
							Line	Load	H"	W"	D"
TSB4050A	400	200 & 200:5	5	Solid	Yes	-	1/2" Stud	1/2" Stud	31-1/2	16-3/4	8-15/64
TSB4050S	400	200 & 200:5	5	4" Hub	Yes	-	1/2" Stud	1/2" Stud	31-1/2	16-3/4	8-15/64
TSB4050U	400	200 & 200:5	5	HCP (LG)	Yes	-	1/2" Stud	1/2" Stud	31-1/2	16-3/4	8-15/64
TSB4059A	400	200 & 200:5	5	Solid	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
TSB4059Q	400	200 & 200:5	5	3" Hub	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
TSB4059T	400	200 & 200:5	5	HO (LG)	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
TSB4059U	400	200 & 200:5	5	HCP (LG)	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
*TSB4059V	400	200 & 200:5	5	2-1/2" Hub	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
*TSB4059W	400	200 & 200:5	5	2" Hub	Yes	-	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
TSBN4050A	400	200 & 200:5	5	Solid	-	Yes	1/2" Stud	1/2" Stud	31-1/2	16-3/4	8-15/64
TSBN4050S	400	200 & 200:5	5	4" Hub	-	Yes	1/2" Stud	1/2" Stud	31-1/2	16-3/4	8-15/64
TSBN4059A	400	200 & 200:5	5	Solid	-	Yes	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64
TSBN4059U	400	200 & 200:5	5	HCP (LG)	-	Yes	(2) #6-350	(2) #6-350	31-1/2	16-3/4	8-15/64



Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- 400 ampere, 1 phase, 3-wire, form 3S.
- Units supplied with (1) 400:5 double pass window current transformer which equals 200 & 200:5.
- *Unit supplied with large hub opening with hub reducer plate with designated small hub.
- G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
QQ	3/4, 1/2
VV	5/16

Transformer Rated - Transockets

600 VAC | 400 Ampere | Single & Three Phase | 6, 7, 8, & 13 Jaw | Ringless Style

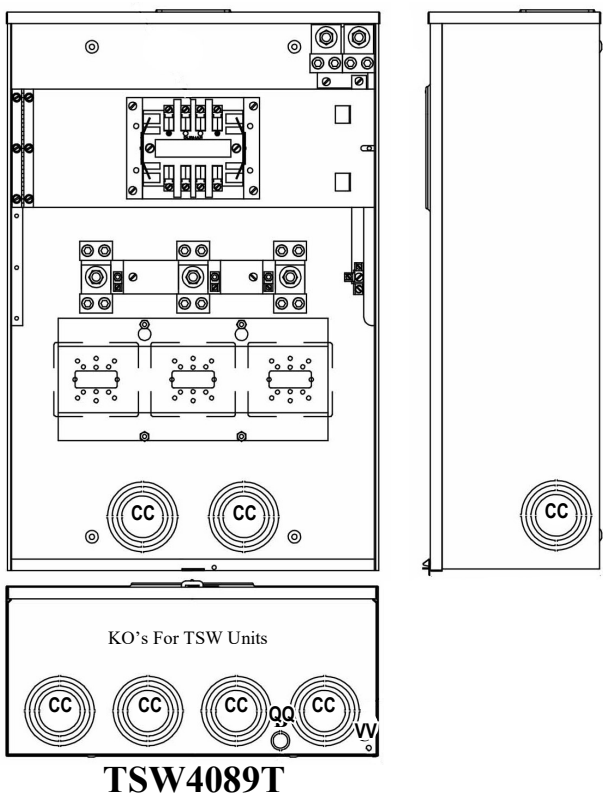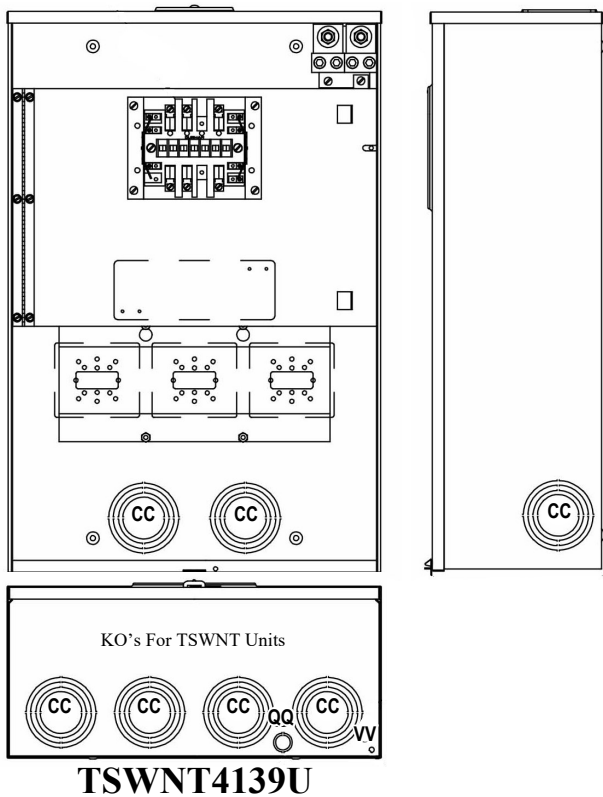

RING STYLE														
Catalog Number	Amps	Provisions For 3 Current Transformers	# Jaws	Hub	Auto Circuit Closing	Non Circuit Closing	Wire Size CU-AL		Dimensions			Knockouts		
							Line	Load	H"	W"	D"	A	B	C
TSW4069A	400	Yes	6	Solid	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4069T	400	Yes	6	HO (LG)	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4069U	400	Yes	6	HCP (LG)	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4079A	400	Yes	7	Solid	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4089A	400	Yes	8	Solid	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4089T	400	Yes	8	HO (LG)	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4139S	400	Yes	13	4" Hub	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4139T	400	Yes	13	HO (LG)	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
TSW4139U	400	Yes	13	HCP (LG)	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
*TSW4139V	400	Yes	13	2-1/2" Hub	Yes	-	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
**TSWNT4069U	400	Yes	6	HCP (LG)	-	Yes	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
**TSWNT4139A	400	Yes	13	Solid	-	Yes	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16
**TSWNT4139U	400	Yes	13	Solid	-	Yes	(2) #6-350	(2) #6-350	33	22	10	3-1/2	3/4	5/16


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- 400 ampere, 1 phase, 3-wire - 3 phase, 4-wire.
- Units supplied with provisions for mounting (3) intermediate size window-type current transformers.
- *Unit supplied with large hub opening with hub reducer plate with small 2-1/2" hub.
- ** Units supplied with provisions for mounting test switch with 7 or 10 pole base.
- G-90 galvanized steel.
- NEMA 3R enclosures




Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
QQ	3/4, 1/2
VV	5/16

Transformer Rated - Pad Mount - Transockets

1200 Ampere | With Metering | Three Phase | Multiple Connections | 600 VAC

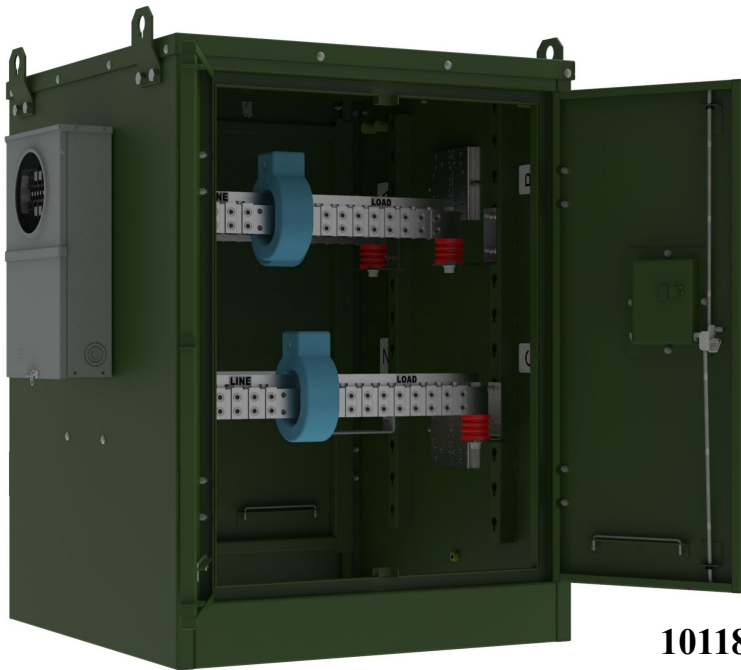

1011841

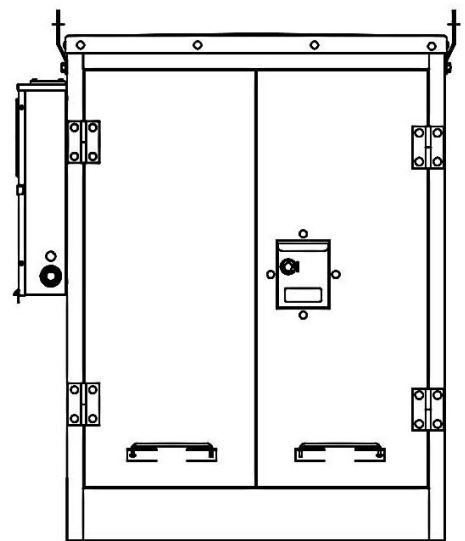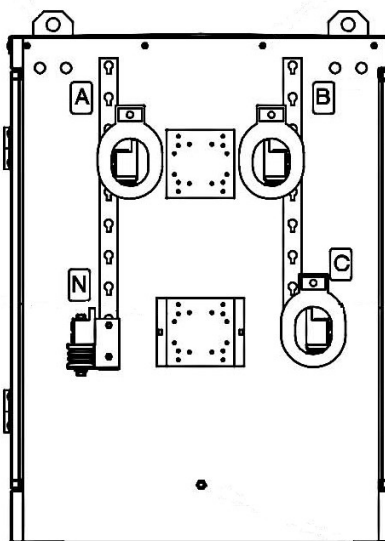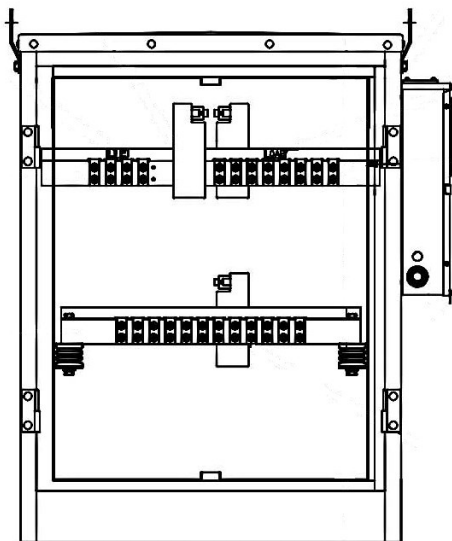

- 1200 Ampere, 3 Phase, 4-Wire, 600 Volts.
- Units Up To 4,000 Amperes Available.
- IEEE C57.27.28.
- (3) 12-Position 1/0-750 MCM CU-AL Tin-Plated Phase Bus Connectors.
- (1) 12-Position 1/0-750 MCM CU-AL Tin-Plated Neutral Bus Connectors.
- (3) Astra AP4Y 400:5 B. 0.2, RF 4 @ 85C Extended Range Pad Mount Current Transformers.
- 13 Terminal Pre-Wired 9S Meter Socket with 10 Pole Test Switch.
- Munsell 7GY3.29/1.5 Pad Mount Green Ultra Weatherable Polyester Powder Paint Finish.
- 12 Ga. G-90 Galvanized Steel.
- Stainless Steel Hardware.
- Line And Load Labels (3) Places.

Transformer Rated | Transocket Ordering Guide

200 Through 1600 Ampere | Single & Three Phase | Pre-Wired

Pre-Wired Transformer Rated Transockets Saves The Utility Installation Time

Single Or Three Phase

200 Through 1600 Amps

Units Have A Very Low Secondary Burden Rating

Wiring Harness Is Color Coded And Wired Per Utility Specifications

Units Manufactured From G-90 Galvanized Steel Or Aluminum

Stainless Steel Exterior Hardware

NEMA 3R Enclosures

Transocket Ordering Guide

Customer /AgentName:

City:

State:

Phone Number:

Email

Single Phase	Current Transformers (If Applicable)		
Three Phase	CT Ratio	Burden	
Meter Form	CT Rating Factor		
# Jaws	Window CT's		
Amperage	Bar CT's		
Voltage	Connectors		
Ring Style Front	Connector Size		
Ringless Style Front	Bar CT Connectors		
Test Switch Required	Single	Dual	Other
Auto Circuit Closing Block	Voltage Transformers (If Applicable)		
Lever Bypass Block	VT Ratio		
Overhead Service	VT Volt Amp Rating		
Underground Service	Notes:		
Overhead/underground Service			
G-90 Galvanized Steel Enclosure			
Aluminum Enclosure			




10 Pole Front Connect




10 Pole Back Connect



6 Pole Compact Switch

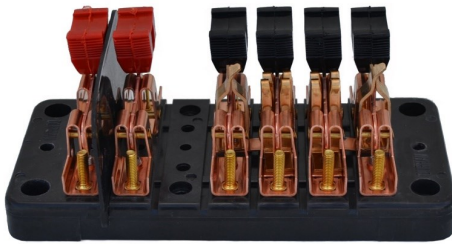

6 Pole

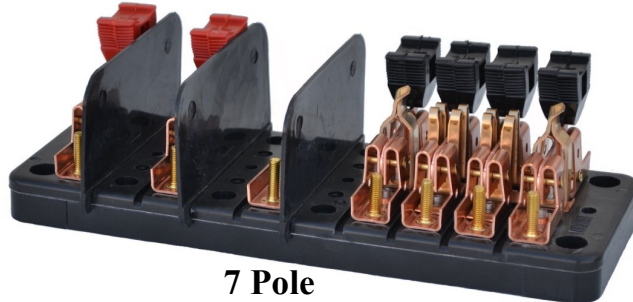

7 Pole

- Underwriters Laboratories (UL) available on most Test Switches.
- Test Switches are built to ANSI C12.9 standards.
- Test Switches are rated for 30 Ampere at 600 Volts AC.

Blades: Copper knife blades provide superior contacts. Blades can be supplied with 45 or 90 degree stops.

Bases: Glass filled polyester (molded) bases are supplied on standard spacing models. Arboron cut bases are supplied for special larger mounting requirements. Bases offer nontracking, 600 Volt, high strength and superior longevity. Customer provisions are supplied for 1/4" mounting bolts.

Test Jack Switch: Copper components provide excellent low resistance for the insertion of a bi-polar plug (Safe-T Plug) to measure current in the circuit.

Short Circuit Switch: Copper components with a make before break design for shorting out the current transformer.

Neutral Switch: Neutrals can be as a switch or solid thru-bar.

Handles: Nylon (2) piece ultra-sonic welded handles can be supplied in 9 colors to match the wire color. Split handle colors can be supplied to match the wire and tracer color.

Ganged Handles: Handles can be supplied ganged together.

Barriers: Insulated pop-in barriers are furnished on all potential assemblies having 1" or less spacing to next switch element. Channel Barriers are available.

Test Ears: Test Ears are supplied as standard with the stud/nut connections. The ears are corrugated for secure clamping of test leads.

Connections: Front and Back Connected Test Switches are furnished with 10/32 studs with brass hex nuts (3/8" across flats) as standard.

Plating: Test Switches are supplied in bare copper as standard. Plating is available.

Reverse Potentials: Potential Switches can be reversed for additional safety when metering 277/480 Volts.

Connectors: Box Style Connectors are available.


Covers: Covers are available in Clear or Black Lexan. Covers are supplied with mounting studs and wing nuts with provisions for wire seals.

Captive Cover Screws: Covers are available with captive thumb wheel screws.

Current Safety Plugs: Optional Safe-T-Plugs are available to allow current measurements in the Test Jack Switches.

Fuse Holders: 30 or 60 Amp Fuse Holders are available.

Bases

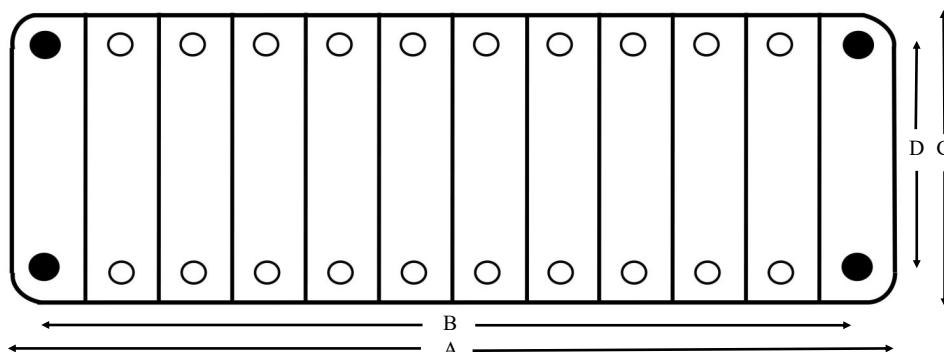

Glass Filled Polyester Bases



Molded Test Switch Base Dimensions

#Poles	Fig. A	Fig. B	Fig. C	Fig. D
4	4-5/8"	3-5/8"	3-1/2"	2-1/2"
7	7-1/2"	6-1/2"	3-1/2"	2-1/2"
10	9-1/2"	8-1/2"	3-1/2"	2-1/2"
12	11-1/2"	10-1/2"	3-1/2"	2-1/2"



Black Lexan Cover Cat.# 7943 FC



Clear Lexan Cover Cat.# 7943 FC-CL

Test Switch Cover Catalog Numbers

Base	Base Size	Front Connect Switch		Back Connect Switch	
		Clear Lexan	Black Lexan	Clear Lexan	Black Lexan
4 Pole	4-5/8"	7941 FC-CL	7941 FC	7941 BC-CL	7941 BC
7 Pole	7-1/2"	7942 FC-CL	7942 FC	7942 BC-CL	7942 BC
10 Pole	9-1/2"	7943 FC-CL	7943 FC	7943 BC-CL	7943 BC
12 Pole	11-1/2"	7944 FC-CL	7944 FC	7944 BC-CL	7944 BC

Optional Test Switch Connectors



(CU) #6-18 Wire Range
(Test Ears Can Be Added)



(AL) #2-14 Wire Range
(Test Ears Can Not Be Added)



(AL) #2-14 Wire Range
(Tall Screw Used As Test Ear)

Test Switch Poles

Potential/Neutral Switch	Reverse Potential Switch (Safety Feature For 277/480 Volts)	C+ Current Shorting Switch	C- Current Return Test Jack Switch	Neutral Thru-Bar
---------------------------------	--	-----------------------------------	---	-------------------------



Standard Pop-In Barrier



Channel Barrier



L-End Barrier

Handle Color Chart	
Black	Brown
Red	Gray
White	Orange
Yellow	Purple
Blue	Green

Split Handle Colors Available



Test Jack Safe-T Plug
Catalog # 3614B-00

Transformer Rated

Meter Socket/Test Switch Selector

Pre-Wired Socket/Test Switch Selector - QUOTE REQUEST

Customer /AgentName: City: State:

Phone Number: Email

Notes

UL ☐ Yes Label: ☐ No	Meter ☐ 1 Piece Cover: ☐ 2 Piece	Meter Form:	Wire Type: #12 Stranded #10 Stranded #12 Solid #10 Solid	Wire & Test Handle Options: Black White Red Yellow Blue Brown Gray Orange Purple Green
Enclosure:	Meter Opening:	Hub Options:	Wire Tracer Options: Black White	

P = Potential Voltage

Pr = Reverse Potential

Pn = Potential Neutral

Switch Element Options for Pole Assembly

C+ = Current Shorting Switch

C- = Current Return Test Jack

N = Neutral Solid

Connector Options

(CU) #6-18 Wire Range
(Test Ear Can be added)



(AL) #2-14 Wire Range
(Test Ear Can not be added)



(AL) #6-14 Wire Range
(Tall Screw used as Test Ear)




Pole #	Wire Type:	Wire Color:	Wire Stripe:	Pole Options:	Connectors Options:
Pole # 1	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 2	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 3	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 4	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 5	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 6	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 7	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 8	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 9	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 10	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 11	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel
Pole # 12	Left Handle:	Right Handle:	Barrier: Left of Pole	Right of Pole	Standard Channel

Test Switch
Plating:

Please fill out Transocket Guide on Page 46.

Current Transformer Enclosures - RD Series


Single Right Hinged Door With Plywood Back Or Rails

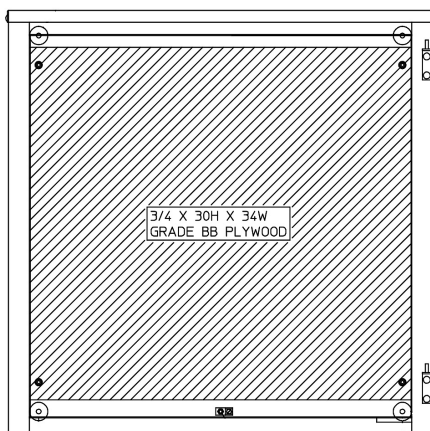

363612-RDW



363612-RDW

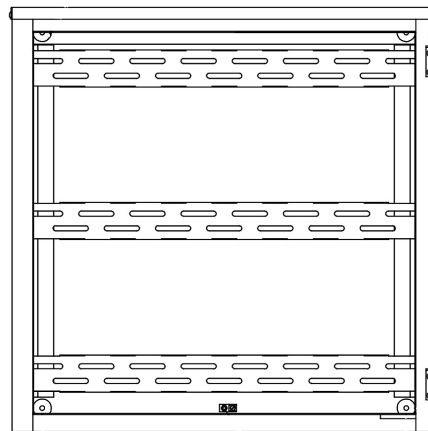

363612-RDR

Single Right Hand Swing Door (RD) Series G-90 Galvanized Steel Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
302410-RDW	24H X 22W	302410-RDR	3	30	24	10	16 GA
302412-RDW	24H X 22W	302412-RDR	3	30	24	12	16 GA
303012-RDW	24H X 28W	303012-RDR	3	30	30	12	16 GA
303016-RDW	24H X 28W	303016-RDR	3	30	30	16	16 GA
303612-RDW	24H X 34W	303612-RDR	3	30	36	12	14 GA
343614-RDW	28H X 34W	343614-RDR	3	34	36	14	14 GA
363012-RDW	30H X 28W	363012-RDR	3	36	30	12	14 GA
363612-RDW	30H X 34W	363612-RDR	3	36	36	12	14 GA
423612-RDW	36H X 34W	423612-RDR	4	42	36	12	14 GA

Single Right Hand Swing Door (RD) Series Aluminum Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
A-302410-RDW	24H X 22W	A-302410-RDR	3	30	24	10	0.080
A-302412-RDW	24H X 22W	A-302412-RDR	3	30	24	12	0.080
A-303012-RDW	24H X 28W	A-303012-RDR	3	30	30	12	0.080
A-303016-RDW	24H X 28W	A-303016-RDR	3	30	30	16	0.080
A-303612-RDW	24H X 34W	A-303612-RDR	3	30	36	12	0.100
A-343614-RDW	28H X 34W	A-343614-RDR	3	34	36	14	0.100
A-363012-RDW	30H X 28W	A-363012-RDR	3	36	30	12	0.100
A-363612-RDW	30H X 34W	A-363612-RDR	3	36	36	12	0.100
A-423612-RDW	36H X 34W	A-423612-RDR	4	42	36	12	0.100

Contact representative or factory for other cabinet sizes not listed.

- All external hardware and hinges are stainless steel.
- Supplied with 3-point latch with stainless steel pad lockable handle.
- Supplied with #14-2/0 ground connector.
- G-90 galvanized steel or aluminum enclosures, NEMA 3R enclosures.

Pole Mounting Brackets Kits

Aluminum — ARP00927—for units 24"-35" wide

ARP00929—for units 36"-48" wide

G-90 Steel — ARP00926—for units 24"-35" wide

ARP00928—for units 36"-48" wide

(Brackets includes hardware kit)

Pole Mount Bracket Hardware Kit


(2) Pole mount hanger brackets

(4) UU 5/16-18 x 3/4" carriage bolts

(4) UU 5/16 lock washers


(4) 5/16-18 hex nuts

Optional Pole Mounting Brackets
2 Brackets Per Kit, Mounting Hardware Included

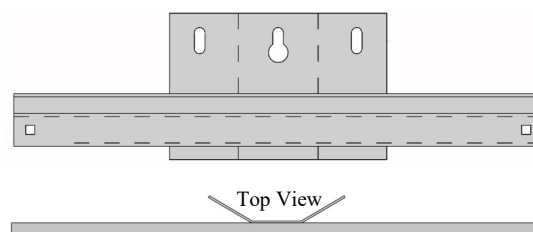

Current Transformer Enclosures - SF SERIES


Single Lift Off Door With Plywood Back Or Rails

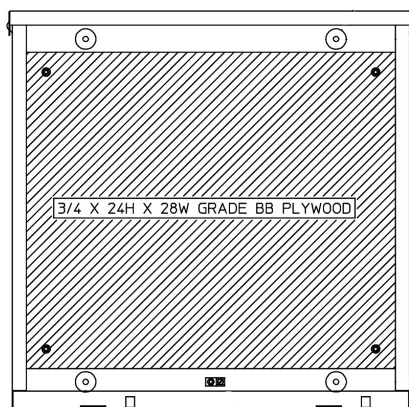

363612-SFW



363612-SFW

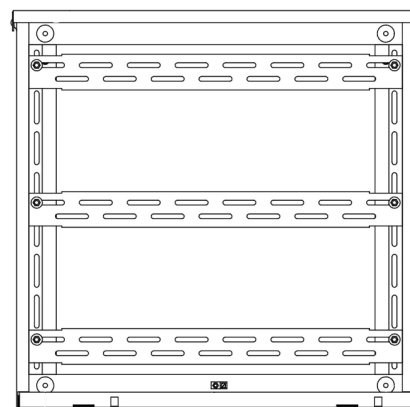

363612-SFR

Single Lift Off Door (SF) Series G-90 Galvanized Steel Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
242410-SFW	18H X 22W	242410-SFR	2	24	24	10	16 GA
242412-SFW	18H X 22W	242412-SFR	2	24	24	12	16 GA
243012-SFW	18H X 28W	243012-SFR	2	24	30	12	16 GA
302412-SFW	24H X 22W	302412-SFR	3	30	24	12	16 GA
303012-SFW	24H X 28W	303012-SFR	3	30	30	12	16 GA
303612-SFW	24H X 34W	303612-SFR	3	30	36	12	14 GA
363012-SFW	30H X 28W	363012-SFR	3	36	30	12	14 GA
363612-SFW	30H X 34W	363612-SFR	3	36	36	12	14 GA
424212-SFW	36H X 40W	424212-SFR	4	42	42	12	14 GA
424812-SFW	36H X 46W	424812-SFR	4	42	48	12	14 GA
484212-SFW	42H X 40W	484212-SFR	4	48	42	12	14 GA
484812-SFW	42H X 46W	484812-SFR	4	48	48	12	14 GA

Single Lift Off Door (SF) Series Aluminum Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
A-242410-SFW	18H X 22W	A-242410-SFR	2	24	24	10	0.080
A-242412-SFW	18H X 22W	A-242412-SFR	2	24	24	12	0.080
A-243012-SFW	18H X 28W	A-243012-SFR	2	24	30	12	0.080
A-302412-SFW	24H X 22W	A-302412-SFR	3	30	24	12	0.080
A-303012-SFW	24H X 28W	A-303012-SFR	3	30	30	12	0.080
A-303612-SFW	24H X 34W	A-303612-SFR	3	30	36	12	0.100
A-363012-SFW	24H X 28W	A-363012-SFR	3	36	30	12	0.100
A-363612-SFW	30H X 34W	A-363612-SFR	3	36	36	12	0.100
A-424212-SFW	36H X 40W	A-424212-SFR	4	42	42	12	0.100
A-424812-SFW	36H X 46W	A-424812-SFR	4	42	48	12	0.125
A-484212-SFW	42H X 40W	A-484212-SFR	4	48	42	12	0.125
A-484812-SFW	42H X 46W	A-484812-SFR	4	48	48	12	0.125

Contact representative or factory for other cabinet sizes not listed.

- Stainless steel latch and locking tab (2) places.
- All external hardware is stainless steel.
- Supplied with #14-2/0 ground connector.
- G-90 galvanized steel or aluminum enclosures, NEMA 3R enclosures.

Pole Mounting Brackets

Aluminum — ARP00927—for units 24"-35" wide

ARP00929—for units 36"-48" wide

G-90 Steel — ARP00926—for units 24"-35" wide

ARP00928—for units 36"-48" wide

(Brackets includes hardware kit)


Pole Mount Bracket Hardware Kit

(2) Pole mount hanger brackets

(4) UU 5/16-18 x 3/4" carriage bolts


(4) UU 5/16 lock washers

Optional Pole Mounting Brackets
2 Brackets Per Kit, Mounting Hardware Included

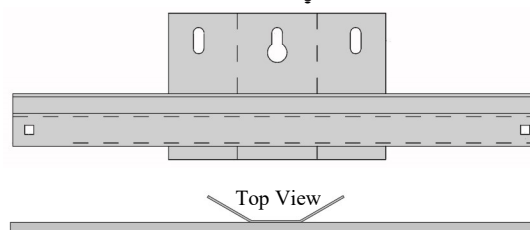

Current Transformer Enclosures - DD Series


Double Doors With Plywood Back Or Rails

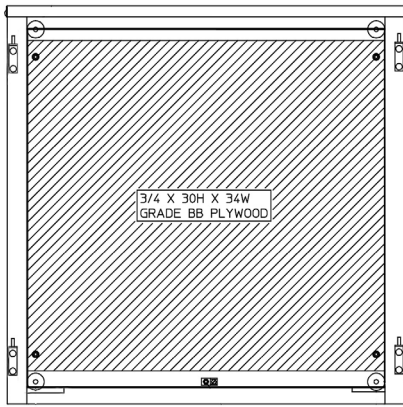

363612-DDW



363612-DDW

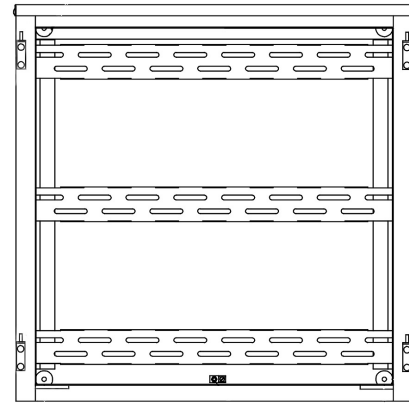

363612-DDR

Double Door (DD) Series G-90 Galvanized Steel Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
303012-DDW	24H X 28W	303012-DDR	3	30	30	12	14 GA
362413-DDW	30H X 22W	362413-DDR	3	36	24	13	14 GA
363612-DDW	30H X 34W	363612-DDR	3	36	36	12	14 GA
363613-DDW	30H X 34W	363613-DDR	3	36	36	13	14 GA
363616-DDW	30H X 34W	363616-DDR	3	36	36	16	14 GA
363618-DDW	30H X 34W	363618-DDR	3	36	36	18	14 GA
424212-DDW	36H X 40W	424212-DDR	4	42	42	12	14 GA
424214-DDW	36H X 40W	424214-DDR	4	42	42	14	14 GA
424812-DDW	36H X 46W	424812-DDR	4	42	48	12	14 GA
483612-DDW	42H X 34W	483612-DDR	4	48	36	12	14 GA
483614-DDW	42H X 34W	483614-DDR	4	48	36	14	14 GA
483616-DDW	42H X 34W	483616-DDR	4	48	36	16	14 GA
484212-DDW	42H X 40W	484212-DDR	4	48	42	12	14 GA
484812-DDW	42H X 46W	484812-DDR	4	48	48	12	14 GA
484813-DDW	42H X 46W	484813-DDR	4	48	48	13	14 GA
484816-DDW	42H X 46W	484816-DDR	4	48	48	16	14 GA
484818-DDW	42H X 46W	484818-DDR	4	48	48	18	14 GA

Double Door (DD) Series Aluminum Enclosures							
Catalog Number	Plywood Sizes	Catalog Number	# Horizontal Rails	Dimensions			Material
With Plywood		With Rails		H"	W"	D"	A
A-303012-DDW	24H X 28W	A-303012-DDR	3	30	30	12	0.100
A-362413-DDW	30H X 22W	A-362413-DDR	3	36	24	13	0.100
A-303612-DDW	24H X 34W	A-303612-DDR	3	30	36	12	0.100
A-363612-DDW	30H X 34W	A-363612-DDR	3	36	36	12	0.100
A-363613-DDW	30H X 34W	A-363613-DDR	3	36	36	13	0.100
A-363616-DDW	30H X 34W	A-363616-DDR	3	36	36	16	0.100
A-363618-DDW	30H X 34W	A-363618-DDR	3	36	36	18	0.100
A-424212-DDW	36H X 40W	A-424212-DDR	4	42	42	12	0.100
A-424214-DDW	36H X 40W	A-424214-DDR	4	42	42	14	0.100
A-424812-DDW	36H X 46W	A-424812-DDR	4	42	48	12	0.125
A-483612-DDW	42H X 34W	A-483612-DDR	4	48	36	12	0.125
A-483614-DDW	42H X 34W	A-483614-DDR	4	48	36	14	0.125
A-483616-DDW	42H X 34W	A-483616-DDR	4	48	36	16	0.125
A-484212-DDW	42H X 40W	A-484212-DDR	4	48	42	12	0.125
A-484812-DDW	42H X 46W	A-484812-DDR	4	48	48	12	0.125
A-484813-DDW	42H X 46W	A-484813-DDR	4	48	48	13	0.125
A-484816-DDW	42H X 46W	A-484816-DDR	4	48	48	16	0.125
A-484818-DDW	42H X 46W	A-484818-DDR	4	48	48	18	0.125

- Stainless steel latch and locking tab (2) places.
- All external hardware is stainless steel.
- Supplied with #14-2/0 ground connector.
- G-90 galvanized steel or aluminum enclosures, NEMA 3R enclosures.

Contact representative or factory for other cabinet sizes not listed.

Pole Mounting Brackets Kits

Aluminum — ARP00927—for units 24"-35" wide

ARP00929—for units 36"-48" wide

G-90 Steel — ARP00926—for units 24"-35" wide

ARP00928—for units 36"-48" wide

(Brackets includes hardware kit)

Pole Mount Bracket Hardware Kit


(2) Pole mount hanger brackets

(4) UU 5/16-18 x 3/4" carriage bolts

(4) UU 5/16 lock washers

(4) 5/16-18 hex nuts

Optional Pole Mounting Brackets
2 Brackets Per Kit, Mounting Hardware Included

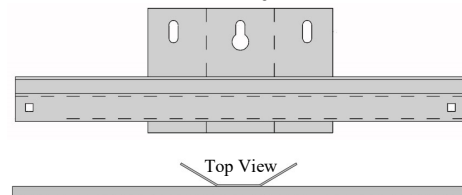

Top View

Current Transformer Enclosures

200, 400, 600 & 800 Ampere | With Rotatable Current Transformer Mounting Rack



UMTE83B6D (800 Ampere)

Catalog Number Designation For 200, 400, 600, & 800 Amp Enclosures.


Examples: Cat# U MTE 8 3 B 6 D = Cat# UMTE83B6D

0 1 2 3 4 5 6

Cat# MTE 8 3 B 6 D = Cat# MTE83B6D

1 2 3 4 5 6


- 0 - U = UL/CUL Listing (Optional)
- 1 - MTE = Metering Transformer Enclosure
- 2 - (2) = 200 Ampere
 - (4) = 400 Ampere
 - (6) = 600 Ampere
 - (8) = 800 Ampere
- 3 - (1) = Single Phase (Omission of Center Phase)
 - (3) = Three Phase
- 4 - B = CT Bars Installed
 - N = No CT Bars Installed
- 5 - (2) = 6-250MCM Line & Load Connectors
 - (3) = 6-350MCM Line & Load Connectors
 - (6) = 2-600MCM Line & Load Connectors
- 6 - R = Right Hand Door
 - L = Left Hand Door
 - D = Double Door

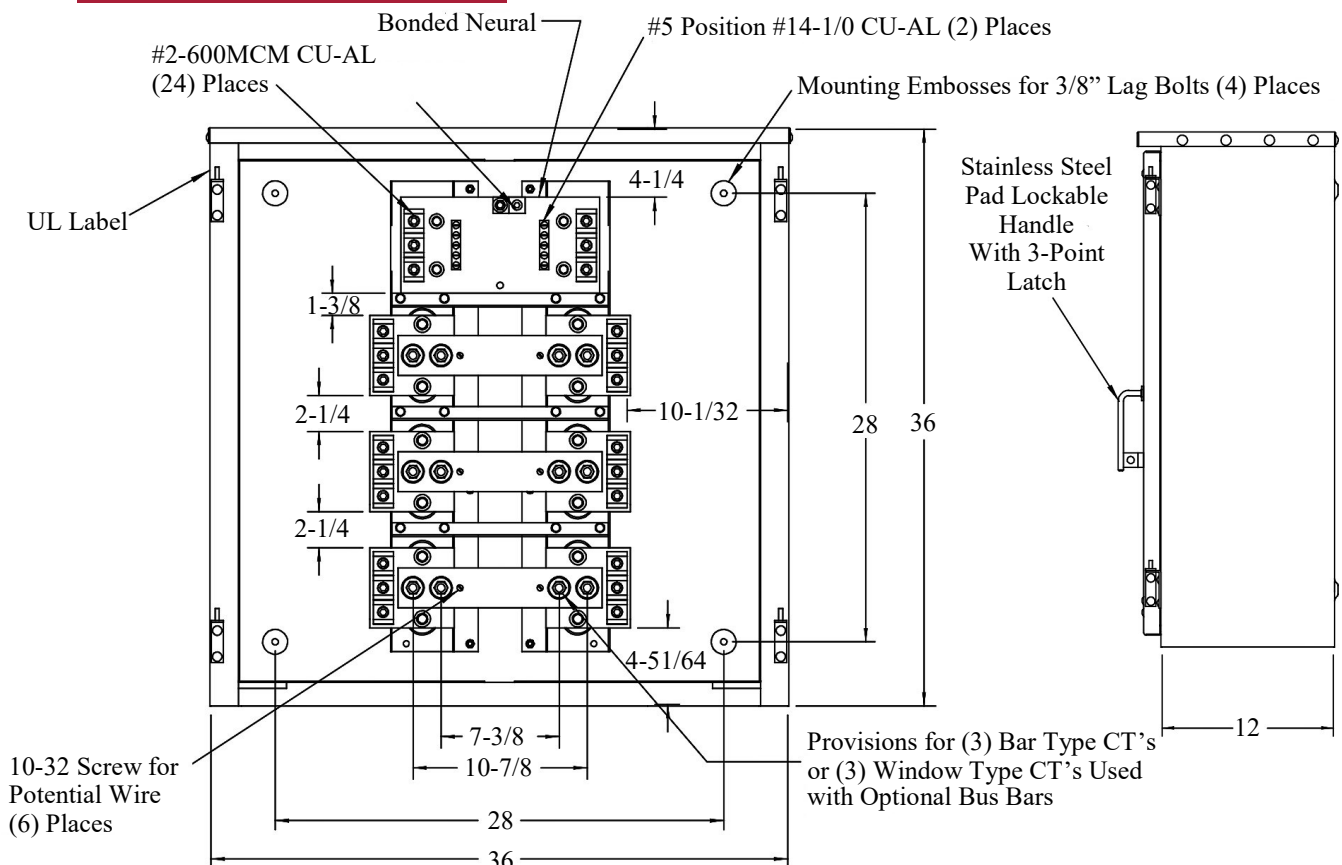

- Electrical Ratings: 200, 400, 600 or 800 Ampere, 3 Phase, 4 Wire, Volt AC, 50K SCCR, NEMA 3R Enclosure.
- Transformer rack assembly designed to rotated 180 degrees for overhead or underground feed.
- Provisions for (3) Bar Type Current Transformer or (3) Window Type Current Transformers used with optional bus bars.
- All external hardware and hinges are stainless steel.
- Supplied with 3-point latch with stainless steel pad lockable handle.
- Units available in G-90 galvanized steel or aluminum.
- NEMA 3R Enclosures.

Breaker Generator Transfer Switches

Single Phase | 100 & 200 Ampere | W/O Metering Provision | 120/240 VAC

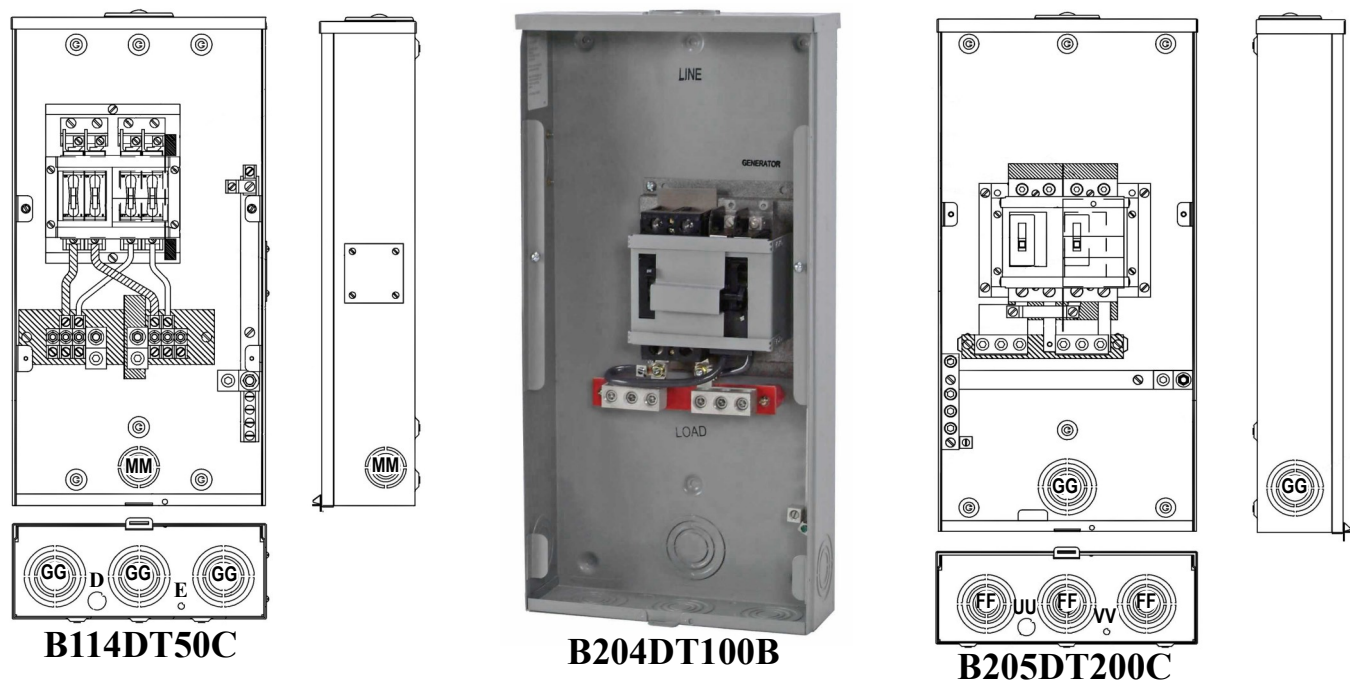

Catalog Number	Main Breaker Amps	Auxiliary Breaker Amps	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
B114DT50B	100	50	HO	#14-1/0	#6-250, (3) #14-1/0	23-3/8	12	4-23/64
B114DT50C	100	50	HCP	#14-1/0	#6-250, (3) #14-1/0	23-3/8	12	4-23/64
B114DT50N	100	50	2" Hub	#14-1/0	#6-250, (3) #14-1/0	23-3/8	12	4-23/64
B114DT100C	100	100	HCP	#14-1/0	#6-250, (3) #14-1/0	23-3/8	12	4-23/64
B114DT100L	100	100	1-1/4" Hub	#14-1/0	#6-250, (3) #14-1/0	23-3/8	12	4-23/64
B204DT50C	200	50	HCP	#3-250	(3) #6-250	26-13-32	13	4-3/8
B204DT100B	200	100	HO	#3-250	(3) #6-250	26-13-32	13	4-3/8
B204DT100C	200	100	HCP	#3-250	(3) #6-250	26-13-32	13	4-3/8
B204DT100N	200	100	2" Hub	#3-250	(3) #6-250	26-13-32	13	4-3/8
B205DT200C	200	200	HCP	#3-250	(3) #6-250	27	13	4-3/8

50 Amp Twist Lock
Male Receptacle: ARP00176



Replacement Auxiliary Breaker Kits
50 Amp Auxiliary: ARP00137
100 Amp Auxiliary: ARP00138
200 Amp Auxiliary: ARP01878


Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 205 units.
- NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.
- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Concentric Knockout	
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Socket Breaker Generator Transfer Switches


4 Jaw | Single Phase | 100 Ampere | With Metering Provision | Ringless Style | 120/240 VAC

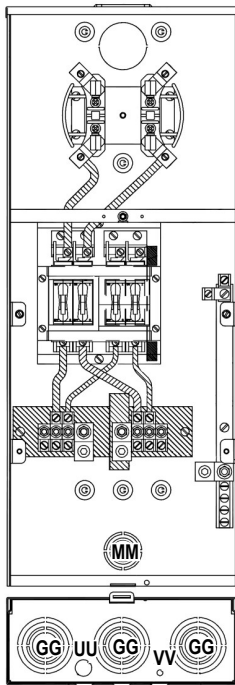


SB114DT50B



SB114DTR50B

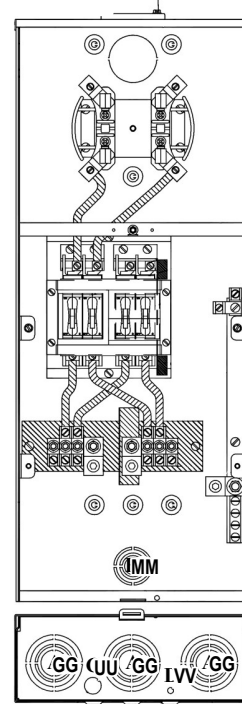

SB114DT100N



Catalog Number	Main Breaker Amps	Auxiliary Breaker Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Dimensions			Auxiliary Connectors
					Line	Load	H"	W"	D"	
SB114DT50B	100	50	-	HO	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT50C	100	50	-	HCP	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT50L	100	50	-	1-1/4" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT50M	100	50	-	1-1/2" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT50N	100	50	-	2" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DTR50B	100	50	Yes	HO	#8-2/0	#6-250, (3) #14-1/0	50 Amp Rec.	30-9/32	12	4-23/64
SB114DT100B	100	100	-	HO	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT100C	100	100	-	HCP	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT100L	100	100	-	1-1/4" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT100M	100	100	-	1-1/2" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64
SB114DT100N	100	100	-	2" Hub	#8-2/0	#6-250, (3) #14-1/0	#14-2/0	30-9/32	12	4-23/64

50 Amp Twist Lock Male Receptacle: ARP00176



Replacement Auxiliary Breaker Kits

50 Amp Auxiliary: ARP00137

100 Amp Auxiliary: ARP00138


Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 205 units.
- NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.
- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Socket Breaker Generator Transfer Switches


Single Phase | 200 Ampere | With Metering Provision | Ringless Style | 120/240 VAC

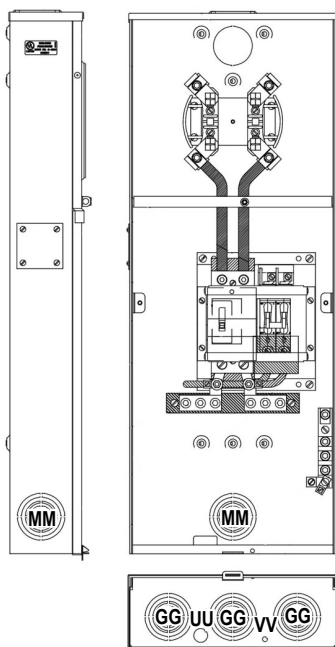

USB204DT100B



USB204DT100N

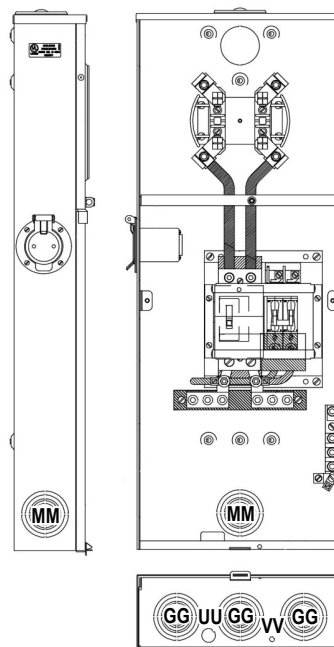

USB204DTR50C

Catalog Number	Main Breaker Amps	Auxiliary Breaker Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Dimensions			Auxiliary Connectors
					Line	Load	H"	W"	D"	
USB204DT50B	200	50	-	HO	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB204DT50C	200	50	-	HCP	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB204DT50P	200	50	-	2-1/2" Hub	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB204DTR50B	200	50	Yes	HO	#6-250	(3) #6-250	4-3/8	34-1/4	13	50 Amp Rec.
USB204DTR50C	200	50	Yes	HCP	#6-250	(3) #6-250	4-3/8	34-1/4	13	50 Amp Rec.
USB204DTR50N	200	50	Yes	2" Hub	#6-250	(3) #6-250	4-3/8	34-1/4	13	50 Amp Rec.
USB204DT100B	200	100	-	HO	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB204DT100C	200	100	-	HCP	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB204DT100N	200	100	-	2" Hub	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB205DT200B	200	200	-	HO	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB205DT200C	200	200	-	HCP	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0
USB205DT200N	200	200	-	2" Hub	#6-250	(3) #6-250	4-3/8	34-1/4	13	#14-1/0

50 Amp Twist Lock Male Receptacle: ARP00176



Replacement Auxiliary Breaker Kits

50 Amp Auxiliary: ARP00137
100 Amp Auxiliary: ARP00138
200 Amp Auxiliary: ARP01878


Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 205 units.
- NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.
- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Socket Breaker Generator Transfer Switches - Wide


4 Jaw - Single Phase | 200 Ampere | With Metering Provision | Ringless Style | 120/240 VAC

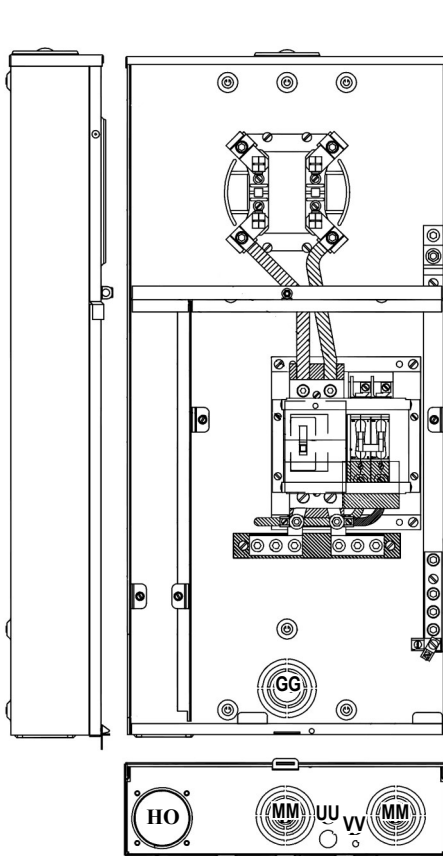

1009556



1009883

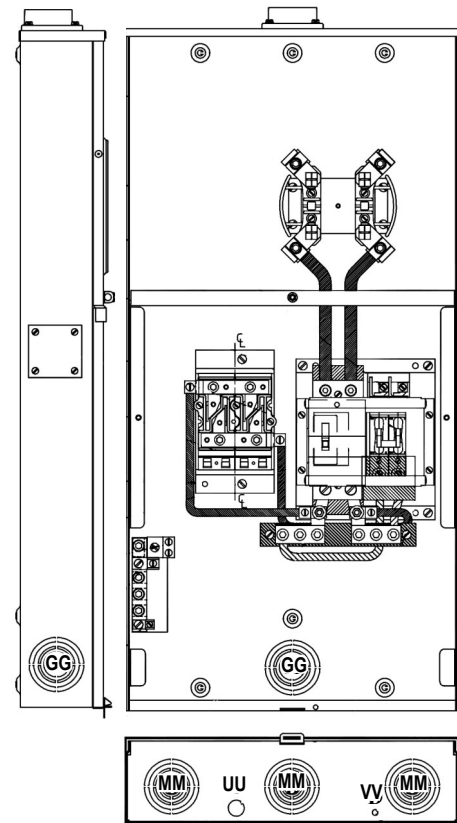

1009883

Catalog Number	Main Breaker Amps	Auxiliary Breaker Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Dimensions			Auxiliary Connectors
					Line	Load	H"	W"	D"	
*1009883	200	100	-	2" Hub	#6-250	(3) #6-250	37	17-15/16	4-3/8	#14-1/0
1009556	200	100	N/A	HCP	#6-250	(3) #6-250	34-1/4	16-3/64	4-3/8	#14-1/0

50 Amp Twist Lock Male Receptacle: ARP00176



Replacement Auxiliary Breaker Kits 100 Amp Auxiliary: ARP00138


Hub / Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2" (SM)	P

- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 205 units.
- NEMA 3R enclosures, add "U" prefix to catalog number for UL label.
- G-90 galvanized steel.
- For Meter Socket options see replacement parts & accessories pages.
- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Socket Breaker Generator Transfer Switches

4 Jaw | Single Phase | 320 Ampere | With Metering Provision | Lever Bypass | Ringless Style | 120/240 VAC

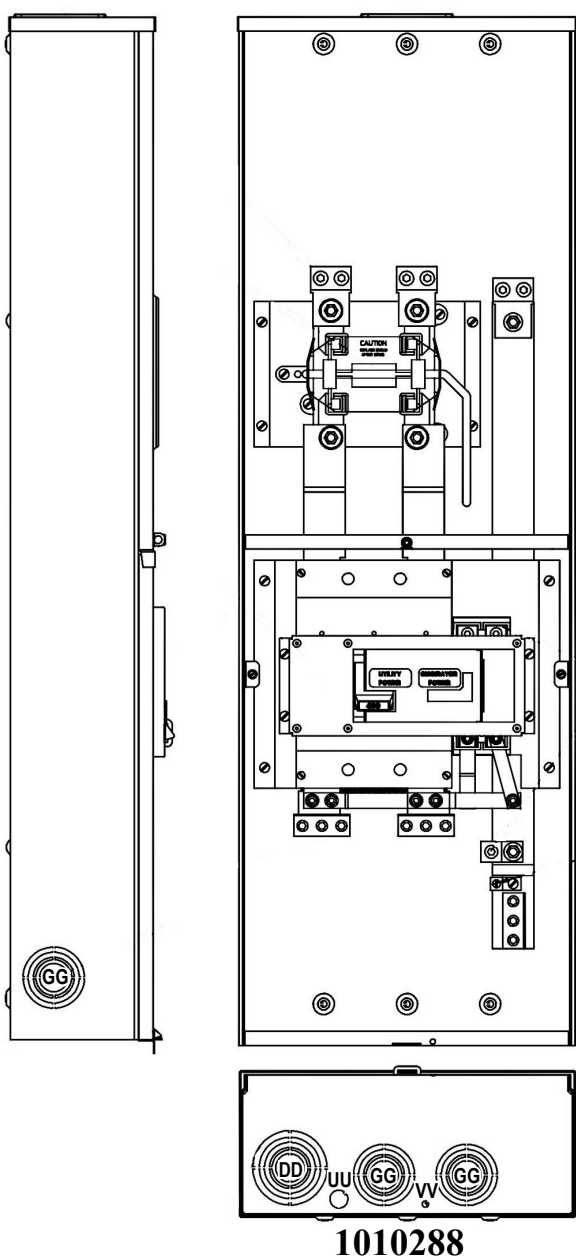

Catalog Number	Main Breaker Amps	Auxiliary Breaker Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Dimensions			Auxiliary Connectors
					Line	Load	H"	W"	D"	
1010288	400	200	HO (LG)	(2) #6-350	(3) #6-250	#2/0-250	49-1/2	16	6-3/4	3



Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4" (SM)	L
1-1/2" (SM)	M
2" (SM)	N
2-1/2"(SM)	P

- Unit painted gray.
- Breaker interlock assembly 400 ampere main breaker, standby breaker 200 ampere.
- 320 amperes continuous, 120/240 VAC.
- For Meter Socket options see replacement parts & accessories pages.
- G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

200 & 320 Ampere 277/480 Volt - Line Or Load Side Switches


7 Jaw | HQ Lever Bypass | Three Phase | 4-Wire | 277/480 VAC

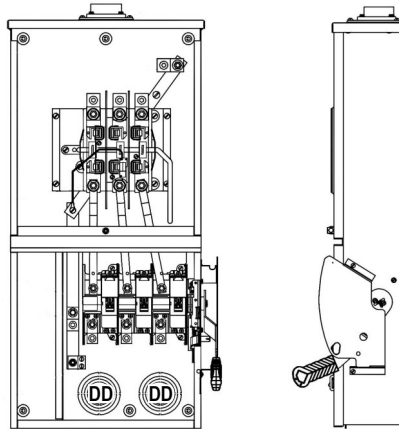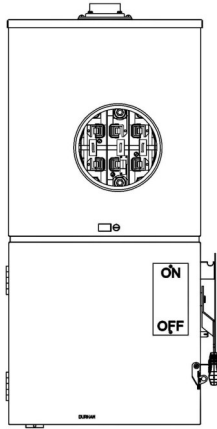


1010052




1011173

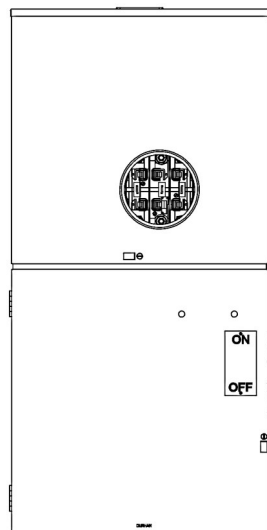

1011173

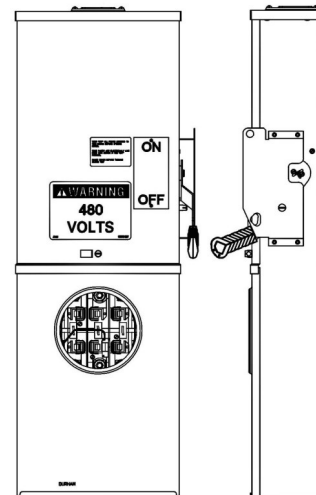

Line Side
Cold Sequence
Switch

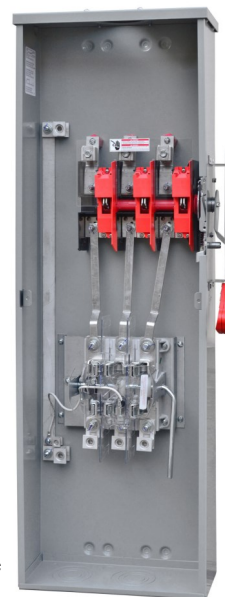

1010171A

Catalog Number	Amps	Side Switch	Hub	Wire Size CU-AL		Dimensions		
				Line	Load	H"	W"	D"
1010052	200	Load Side	5"X 5" Adapter Plate With 2" Hub	#6-350	#6-250	34-9/16	16	5-7/8
*1010171A	200	Line Side	5"X 5" Adapter Plate With 3-5/16" HO	#6-350	#6-350	41-13/16	13-31/32	5-13/16
1011173	320	Load Side	Large Hub Opening	#6-350	#6-350	49-3/4	24	8-1/4


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Switch is designed to be locked in the off position and bottom cover can not be opened except when the switch is in the off position.
- *1010171A has line side cold sequence switch.G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
AA	4, 3-1/2, 3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

Load Management Enclosures

With Contactor Switch | Three Phase | 170 Amps | 4-Wire | 277 VAC

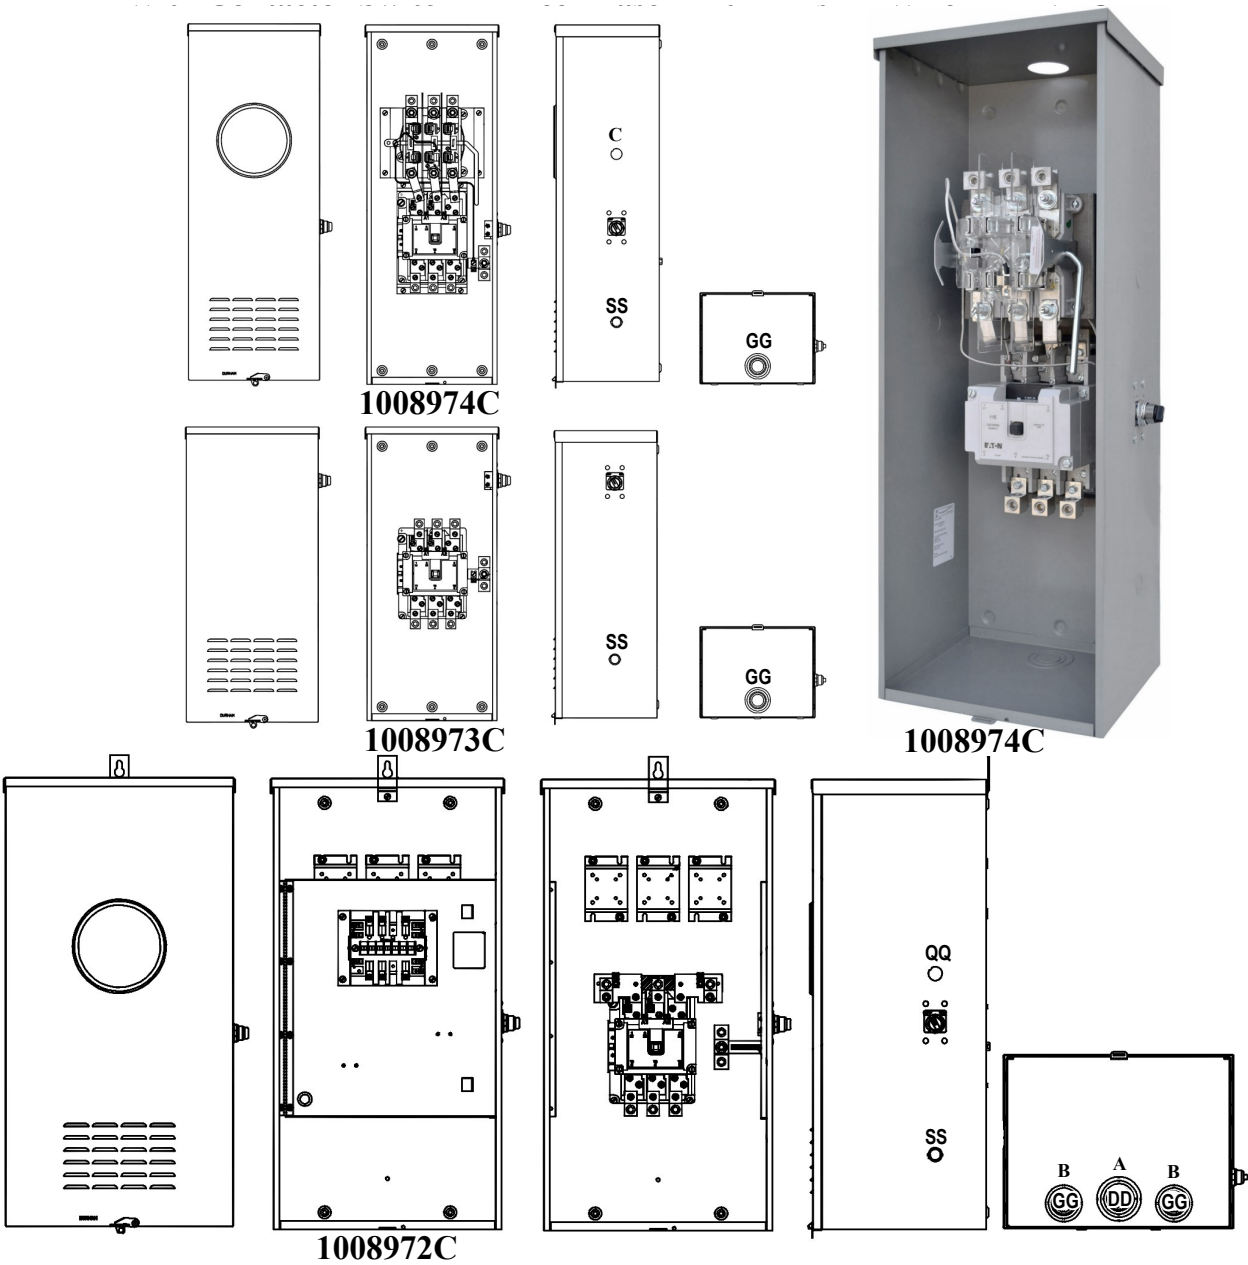

Catalog Number	Details	Top	Wire Size CU-AL		Dimensions		
			Line	Load	H"	W"	D"
1008973C	Contactor Switch Only	2-1/2" Dia. Opening For 2" Conduit	#6-350	#6-350	29-3/8	12-7/8	10-15/64
1008974C	7 Jaw Lever Bypass & Contactor Switch	2-1/2" Dia. Opening For 2" Conduit	#6-350	#6-350	36	12-7/8	10-15/64
1008972C	13 Jaw & Contactor Switch - Provisions For (3) Window CT's & Test Switch	3" Dia. Opening For 2-1/2" Conduit	#6-350	#6-350	36	18	13-3/4


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- 170 amperes, 277 VAC, 3 phase, 4 wire.
- 277 volt contactor switch.
- 2-Position on/off selector switch on side.
- Provisions for locking flip cover for on/off selector switch (ARP01494).
- G-90 galvanized steel, NEMA 3R enclosures.
- Units painted gray.


Concentric Knockout	
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
SS	3/4

Meter Socket Generator Transfer Switches - Self Contained


4 Jaw | 100 & 200 Ampere | Single Phase | Ringless Style | 120/240 VAC

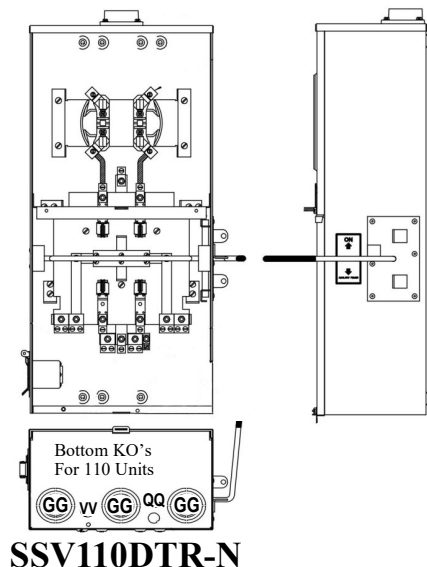

SSV110DTR-N

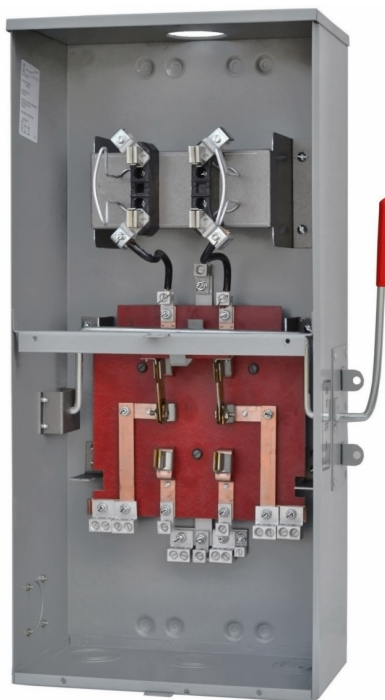

SSV110DT-B

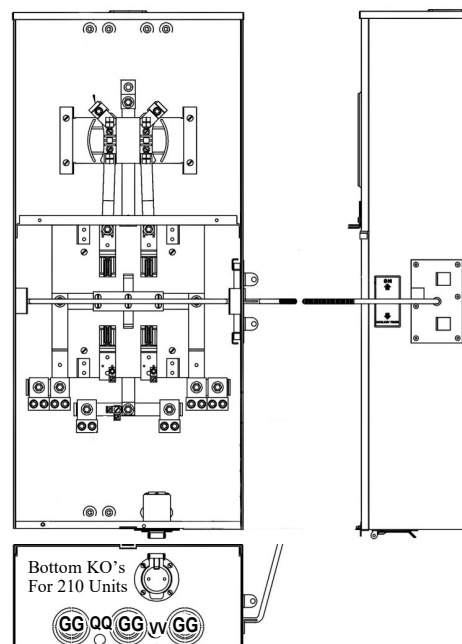

SSV210DTR-B

100 & 200 Ampere - 4 Jaw - Self Contained - Ringless - Meter Socket/Switches												
Catalog Number	# Jaws	Meter Form	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
							Line	Load		H"	W"	D"
SSV110DT-B	4	2S	100	100	-	HO (SM)	#8-2/0	(4) #14-1/0	#14-1/0	30	14	8-1/4
SSV110DT-C	4	2S	100	100	-	HCP (SM)	#8-2/0	(4) #14-1/0	#14-1/0	30	14	8-1/4
SSV110DT-CC	4	2S	100	100	-	(2) HCP (SM)	#8-2/0	(4) #14-1/0	#14-1/0	30	14	8-1/4
SSV110DT-M	4	2S	100	100	-	1-1/2" Hub (SM)	#8-2/0	(4) #14-1/0	#14-1/0	30	14	8-1/4
SSV110DT-N	4	2S	100	100	-	2" Hub	#8-2/0	(4) #14-1/0	#14-1/0	30	14	8-1/4
SSV110DTR-C	4	2S	100	100	yes	HCP (SM)	#8-2/0	(4) #14-1/0	50 Amp Rec.	30	14	8-1/4
SSV110DTR-L	4	2S	100	100	yes	1-1/4" Hub	#8-2/0	(4) #14-1/0	50 Amp Rec.	30	14	8-1/4
SSV110DTR-N	4	2S	100	100	yes	2" Hub	#8-2/0	(4) #14-1/0	50 Amp Rec.	30	14	8-1/4
SSV210DT-B	4	2S	200	200	-	HO (SM)	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV210DT-N	4	2S	200	200	-	2" Hub	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV210DT-T	4	2S	200	200	-	HO (LG)	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV210DTR-B	4	2S	200	200	yes	HO (SM)	#6-350	(4) #6-250	50 Amp Rec.	40-1/2	17-15/16	8-15/64
SSV210DTR-N	4	2S	200	200	yes	2" Hub	#6-350	(4) #6-250	50 Amp Rec.	40-1/2	17-15/16	8-15/64
SSV210DTR-T	4	2S	200	200	yes	HO (LG)	#6-350	(4) #6-250	50 Amp Rec.	40-1/2	17-15/16	8-15/64

50 Amp Twist Lock Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2" (LG)	V
1-1/2" (SM)	M	3" (LG)	Q
2" (SM)	N	3-1/2" (LG)	R
2-1/2" (SM)	P	4" (LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate.
- G-90 galvanized steel.
- NEMA 3R enclosures.



Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
VV	5/16

Meter Socket Generator Transfer Switches - Self Contained


4 Jaw |200 & 320 Ampere | HQ Lever Bypass | Single Phase | Ringless Style | 120/240 VAC

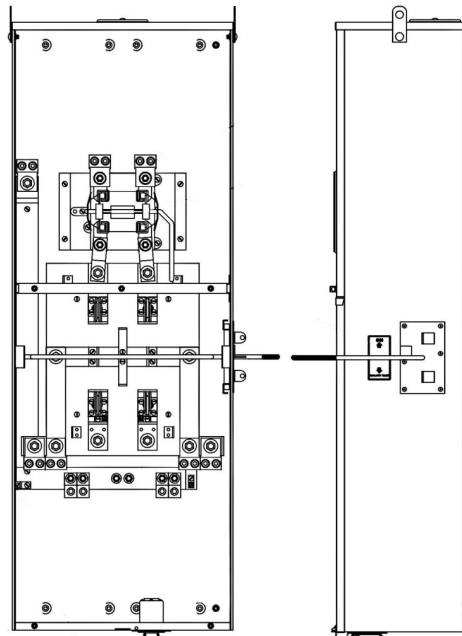

SSV310DTR-U

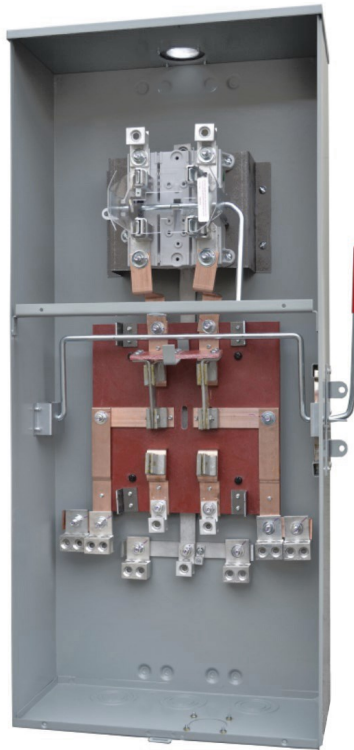

SSV211DT-N

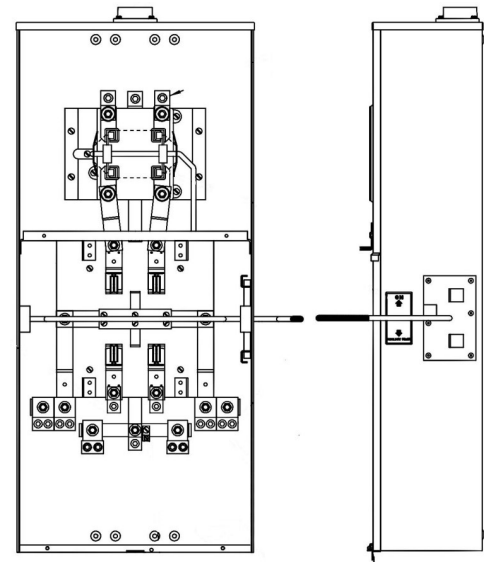

SSV211DT-N



200 & 320 Ampere - 4 Jaw - Lever Bypass - Ringless - Meter Socket/Switches												
Catalog Number	# Jaws	Meter Form	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
							Line	Load		H"	W"	D"
SSV211DT-B	4	2S	200	200	-	HO (SM)	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV211DT-C	4	2S	200	200	-	HCP (SM)	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV211DT-N	4	2S	200	200	-	2" Hub	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV211DT-P	4	2S	200	200	-	2-1/2" Hub	#6-350	(4) #6-250	#6-250	40-1/2	17-15/16	8-15/64
SSV211DTR-C	4	2S	200	200	yes	HCP (SM)	#6-350	(4) #6-250	50 Amp Rec.	40-1/2	17-15/16	8-15/64
SV211DTR-N	4	2S	200	200	yes	2" Hub	#6-350	(4) #6-250	50 Amp Rec.	40-1/2	17-15/16	8-15/64
SSV310DT-Q	4	2S	320	320	-	3" Hub	(2) #6-350	(4) #6-350	(2) #6-350	55-1/4	19-7/8	11-15/64
SSV310DT-R	4	2S	320	320	-	3-1/2" Hub	(2) #6-350	(4) #6-350	(2) #6-350	55-1/4	19-7/8	11-15/64
SSV310DT-T	4	2S	320	320	-	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	55-1/4	19-7/8	11-15/64
SSV310DT-U	4	2S	320	320	-	HCP (LG)	(2) #6-350	(4) #6-350	(2) #6-350	55-1/4	19-7/8	11-15/64
SSV310DTR-T	4	2S	320	320	yes	HO (LG)	(2) #6-350	(4) #6-350	50 Amp Rec.	55-1/4	19-7/8	11-15/64
SSV310DTR-U	4	2S	320	320	yes	HCP (LG)	(2) #6-350	(4) #6-350	50 Amp Rec.	55-1/4	19-7/8	11-15/64

50 Amp Twist Lock Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2" (LG)	V
1-1/2" (SM)	M	3" (LG)	Q
2" (SM)	N	3-1/2" (LG)	R
2-1/2" (SM)	P	4" (LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate.
- G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
QQ	3/4, 1/2
UU	1/2
VV	5/16

Meter Socket Generator Transfer Switches


5 Jaw | 400 & 600 Ampere | Single Phase | Ring Style | 120/240 VAC

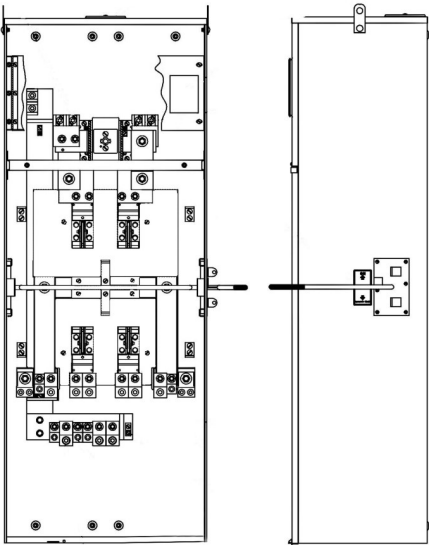


SSV610DT-T



ASSV410DT-T
Aluminum Unit

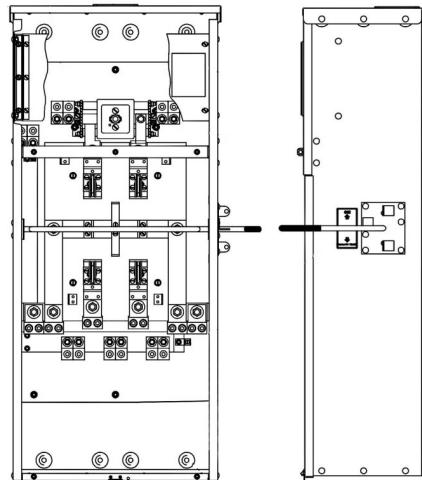

SSV410DT-T



200 & 320 Ampere - 4 Jaw - Lever Bypass - Ringless - Meter Socket/Switches													
Catalog Number	# Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
								Line	Load		H"	W"	D"
SSV410DT-Q	5	3S	200/200:5	400	400	-	3" Hub	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
SSV410DT-QQ	5	3S	200/200:5	400	400	-	(2) 3" Hubs	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
SSV410DT-R	5	3S	200/200:5	400	400	-	3-1/2 Hub	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
SSV410DT-T	5	3S	200/200:5	400	400	-	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
ASSV410DT-T	5	3S	200/200:5	400	400	-	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
SSV410DT-TT	5	3S	200/200:5	400	400	-	(2) HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
SSV410DT-U	5	3S	200/200:5	400	400	-	HCP (LG)	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	19-7/8	11-15/64
*SSV610DT-W	5	3S	300/300:5	600	600	N/A	3" Hub	(2) 1/0-500	(1) 1/0-500 (3) #6-350	(2) #4-500	60	23	15-1/4
*SSV610DT-S	5	3S	300/300:5	600	600	N/A	4" Hub	(2) 1/0-500	(1) 1/0-500	(2) #4-500	60	23	15-1/4
*SSV610DT-T	5	3S	300/300:5	600	600	N/A	HO (LG)	(2) 1/0-500	(1) 1/0-500 (3) #6-350	(2) #4-500	60	23	15-1/4
*SSV610DT-U	5	3S	300/300:5	600	600	N/A	HCP (LG)	(2) 1/0-500	(1) 1/0-500 (3) #6-350	(2) #4-500	60	23	15-1/4
*SSV610DT-VV	5	3S	300/300:5	600	600	N/A	(2) HCP (LG)	(2) 1/0-500	(1) 1/0-500 (3) #6-350	(2) #4-500	60	23	15-1/4

**50 Amp Twist Lock
Male Receptacle: ARP00176**



- Field Installable 50 Amp Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub / Top Configuration	Catalog Suffix	Hub / Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- *Does not have provisions for twist lock receptacle.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- G-90 galvanized steel.
- NEMA 3-R enclosures

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
QQ	3/4, 1/2
VV	5/16

Meter Socket Generator Transfer Switches Transformer Rated


7 & 13 Jaw | 100, 200, 400 & 600 Ampere | Three Phase | 120/240 VAC

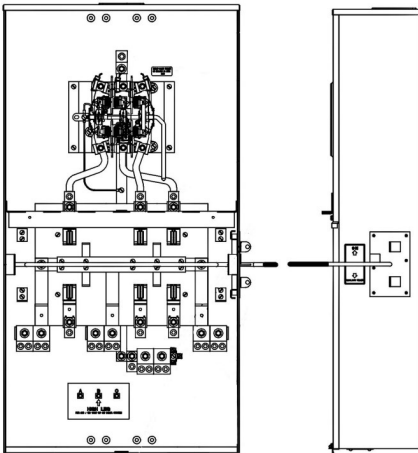



SSV213DT-T



SSV213DT-T

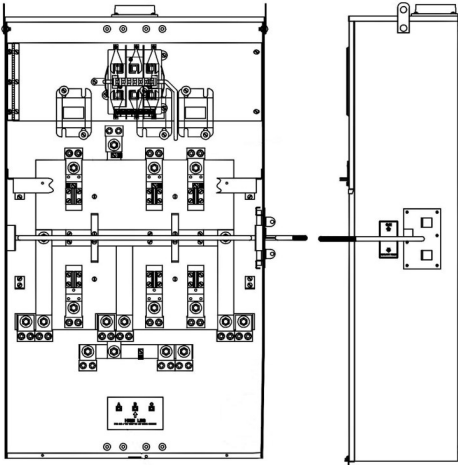

SSV423DT-R



100 Ampere - 7 Jaw - Self Contained- Ring Style - Meter Socket/Switches													
Catalog Number	# Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
								Line	Load		H"	W"	D"
SSV113DT-B	7	15S	N/A	100	100	-	HO	#14-1/0	#14-1/0	#14-1/0	44	23	8-31/64
SSV113DT-C	7	15S	N/A	100	100	-	HCP	#14-1/0	#14-1/0	#14-1/0	44	23	8-31/64
SSV113DT-T	7	15S	N/A	100	100	-	HO (LG)	#14-1/0	#14-1/0	#14-1/0	44	23	8-31/64
200 Ampere - 7 Jaw - Self Contained - Lever Bypass - Ringless Style - Socket/Switches													
SSV213DT-Q	7	15S	N/A	200	200	-	3" Hub	#6-350	(4) #6-250	#6-250	44	23	8-31/64
SSV213DTR-T	7	15S	N/A	200	200	yes	HO (LG)	#6-350	(4) #6-250	50 Amp Rec.	44	23	8-31/64
SSV213DT-T	7	15S	N/A	200	200	-	HO (LG)	#6-350	(4) #6-250	#6-250	44	23	8-31/64
200, 400 & 600 Ampere - 13 Jaw - Transformer Rated - Lever Bypass - Ringless Style - Socket/Switches													
SSV233DT-T	13	8S	(3) 200:5	200	200	-	HO (LG)	#6-250	#6-250	#6-250	42	23	11-39/64
*SSV423DT-Q	13	8S	(3) 400:5	400	400	N/A	3" Hub	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-39/64
*SSV423DT-QQ	13	8S	(3) 400:5	400	400	N/A	(2) 3" Hubs	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-39/64
*SSV423DT-R	13	8S	(3) 400:5	400	400	N/A	3-1/2" Hub	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-39/64
*SSV423DT-S	13	8S	(3) 400:5	400	400	N/A	4" Hub	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-39/64
*SSV423DT-T	13	8S	(3) 400:5	400	400	N/A	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-39/64
*SSV623DT-TT	13	8S	(3) 400:5 RF 4	600	600	N/A	(2) HO (LG)	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	55	33-1/2	15-1/4

50 Amp Twist Lock
Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2" (LG)	V
1-1/2" (SM)	M	3" (LG)	Q
2" (SM)	N	3-1/2" (LG)	R
2-1/2" (SM)	P	4" (LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for UUV423 & UUV623 units).
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for 423 & 623 units.
- Units shipped without receptacles have a removable bolted cover plate.
- G-90 galvanized steel.
- NEMA 3R enclosures.

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
FF	2-1/2, 2, 1-1/2, 1-1/4, 1, 3/4, 1/2
KK	2-1/2, 2
UU	1/2
VV	5/16

Meter Socket Generator Transfer Switches

4 & 5 Jaw | 100, 200, 320, 400 & 600 Ampere | Single Phase | 120/240 VAC

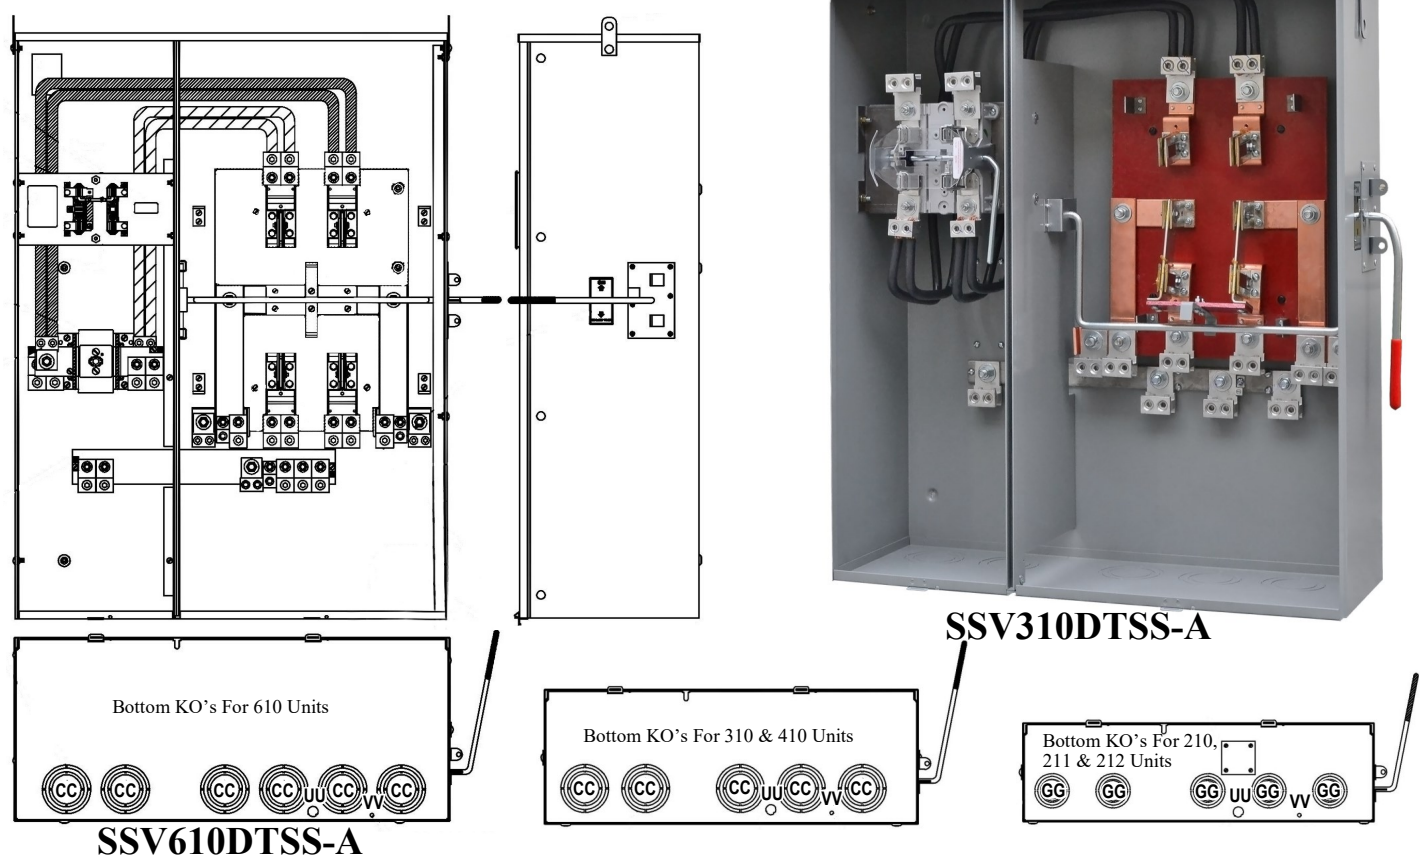

100 Ampere - 7 Jaw - Self Contained - Ring Style - Meter Socket/Switches												
Catalog Number	# Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
							Line	Load		H"	W"	D"
SSV210DTRSS-A	4	2S	N/A	100	100	X	(1) #6-350	(4) #6-250	50 Amp Rec.	30	30	8-15/64
SSV210DTSS-A	4	2S	N/A	100	100	-	(1) #6-350	(4) #6-250	#6-250	30	30	8-15/64
200 & 320 Ampere - 4 Jaw - Self Contained - Lever Bypass -Ringless Style - Socket/Switches												
SSV211DTRSS-A	4	2S	N/A	200	200	X	(1) #6-350	(4) #6-250	50 Amp Rec.	30	30	8-15/64
SSV211DTSS-A	4	2S	N/A	200	200	-	(1) #6-350	(4) #6-250	#6-250	30	30	8-15/64
*SSV310DTSS-A	4	2S	N/A	320	320	N/A	(2) #6-350	(4) #6-350	(2) #6-350	36-7/8	31-15/16	11-15/64
200, 400 & 600 Ampere - 5 Jaw - Transformer Rated - Auto Circuit Closing - Ring Style - Socket/Switches												
SSV212DTSS-A	5	3S	100/100:5	200	200	-	(1) #6-350	(4) #6-250	#6-250	30	8-15/64	8-15/16
*SSV410DTSS-A	5	3S	200/200:5	400	400	N/A	(2) #6-350	(4) #6-350	(2) #6-350	36-7/8	11-15/64	11-15/64
*SSV610DTSS-A	5	3S	300/300:5	600	600	N/A	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	50	15-1/4	15-1/4

- Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177



50 Amp Twist Lock
Male Receptacle: ARP00176


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2" (SM)	P	4"(LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for 310, 410 and 610 units).
- *Does not have provisions for twist lock receptacle.
- Units shipped without receptacles have a removable bolted cover plate except for the 310, 410 and units.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- G-90 galvanized steel, NEMA 3R enclosures.

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

Meter Socket Generator Transfer Switches




7 & 13 Jaw | 200, 400 & 600 Ampere | Three Phase | 240 VAC

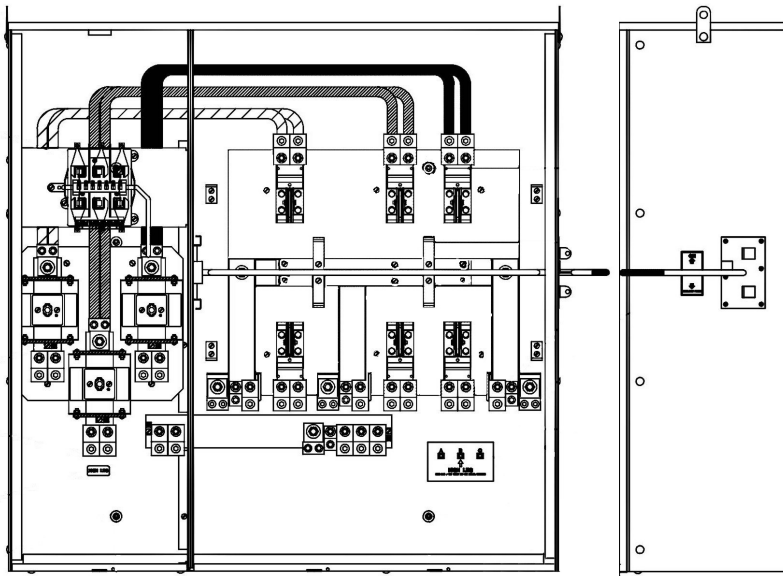

SSV623DTSS-A



SSV213DTSS-A

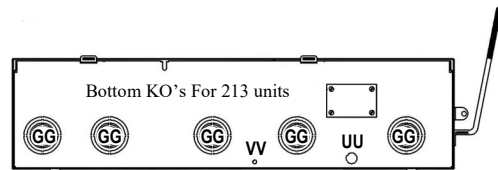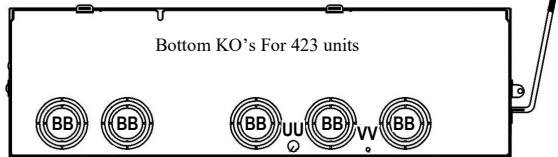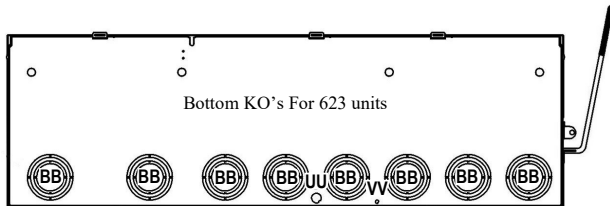

200 Ampere - 7 Jaw - Self Contained - Lever Bypass - Ringless Style - Meter Socket/Switches												
Catalog Number	# Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
							Line	Load		H"	W"	D"
SSV213DTSS-A	7	12S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	35-1/2	35-1/4	8-1/2
600 Ampere - 13 Jaw - Transformer Rated - Lever Bypass - Ringless Style - Meter Socket/Switches												
*SSV423DTSS-A	13	8S	(3) 400:5	400	400	N/A	(2) #6-350	(4) #6-350	(2) #6-350	38-1/2	40-1/16	11-5/8
*SSV623DTSS-A	13	8S	(3) 400:5 RF 4	600	600	N/A	(2) #4-500	(1) #4-500	(2) #4-500	50	50	15-1/4

50 Amp Twist Lock Male Receptacle: ARP00176



- Twist Lock Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for 423 & 623 units).
- *Does not have provisions for twist lock receptacle.
- Units shipped without receptacles have a removable bolted cover plate except for the 423 & 623 units.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- G-90 galvanized steel, NEMA 3R enclosures.




Concentric Knockout	
BB	3-1/2, 2-1/2, 2, 1-1/4, 1
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

Generator Transfer Switches - Self Contained

100 & 200 Ampere | Single Phase | W/O Meter Socket | 480 VAC



SX110DT-B

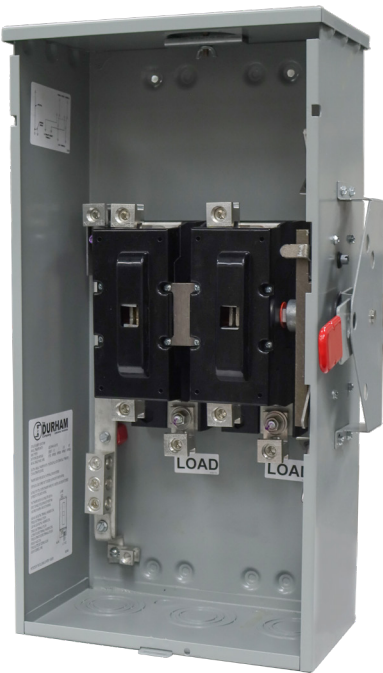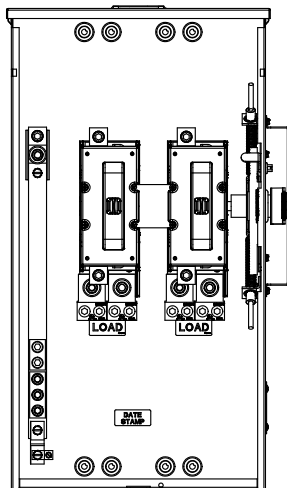

SX210DT-5656
US Patent 10923301

G-90 Galvanized Steel - 100 & 200 Ampere - Single Phase - Self Contained - Switches										
Catalog Number	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
					Line	Load		H"	W"	D"
*SX110DT-B	100	100	-	HO	#14- 1/0	(4) #14-1/0	#14-1/0	24	14-3/64	8-1/4
*SX110DT-C	100	100	-	HCP	#14- 1/0	(4) #14-1/0	#14-1/0	24	14-3/64	8-1/4
*SX110DT-N	100	100	-	2" Hub	#14- 1/0	(4) #14-1/0	#14-1/0	24	14-3/64	8-1/4
SX210DT-B	200	200	-	HO	#6-250	(4) #6-250	#6-250	35-15/16	17-15/16	8-1/4
SX210DTR-B	200	200	X	HO	#6-250	(4) #6-250	#6-250	35-15/16	17-15/16	8-1/4
SX210DT-C	200	200	-	HCP	#6-250	(4) #6-250	#6-250	35-15/16	17-15/16	8-1/4
SX210DT-N	200	200	-	2" Hub	#6-250	(4) #6-250	#6-250	35-15/16	17-15/16	8-1/4
Aluminum - 100 & 200 Ampere - Single Phase - Self Contained - Switches										
ASX210DT-Z	200	200	-	SM HO W/5X5 Hub Adapter	#6-350	(4) #6-250	#6-250	32-1/2	17-15/16	8-1/4
ASX210DT-SP	200	200	-	Solid	#6-250	(4) #6-250	#6-250	32-1/2	17-15/16	8-1/4

50 Amp Twist Lock Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP0177


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- *110 units have removable bolted cover plate for receptacle on the bottom.
- **Does not have provisions for twist lock 50 Amp receptacle.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the noted units.
- G-90 galvanized steel.
- NEMA 3-R enclosures.

Concentric Knockout	
DD	3, 2-1/2, 2, 1-1/2, 1-1/4, 1
HH	2-1/2, 2, 1-1/2, 1-1/4
UU	1/2
VV	5/16

Generator Transfer Switches - Self Contained

400, 600 & 800 Ampere | Single Phase | W/O Meter Socket | 120/240VAC

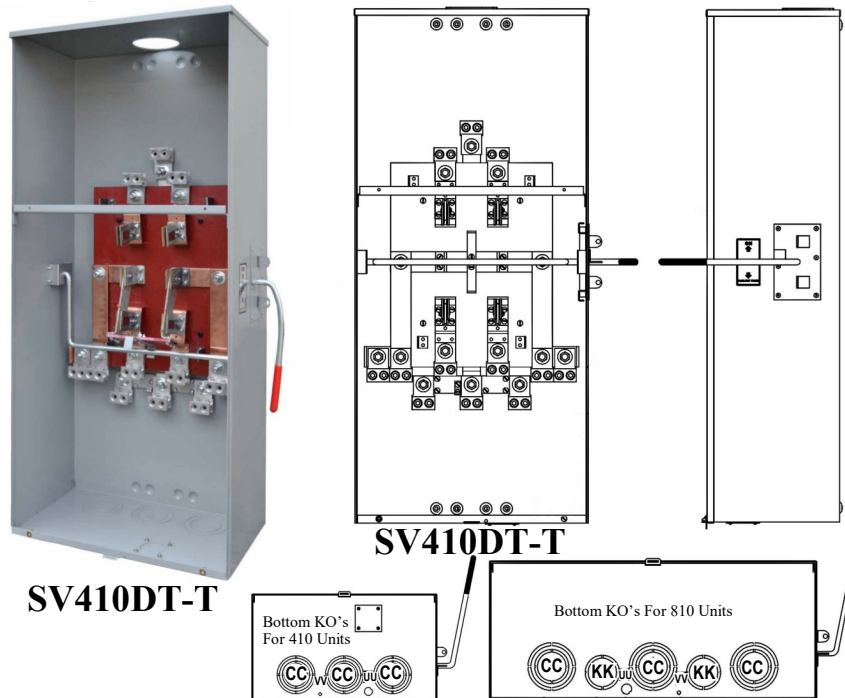

G-90 Galvanized Steel - 400, 600 & 800 Ampere - Single Phase - Self Contained - Switches										
Catalog Number	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
					Line	Load		H"	W"	D"
SV410DT-Q	400	400	-	3" Hub	(2) #6-350	(4) #6-350	(2) #6-350	44	19-7/8	11-1/4
SV410DT-T	400	400	-	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	44	19-7/8	11-1/4
SV410DT-U	400	400	-	HCP (LG)	(2) #6-350	(4) #6-350	(2) #6-350	44	19-7/8	11-1/4
*1010018	400	400	-	HO (LG)	(2) #6-350	2/0-300	(2) #6-250	51-3/4	19-7/8	11-1/4
**SV610DT-QQ	600	600	-	(2) 3" Hubs	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	23	15-11/64
**SV610DT-R	600	600	N/A	3-1/2" Hub	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	23	15-11/64
**SV610DT-S	600	600	N/A	4" Hub	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	23	15-11/64
**SV610DT-T	600	600	N/A	HO (LG)	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	23	15-11/64
**SV610DT-U	600	600	N/A	HCP (LG)	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	23	15-11/64
**SV810DT-TT	800	800	N/A	(2) HO (LG)	(3) #4-500	(3) #4-500	(2) #6-350	51-5/16	28	11-39/64
Aluminum - 400Ampere - Single Phase - Self Contained - Switches										
ASV410DT-T	400	400	-	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	44-1/4	19-7/8	11-1/4

50 Amp Twist Lock Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2" (LG)	V
1-1/2" (SM)	M	3" (LG)	Q
2" (SM)	N	3-1/2" (LG)	R
2-1/2" (SM)	P	4" (LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (**Not available for 610 or 810 units).
- *1010018 has (2) 200 Amp 2-pole load breakers and provisions for (4) position breakers.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 610 & 810 units.
- G-90 galvanized steel.
- NEMA 3-R enclosures.

Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
KK	2-1/2, 2
MM	1-1/2, 1-1/4, 1, 3/4, 1/2
UU	1/2
VV	5/16

Generator Transfer Switches - Self Contained


100, 200, 400 & 600 Ampere | Three Phase | W/O Metering Provisions | 240 VAC

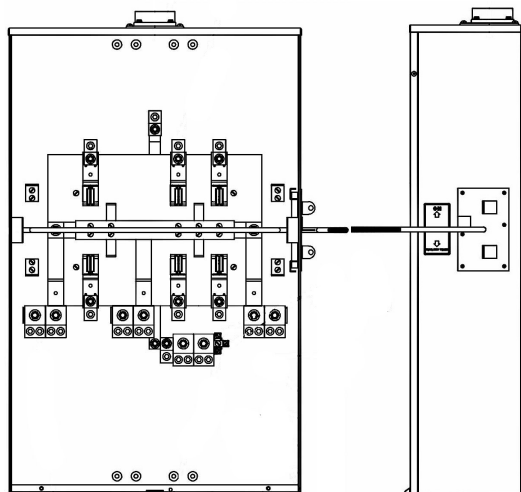


SV213DT-V



SV413DT-Q

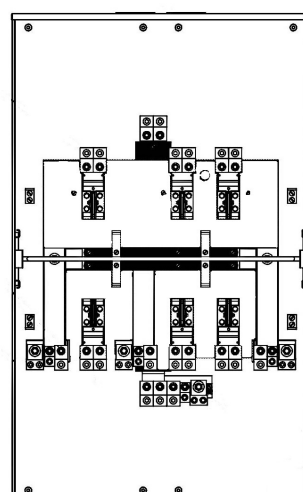

SV613DT-TT



100 Ampere - 4 Jaw - Self Contained - Ringless Style - Meter Socket/Switches											
Catalog Number	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Hub	Wire Size CU-AL		Auxiliary Connectors	Dimensions			
					Line	Load		H"	W"	D"	
SV113DT-B	100	100	-	HO	#14-1/0	(4) #14-1/0	#14-1/0	25	23	8-31/64	
SV113DT-C	100	100	-	HCP	#14-1/0	(4) #14-1/0	#14-1/0	25	23	8-31/64	
SV113DT-N	100	100	-	2" Hub	#14-1/0	(4) #14-1/0	#14-1/0	25	23	8-31/64	
SV213DT-Q	200	200	-	3" Hub	#6-250	(4) #6-250	#6-250	36-3/4	23	8-31/64	
SV213DT-T	200	200	-	HO (LG)	#6-250	(4) #6-250	#6-250	36-3/4	23	8-31/64	
SV213DT-U	200	200	-	HCP (LG)	#6-250	(4) #6-250	#6-250	36-3/4	23	8-31/64	
SV213DT-V	200	200	-	2-1/2" Hub	#6-250	(4) #6-250	#6-250	36-3/4	23	8-31/64	
*SV413DT-Q	400	400	N/A	3" Hub	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-3/4	
*SV413DT-R	400	400	N/A	3-1/2" Hub	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-3/4	
*SV413DT-T	400	400	N/A	HO (LG)	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-3/4	
*SV413DT-U	400	400	N/A	HCP (LG)	(2) #6-350	(4) #6-350	(2) #6-350	48	28	11-3/4	
*SV613DT-TT	600	600	N/A	(2) HO (LG)	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	33-1/2	15-1/4	
*SV613DT-VV	600	600	N/A	(2) HCP (LG)	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	56-1/2	33-1/2	15-1/4	

50 Amp Twist Lock Male Receptacle: ARP00176



- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


Hub / Top Configuration	Catalog Suffix	Hub / Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Switches are double pole/double throw with center off position.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors.
- *110 units have removable bolted cover plate for receptacle on the bottom.
- **Does not have provisions for twist lock 50 Amp receptacle.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the noted units.
- G-90 galvanized steel.
- NEMA 3-R enclosures.


Concentric Knockout	
CC	3-1/2, 3, 2-1/2, 2
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
KK	2-1/2, 2
UU	1/2
VV	5/16

Meter Socket Pad Mount Generator Transfer Switches


4, 5 & 6 Jaw | 200, 320, 400, 600 & 800 Ampere | Single Phase | 120/240 VAC

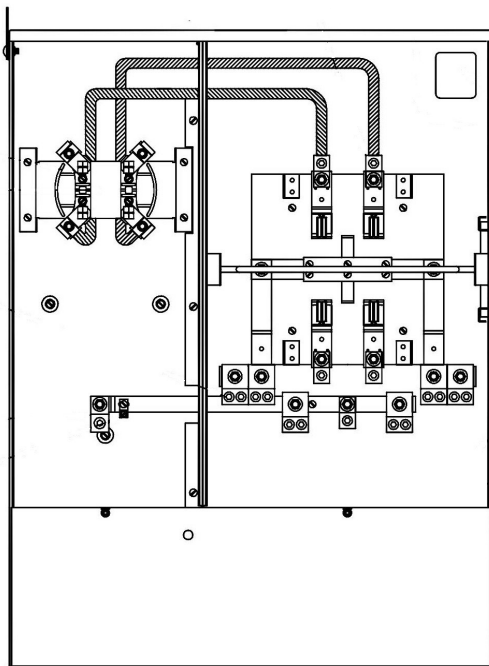

PCV210DT

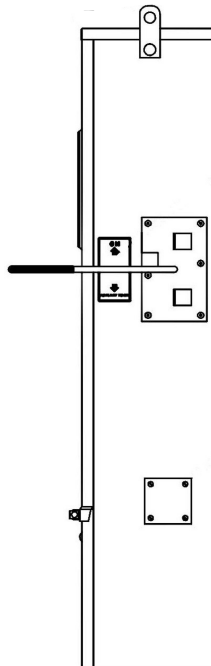

PCV211DT

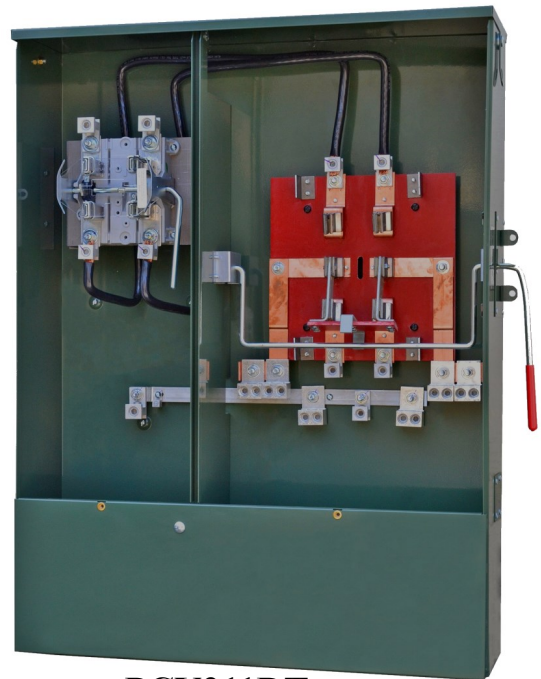

200 Ampere - Pad Mount - 4 Jaw - Self Contained - Ringless Style - Meter Socket/Switches													
Catalog Number	Ground Sleeves Catalog #	#Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
								Line	Load		H"	W"	D"
PCV210DT	1003711	4	2S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	40	30	8-15/64
PCV210DTR	1003711	4	2S	N/A	200	200	yes	#6-350	(4) #6-250	50 Amp Rec.	40	30	8-15/64
200 & 320 Ampere - Pad Mount - 4 Jaw - Self Contained - Lever Bypass - Ringless Style - Meter Socket/Switches													
PCV211DT	1003711	4	2S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	40	30	8-15/64
PCV310DT	1003743	4	2S	N/A	320	320	-	(2) #6-350	(4) #6-350	(2) #6-350	46-1/2	32	11-1/4
PCV310DTR	1003743	4	2S	N/A	320	320	yes	(2) #6-350	(4) #6-350	50 Amp Rec.	46-1/2	32	11-1/4
200 & 400 Ampere - Pad Mount - 5 Jaw - Transformer Rated - Auto Circuit Closing - Ring Style - Meter Socket/Switches													
PCV212DT	1003711	5	3S	100/100:5	200	200	-	#6-350	(4) #6-250	#6-250	40	30	8-15/64
PCV212DTR	1003711	5	3S	100/100:5	200	200	yes	#6-350	(4) #6-250	50 Amp Rec.	40	30	8-15/64
PCV410DT	1003743	5	3S	200/200:5	400	400	-	(2) #6-350	(4) #6-350	(2) #6-350	46-35/64	32	11-1/4
PCV410DTR	1003743	5	3S	200/200:5	400	400	yes	(2) #6-350	(4) #6-350	50 Amp Rec.	46-35/64	32	11-1/4
*PCV610DT	1003713	5	3S	300/300:5	600	600	N/A	(2) #4-500 (3) #6-350	(1) #4-500 (2) #4-500 (3) #6-350	(2) #4-500	58-9/16	36-7/8	15-1/4
800 Ampere - Pad Mount - 6 Jaw - Transformer Rated - Lever Bypass - Ringless Style - Meter Socket/Switches													
*PCV810DT	1003846	6	4S	(2) 400:5	800	400	N/A	(2) #4-600 (2) #4-600	(8) #6-350	(2) #6-350	48-3/4	40-1/16	11-5/8

50 Amp Twist Lock Male Receptacle: ARP00176




- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

- Switches are double pole/double throw with center off position.
- Optional burial ground sleeves are fabricated from 14 Ga. G-90 galvanized steel and have an oven cured powder polyester paint finish.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for 610 or 810 units.)
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Order catalog #ARP01724 to convert PCV810DT from pad mount to wall mount.
- Units shipped without receptacles have a removable bolted cover plate except for the 610 and 810 units.
- G-90 galvanized steel, NEMA 3R enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Meter Socket Pad Mount Generator Transfer Switches


4, 5 & 6 Jaw | 200 Ampere | Single Phase | 480 VAC

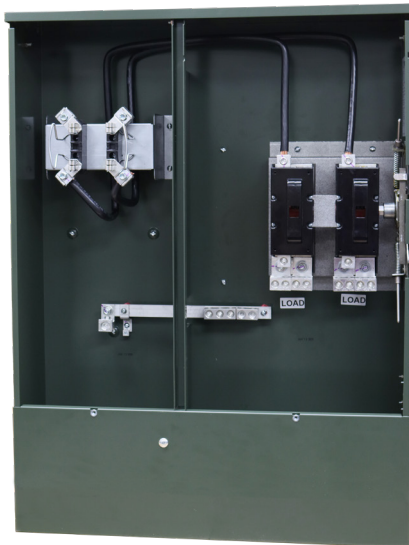


PCX210DT



PCX211DT

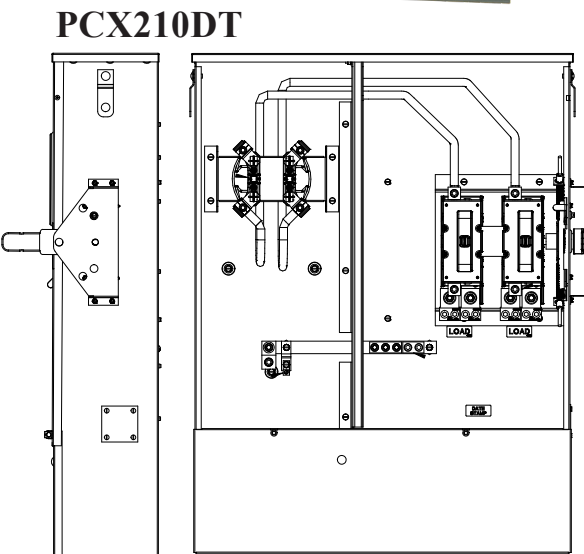

PCX210DTR

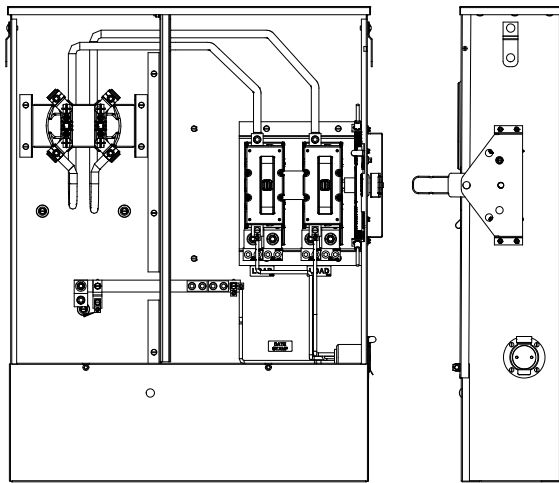

200 Ampere - Pad Mount - 4 Jaw - Self Contained - Ringless Style - Meter Socket/Switches													
Catalog Number	Ground Sleeves Catalog #	#Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
								Line	Load		H"	W"	D"
PCX210DT	1003711	4	2S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	40	30	8-15/64
PCX210DTR	1003711	4	2S	N/A	200	200	yes	#6-350	(4) #6-250	50 Amp Rec.	40	30	8-15/64
PCX211DT	1003711	4	2S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	40	30	8-15/64

**50 Amp Twist Lock
Male Receptacle: ARP00176**




- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177


- Switches are double pole/double throw with center off position.
- Optional burial ground sleeves are fabricated from 14 Ga. G-90 galvanized steel and have an oven cured powder polyester paint finish.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for 610 or 810 units.)
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- G-90 galvanized steel, NEMA 3R enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Meter Socket Pad Mount Generator Transfer Switches


7 & 13 Jaw | 200, 400 & 600 Ampere | Three Phase | 120/240 VAC

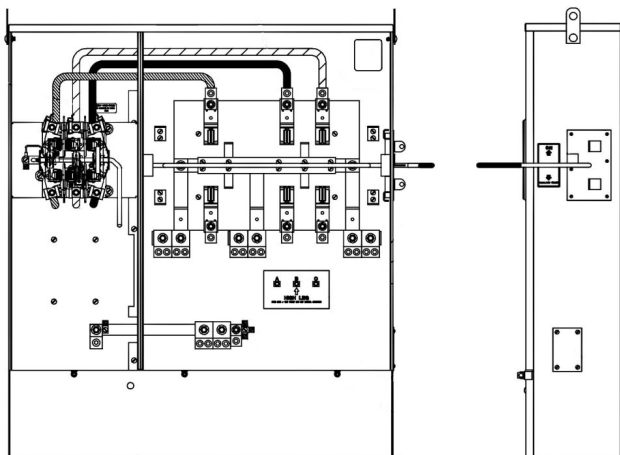


PCV223DT

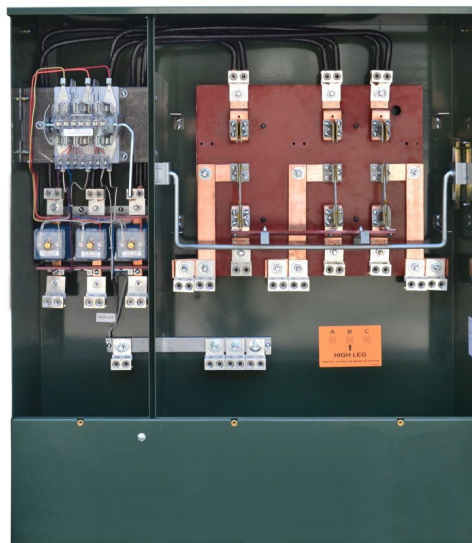

PCV423DT

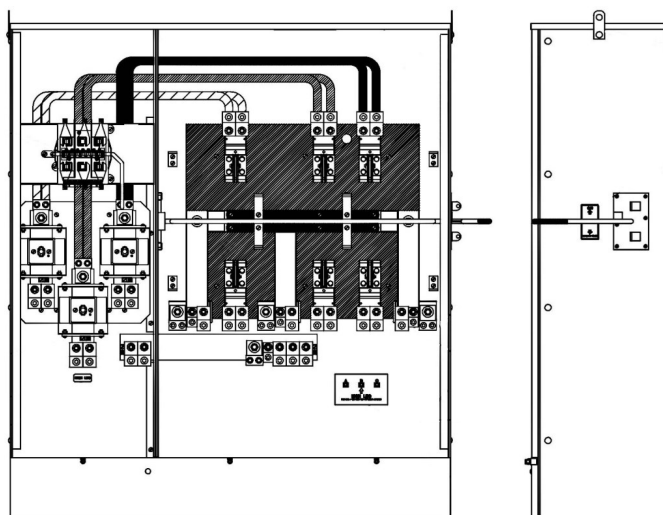

PCV623DT

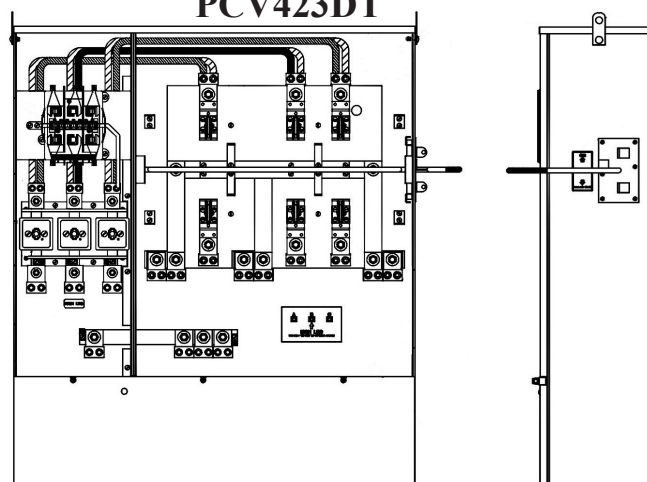

PCV423DT

200 Ampere - Pad Mount - 4 Jaw - Self Contained - Ringless Style - Meter Socket/Switches													
Catalog Number	Ground Sleeves Catalog #	#Jaws	Meter Form	Current Transformer Ratio	Main Rating Amps	Auxil. Rating Amps	With 50 Amp Receptacle	Wire Size CU-AL		Auxiliary Connectors	Dimensions		
								Line	Load		H"	W"	D"
PCV223DT	1003712	7	15S	N/A	200	200	-	#6-350	(4) #6-250	#6-250	40	35-3/64	8-31/64
200 & 400 Ampere - Pad Mount - 5 Jaw - Transformer Rated - Auto Circuit Closing - Ringless Style - Meter Socket/Switches													
PCV233DT	1003712	13	8S	(3) 200:5	200	200	-	#6-350	(4) #6-250	#6-250	40	35-3/64	8-31/64
*PCV423DT	1003846	13	8S	(3) 400:5	400	400	N/A	(2) #6-350	(4) #6-350	(2) #6-350	46-9/16	40-1/16	11-5/8
*PCV623DT	1003714	13	8S	(3) 400:5	600	600	N/A	(2) #4-500	(1) #4-500 (3) #6-350	(2) #4-500	57	50	15/1/4

**50 Amp Twist Lock
Male Receptacle: ARP00176**




- Field Installable 50 Amp Twist Lock Male and Female Receptacles.
Male Receptacle: ARP00176
Female Receptacle: ARP00177

- Switches are double pole/double throw with center off position.
- Optional burial ground sleeves are fabricated from 14 Ga. G-90 galvanized steel and have an oven cured powder polyester paint finish.
- Add suffix "R" to catalog number for 50 Amp locking-type male receptacle installed & prewired to auxiliary connectors. (Not available for 423 or 623 units).
- *Does not have provisions for twist lock receptacle.
- Units with male receptacles are limited to 50 Amps (12KW) auxiliary input.
- Units shipped without receptacles have a removable bolted cover plate except for the 423 and 623 units.
- G-90 galvanized steel, NEMA 3R enclosures.

Meter Pedestals - Direct Burial

100, 200 & 320 Ampere | Single Phase | 1, 2 & 3 Position

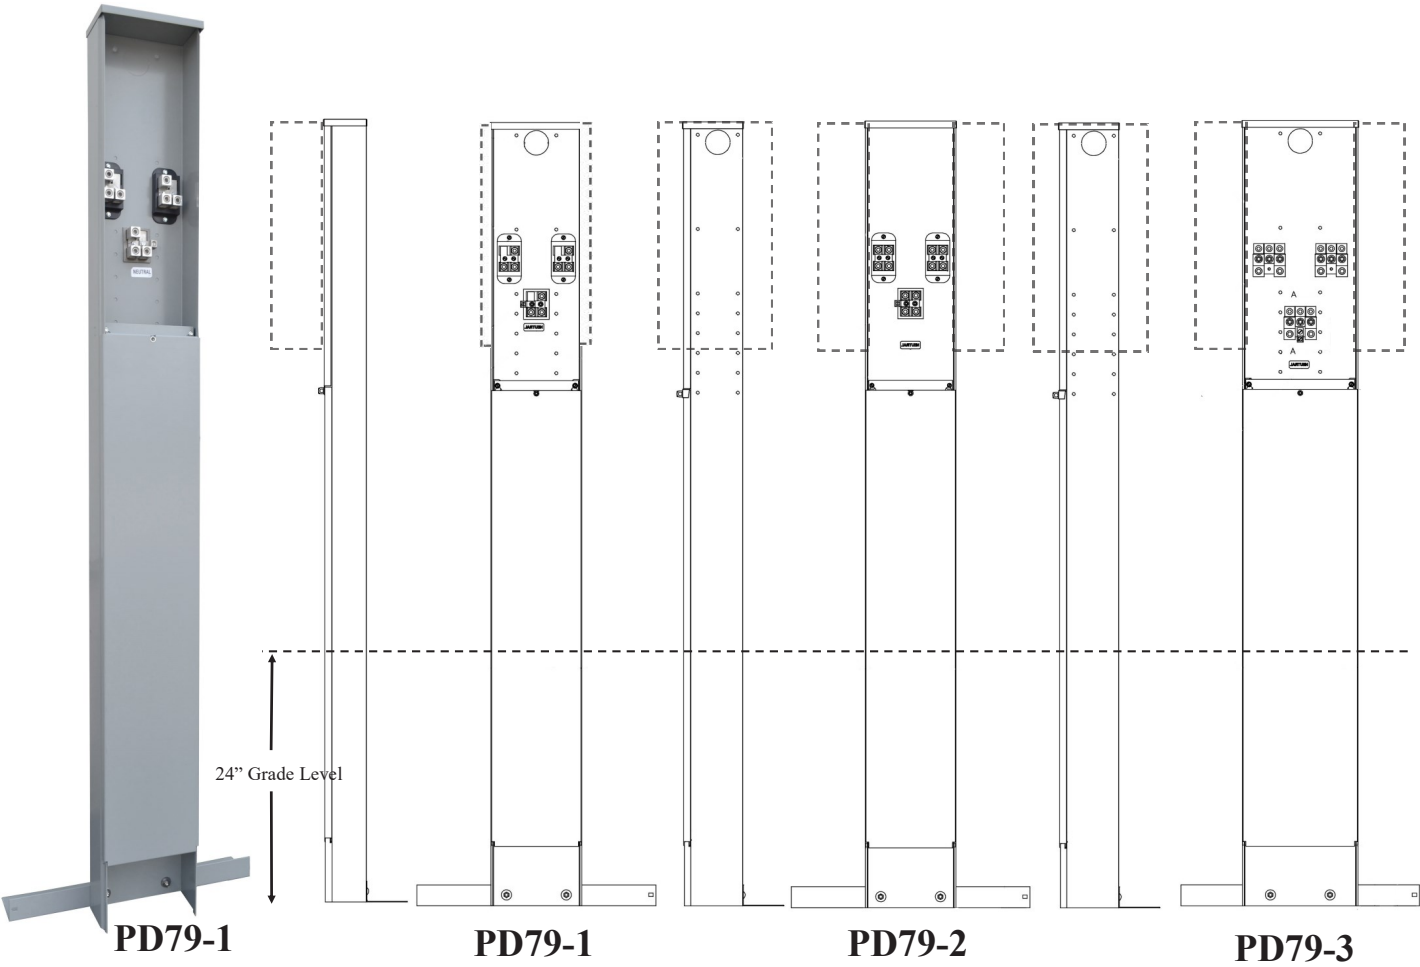

Catalog Number	# Positions	Dimensions			Terminals Wire Size CU-AL		Grade Line From Bottom Of Stabilizer Foot
		H"	W"	D"	Line	Subfeed	
PD60-1	1	60	9	4	#6-350	#6-250	24"
PD60-2	2	60	9	5-3/4	#6-350	#6-250	24"
PD60-3	3	60	11-1/2	5-3/4	#6-350	#6-250	24"
PD79-1	1	79	9	4	#6-350	#6-250	24"
PD79-2	2	79	9	5-3/4	#6-350	#6-250	24"
PD79-3	3	79	11-1/2	5-3/4	#6-350	#6-250	24"
PD96-1	1	96	9	4	#6-350	#6-250	36"
PD96-2	2	96	9	5-3/4	#6-350	#6-250	36"
PD96-3	3	96	11-1/2	5-3/4	#6-350	#6-250	36"


- All pedestals have removable bottom covers to allow lay-in wiring.
- Single Phase, 3-wire, 480 VAC.
- All line terminals are 350 MCM CU-AL, all sub-feed terminals are 250 MCM CU-AL.
- Stabilizer foot shipped inside unit.
- PD96 units ship as 2 pieces.
- G-90 galvanized steel.
- NEMA 3R enclosures.
- Units are painted gray.

The following units are designed for “no-drill” mounting to the PD series pedestals.

Type of Unit	Ratings	Catalog Number
Meter Sockets	100 Amp	PDMS100
	200 Amp	PDMS200
Socket Breakers	100 Amp	See Page 21
	200 Amp	See Page 22, 23
	300 Amp	See Page 24

Meter Pedestals - Direct Burial


320 Ampere Socket Breaker Units | UHC344M3T, UHC344N5T, UHC364N4T & 1011455A

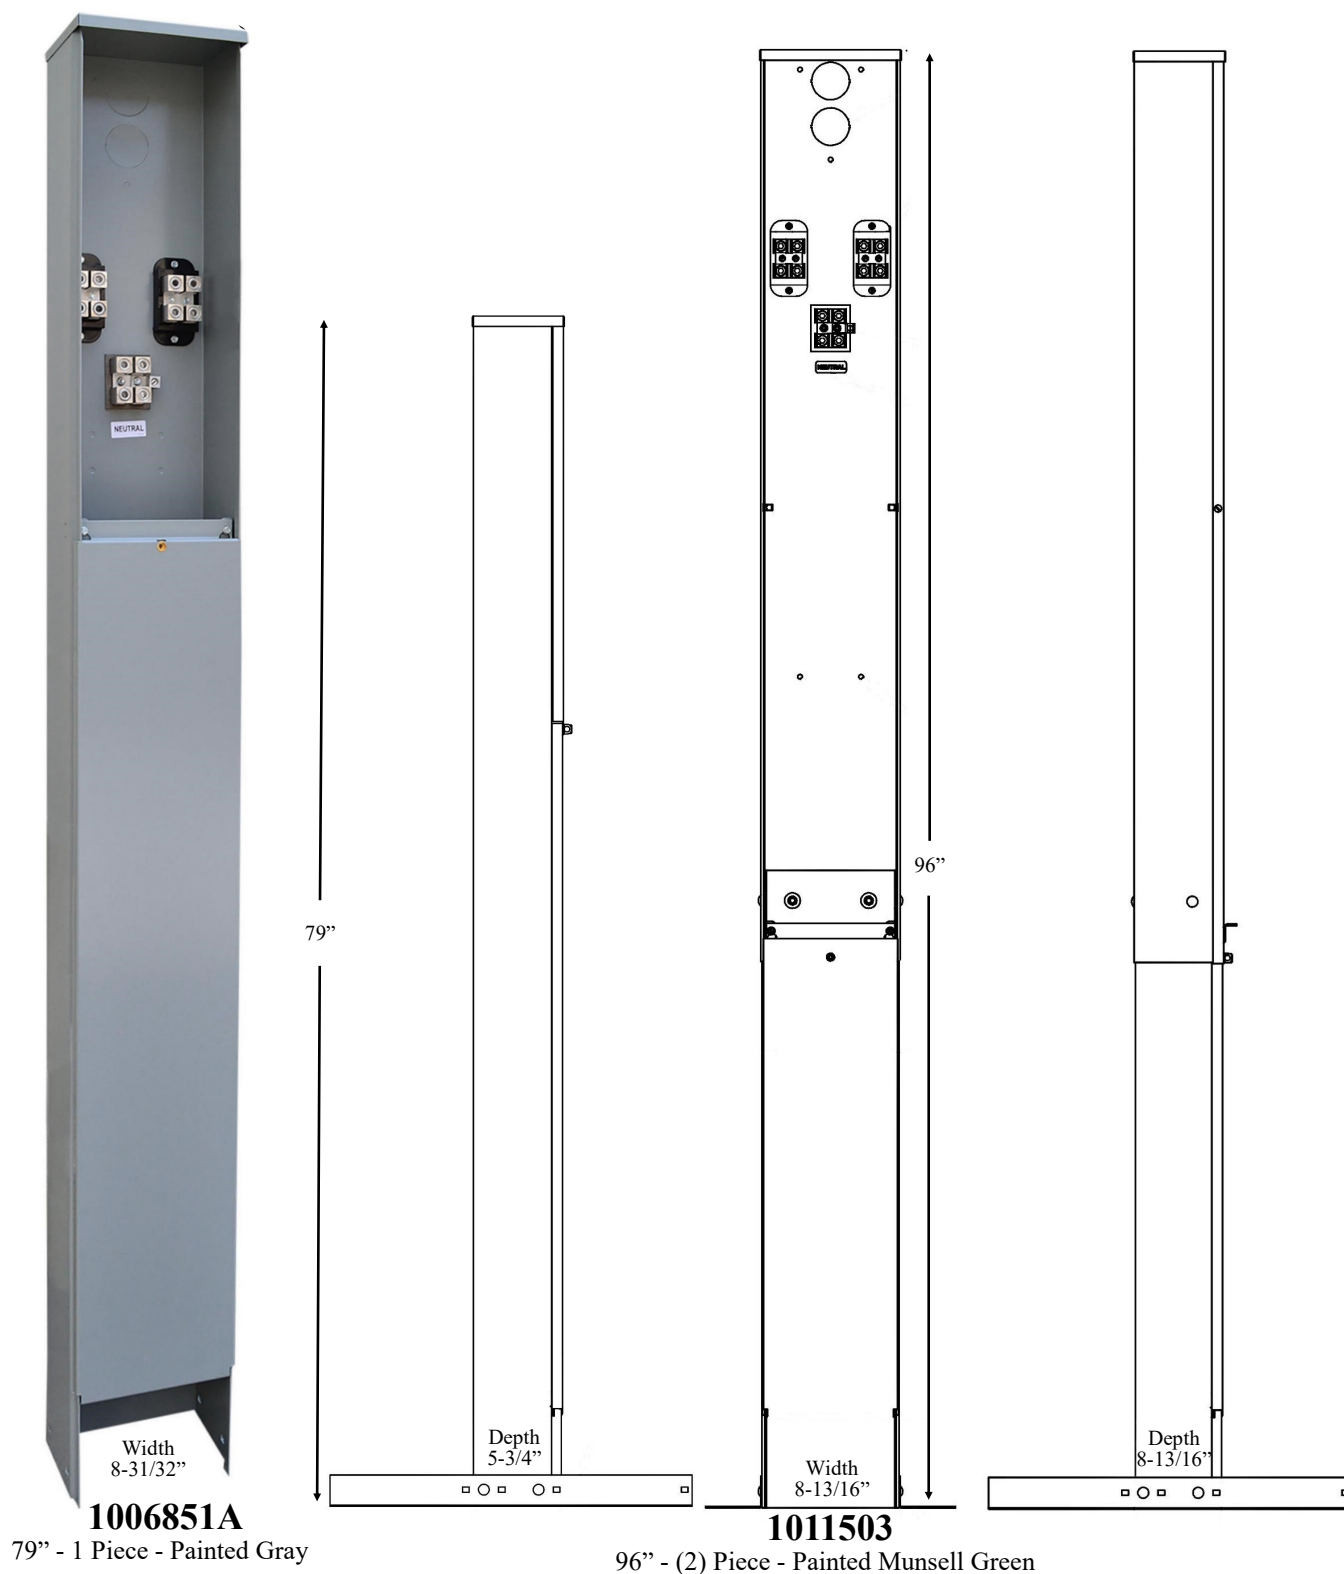

- Pedestals for 320 ampere socket breaker units UHC344M3T, UHC344N5T, HC364N4T & 1011455A.
- Pedestals have removable bottom covers to allow lay-in wiring.
- All line terminals are 350 MCM CU-AL, all sub-feed terminals are 250 MCM CU-AL.
- 1011503 ships as two pieces.
- Stabilizer foot shipped inside unit.
- G-90 galvanized steel, NEMA 3R enclosures.

Meter Pedestals - Direct Burial

4 Jaw | 200 Ampere | Ringless | 600 VAC

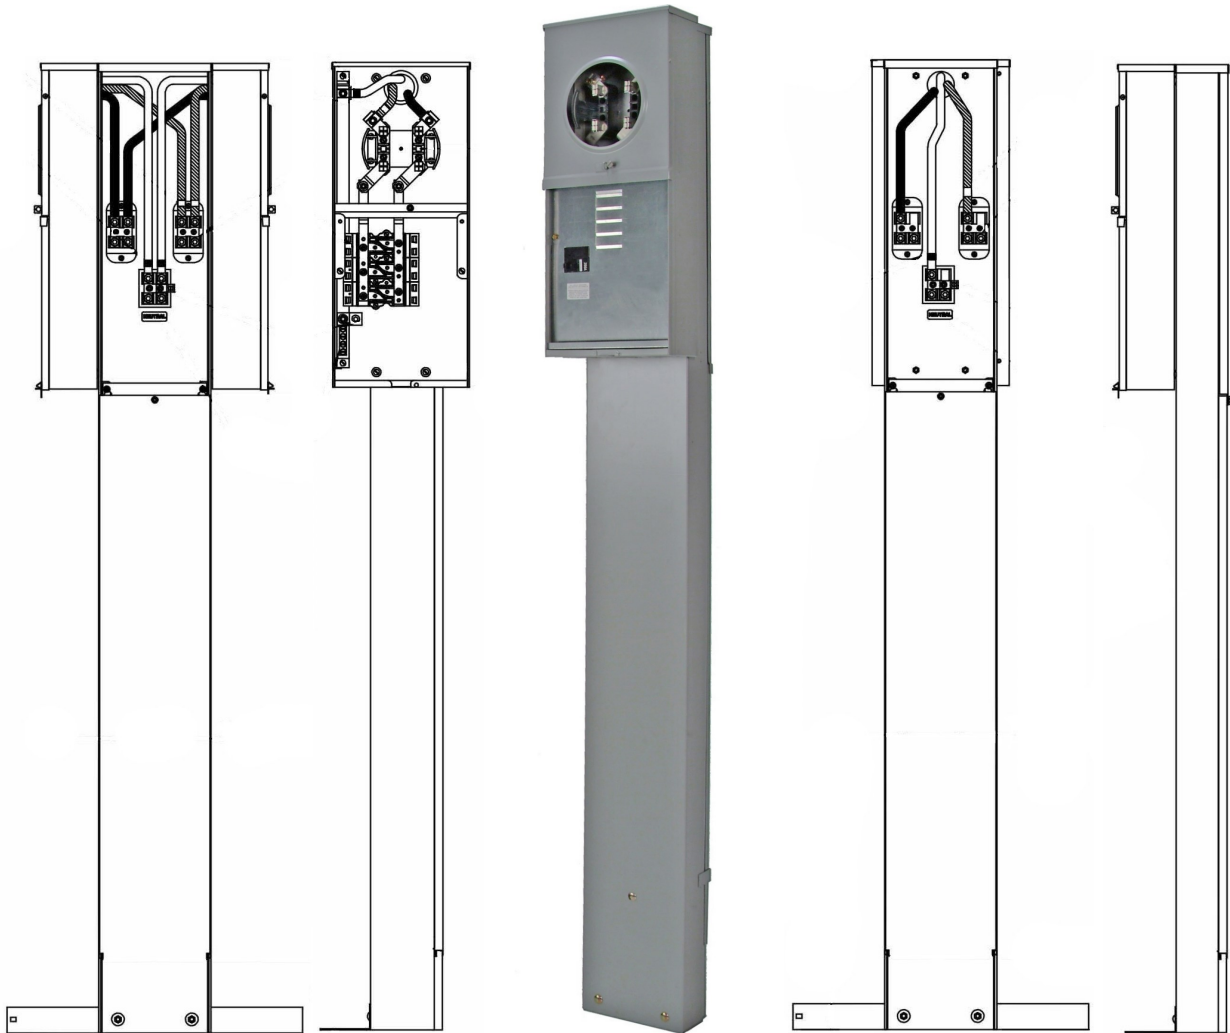

P7922S260W1
Provisions For 200 Amp
Plug-In Main Breaker

P7911S262W1
200 Amp Plug-In
Main Breaker Installed



Meter Socket Bottom KO's

Catalog Number	# Positions	Plug-In Breaker Installed	Provisions For Additional Plug-In Breakers	Maximum Amperage	Dimensions			Terminals Wire Size CU-AL		Grade Line From Bottom Of Stabilizer Foot
					H"	W"	D"	Line	Subfeed	
P7911S262W1	1	2 Pole 200 Amp	* (2) 2-Pole	200	79	9	4	(2) #6-350	#6-250	24"
P7922S262W1	2	2 Pole 200 Amp	* (2) 2-Pole	200	79	9	5-3/4	(2) #6-350	#6-250	24"
P7911S260W1	1	** Provisions For 2 Pole	* (2) 2-Pole	200	79	9	4	(2) #6-350	#6-250	24"
P7922S260W1	2	** Provisions For 2 Pole	* (2) 2-Pole	200	79	9	5-3/4	(2) #6-350	#6-250	24"

- **Units with provisions for 2-pole main plug-in breaker will accept Siemens QN2200R or Cutler-Hammer WBJ2200 breakers.
- *Units with provisions for additional 2-pole plug-in breakers will accept Square-D Type: Hom, Eaton Type: BR, Siemens Type: QP, GE Type: THQL breakers.
- *Additional breaker spaces are connected in a parallel circuit with the main breaker.
- All pedestals have removable bottom covers to allow lay-in wiring.
- G-90 galvanized steel.
- NEMA 3R enclosures.
- Units are painted gray.

Concentric Knockout




HH	2-1/2, 2, 1-1/2, 1-1/4
UU	1/2
VV	5/16

Meter Pedestals - Pad Mount Style


4, 5 & 7 Jaw | 200 Ampere | Single & Three Phase | Lever Bypass | 600 VAC



MPC5

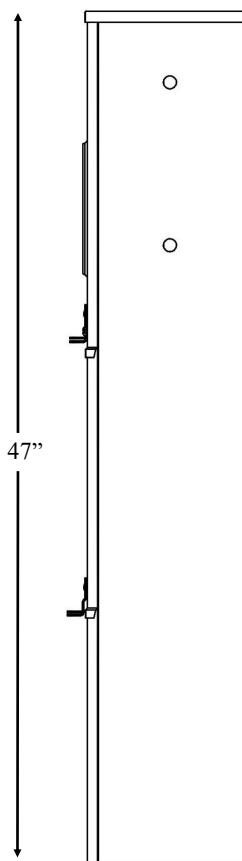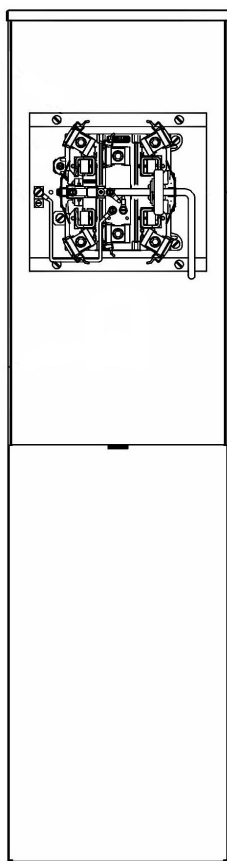

47"




MP207

Catalog Number	Ampacity		#Jaws	Lever Bypass	Phase	Line, Load & Neutral Connectors	Dimensions			Ground Sleeves
	Main	By-Pass					H"	W"	D"	
MPC4	200	100	4	MQ Spring Jaw	Single Phase 3-Wire	#6-300	47	12	5-7/8	1005641
MPC5	200	100	5	MQ Spring Jaw	Single Phase 3-Wire or Network 3-Wire	#6-300	47	12	5-7/8	1005641
MPC7	200	100	7	MQ Spring Jaw	Three Phase 3-Wire	#6-300	47-3/64	12	5-7/8	1005641
MPH4	200	200	4	HQ Jaw Clamping	Single Phase 3-Wire	#6-350	47	12	5-7/8	1005641
MPH5	200	200	4	HQ Jaw Clamping	Single Phase 3-Wire, Network 3-Wire or Three Phase 3-Wire	#6-350	47	12	5-7/8	1005641
MPH7	200	200	5	HQ Jaw Clamping	Three Phase 4-Wire	#6-350	47-3/64	12	5-7/8	1005641
*MP205	200	200	5	HQ Jaw Clamping	Three Phase 3-Wire	#6-350	47	18	8-3/4	1002922
*MP207	200	200	7	HQ Jaw Clamping	Three Phase 4-Wire	#6-350	47	18	8-3/4	1002922


- These lever by-pass pedestals are used to direct meter single and three phase services.
- Designed to mount on individual pads, or burial ground sleeves as well as on enlarged transformer pads with the transformer.
- *MP205 and MP207 series pedestals are wider and pre-Bused for direct wiring.
- G-90 galvanized steel.
- NEMA 3R enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Transformer Rated - Meter Pedestals


4 & 5 Jaw | 320 & 400 Ampere | Single Phase | Self Contained | 600 VAC

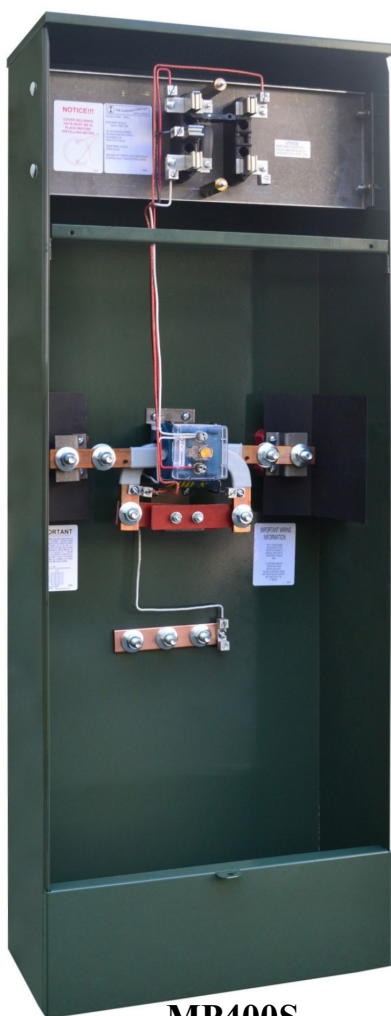

MP400S

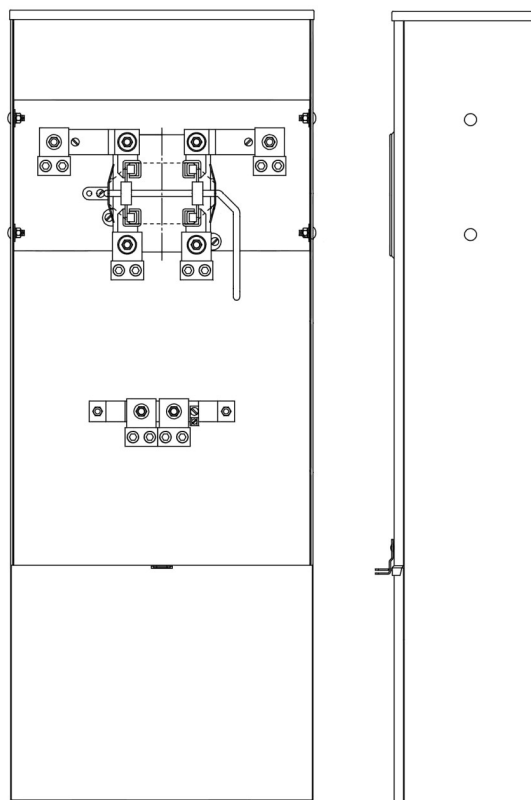

MP320C350




320 Amp - Single Phase - Lever Bypass - Transformer Rated - Self Contained - Ringless - Meter Pedestals									
Catalog Number	Ground Sleeve	Unity Ampacity Amps	Meter Form	#Jaws	Line, Load & Neutral Connections	Connector Kit Dual #6-350	Dimensions		
	Catalog Number						H"	W"	D"
MP320S	1002922	320	2S	4	3/8" Stud	ARP00427	47-3/64	18	8-47/64
MP320C350	1002922	320	2S	4	(2) #6-350	N/A	47-3/64	18	8-47/64

400 Amp - Single Phase - Transformer Rated - Ring Style - Meter Pedestals											
Catalog Number	Ground Sleeve	Unity Ampacity Amps	Meter Form	#Jaws	Current Transformer	Socket Type	Line, Load & Neutral Connections	Connector Kit Dual #6-350	Dimensions		
	Catalog Number								H"	W"	D"
MP400NS	1002922	400	3S	5	200/200:5	Non-Circuit Closing	1/2" Studs	ARP00116	47-7/64	18	8-3/4
MP400S	1002922	400	3S	5	200/200:5	Automatic Circuit Closing	1/2" Studs	ARP00116	47-7/64	18	8-3/4
MP400NC350	1002922	400	3S	5	200/200:5	Non-Circuit Closing	(2) #6-350	N/A	47-7/64	18	8-3/4
MP400C350	1002922	400	3S	5	200/200:5	Automatic Circuit Closing	(2) #6-350	N/A	47-7/64	18	8-3/4

- To convert MP320 & MP400 series pad mount pedestals to direct burial order ground sleeve catalog #1002922.
- G-90 galvanized steel.
- NEMA 3R enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green

Transformer Rated - Meter Pedestals

5, 6, 7, 8 & 13 Jaw | Direct Burial & Pad Mount Style | 600 VAC

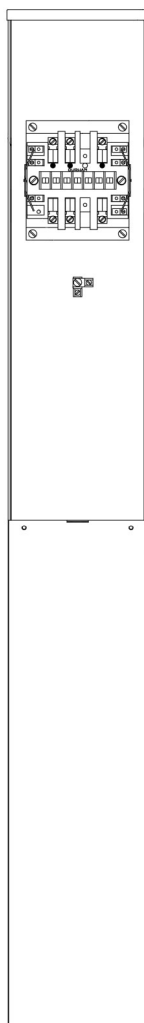

MPE5 Pad Mount

MP013N Direct Burial


Direct Burial for MP0 & MP0R Units With Exposed Meters						
# Jaws	Ringless Style Exposed Meters	Ring Style Exposed Meters	Socket Type	Dimensions		
	Catalog Number	Catalog Number		H"	W"	D"
5	MP05	MP0R5	Auto Circuit Closing	60	8	4-1/2
5	MP05N	MP0R5N	Non-Circuit Closing	60	8	4-1/2
6	MP06	MP0R6	Auto Circuit Closing	60	8	4-1/2
6	MP06N	MP0R6N	Non-Circuit Closing	60	8	4-1/2
7	MP07	MP0R7	Auto Circuit Closing	60	8	4-1/2
7	MP07N	MP0R7N	Non-Circuit Closing	60	8	4-1/2
8	MP08	MP0R8	Auto Circuit Closing	60	8	4-1/2
8	MP08N	MP0R8N	Non-Circuit Closing	60	8	4-1/2
13	MP013	MP0R13	Auto Circuit Closing	60	8	4-1/2
13	MP013N	MP0R13N	Non-Circuit Closing	60	8	4-1/2

Pad Mount				
Enclosed Meter/W Plexiglass Window	Socket Type	Dimensions		
		H"	W"	D"
MPE5	Auto Circuit Closing	46	14-1/2	13
MPE5N	Non-Circuit Closing	46	14-1/2	13
MPE6	Auto Circuit Closing	46	14-1/2	13
MPE6N	Non-Circuit Closing	46	14-1/2	13
MPE7	Auto Circuit Closing	46	14-1/2	13
MPE7N	Non-Circuit Closing	46	14-1/2	13
MPE8	Auto Circuit Closing	46	14-1/2	13
MPE8N	Non-Circuit Closing	46	14-1/2	13
MPE13	Auto Circuit Closing	46	14-1/2	13
MPE13N	Non-Circuit Closing	46	14-1/2	13


- MP0 series pedestals are direct burial.
- To convert pad mount MPE series pedestals to direct burial order ground sleeve catalog #1007581.
- Pedestals with catalog numbers ending with the letter N have non-circuit closing sockets, all other pedestals have automatic circuit devices.
- G-90 galvanized steel, NEMA 3R enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Secondary Connection Cabinets - Pole Or Wall Mount

100, 200 & 1,000 Ampere | Single & Three Phase | 600 VA

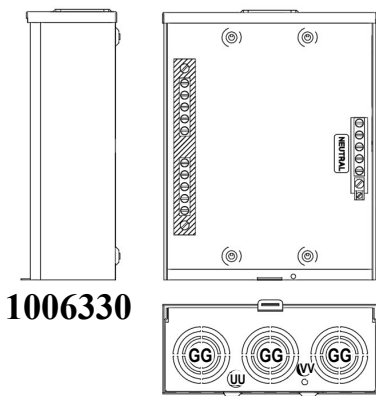


1006330

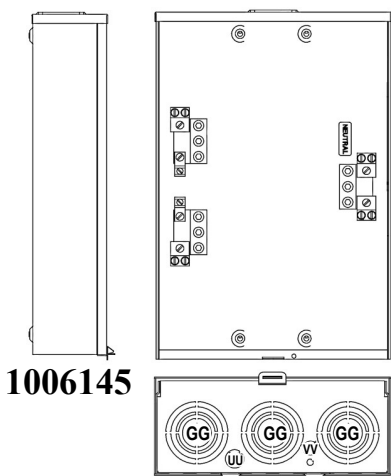


1006145



1006145

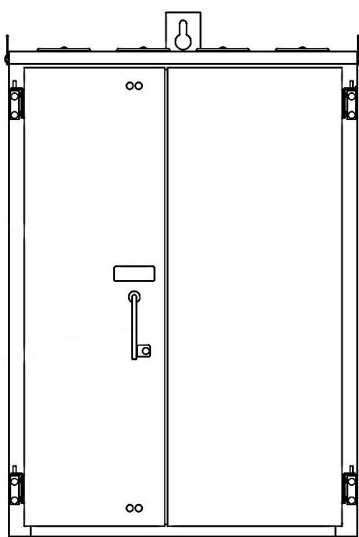

1011729

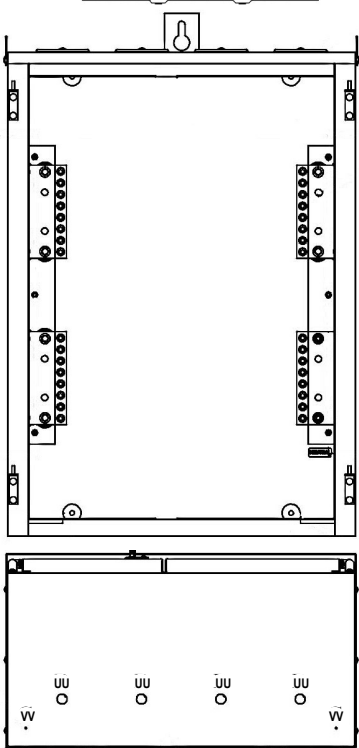

Catalog Number	Phase	Amps	Hub	Wire Size CU-AL Connectors	Dimensions		
					H"	W"	D"
1006330	Single	100	HO	5 Position #14-1/0 (3) Places	14	11	4-23/64
1006145	Single	200	HCP	3 Position #6-250 (3) Places	20-7/8	14	4-3/8
1011729	Three	1000	(4) LG HCP	8-Position #6-350 (4) Places	42	30	15


Hub /Top Configuration	Catalog Suffix
Solid Top	A
For Hub (SM)	B
HCP (SM)	C
1-1/4"	L
1-1/2"	M
2"	N
2-1/2"	P

- Painted gray
- Neutral is permanently bonded to enclosure.
- G-90 galvanized steel.
- NEMA 3R enclosures.
- For hub options see replacement parts & accessory pages.

Concentric Knockout	
GG	2-1/2, 2, 1-1/2, 1-1/4, 1
UU	1/2
VV	5/16

Secondary Connection Pedestals


URD Single & Three Phase | 600 VAC

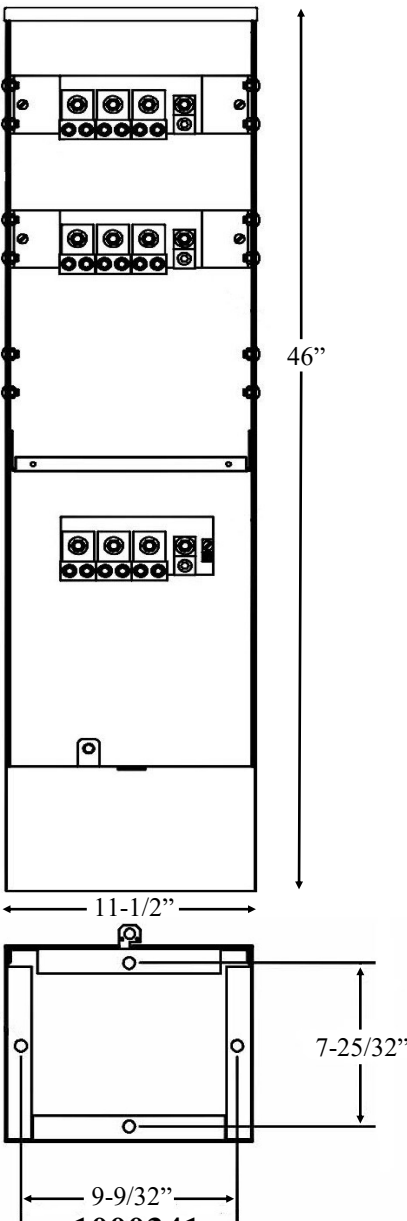

1000341
Single Phase
Pad Mount



1002135
Single Phase
Direct Burial

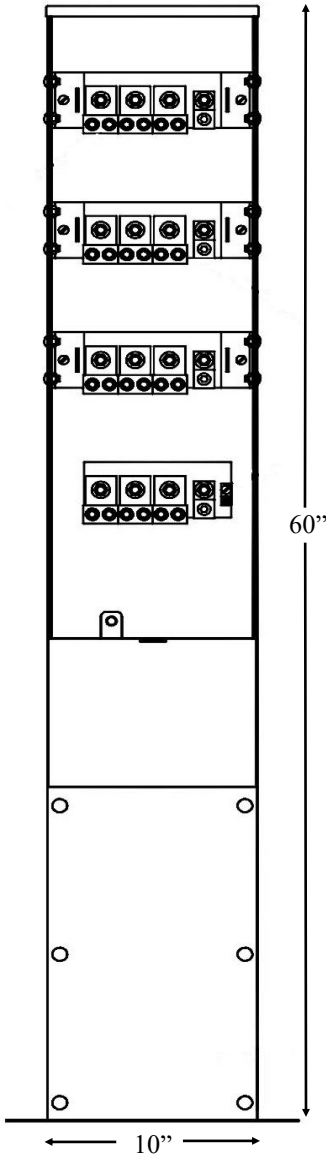

1002681
Three Phase
Direct Burial

Pad Mount Secondary Connection Pedestals					
Phase	Catalog Number	Line, Load & Neutral Connectors	Dimensions		
			H"	W"	D"
1	1000341	(21)#6-250 MCM	46	11-1/2	9

Direct Burial Secondary Connection Pedestals					
Phase	Catalog Number	Line, Load & Neutral Connectors	Dimensions		
			H"	W"	D"
1	1004145	(21) #6-250 MCM CU-AL	60	10	6
1	1002135	(21) #6-250 MCM CU-AL	70	11-1/2	9
3	1002681	(28) #6-250 MCM CU-AL	60	10	6

- Note: To convert 1000341 to direct burial order ground sleeve catalog #1000366.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.
- G-90 galvanized steel, NEMA 3R enclosures.

Pad Mount High Amperage Termination Cabinets - CE Series

1000, 2000, 3000, 4000 & 5000 Ampere | URD Three Phase | 4 Wire | 600 VAC



EZR-ACCESS™ CE Series High Amperage Termination Cabinets

Termination Cabinet With Aluminum Bus						
Base Model Number W/Aluminum Bus	Unit Ampacity Amps	Quantity Of Aluminum Bus Per Phase	UL Label	Dimensions		
				H"	W"	D"
CE605424-10	1000	(1) 1/4" X 5-1/2"	N/A	60	54	24
CE605424-20	2000	(2) 1/4" X 5-1/2"	N/A	60	54	24
*CE605424-30	3000	(4) 1/4" X 5-1/2"	yes	60	54	24
*CE605424-40	4000	(5) 1/4" X 5-1/2"	yes	60	54	24
*CE605424-50	5000	(6) 1/4" X 5-1/2"	yes	60	54	24

Termination Cabinet With Copper Bus						
Base Model Number W/Copper Bus	Unit Ampacity Amps	Quantity Of Copper Bus Per Phase	UL Label	Dimensions		
				H"	W"	D"
CE605424-10-CU	1000	(1) 1/4" X 4"	N/A	60	54	24
CE605424-20-CU	2000	(2) 1/4" X 4"	N/A	60	54	24
*CE605424-30-CU	3000	(3) 1/4" X 4"	yes	60	54	24
*CE605424-40-CU	4000	(4) 1/4" X 4"	yes	60	54	24
*CE605424-50-CU	5000	(5) 1/4" X 4"	yes	60	54	24

Optional Features

- Special Paint Color
- Stainless Steel Enclosure, IEEE C57.12.29
- Anti-Condensation Compound
- Ground Sleeve
- Lug and Hardware Kits

Optional Lug Kits For Phase And Neutral Connections				
Lug Kit Catalog Number	Connectors Per Kit	Wires Range	Wires Per Connector	Torque (LB - IN)
DLK-X8660N2	4	300-750 KCMIL	1	500
DLK-X8656N2	4	#2-600 KCMIL	1	500
DLK-X8659N2	4	1/0-750 KCMIL	2	500
DLK-X8655N2	4	#6-350 KCMIL	2	275
Hardware Kit For Mounting Lugs				Torque (LB-IN)
DLK-X3083N2				(1) Hardware Kit For Mounting (4) Lugs 550

- 1000 through 5000 Ampere - *UL Listed (3000 Through 5000 Ampere).
- Conforms To IEEE C57.12.28 Enclosure Integrity.
- Copper or Aluminum Bus Bars - Standard NEMA Hole Pattern - Aluminum 1/4" X 5-1/2" - Copper 1/4" X 4".
- 85,000 SCCR.
- #4-600MCM CU-AL Equipment Ground Connector.
- NEMA 3R Enclosures.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.
- 12 Ga. G-90 Galvanized Steel.
- Ventilation to Minimize Condensation.
- Removable Lift Provisions.
- Cautionary Exterior and Interior Labels.



Pad Mount High Amperage Termination Cabinets


4,000 Ampere | With Lay-In Style Connectors | Three Phase | 600 VAC




1012007



Easy Access Doors
On Front And Back

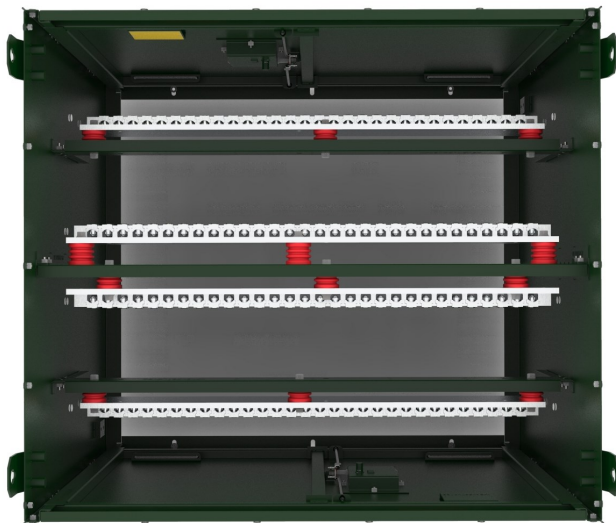

Top View Roof Removed

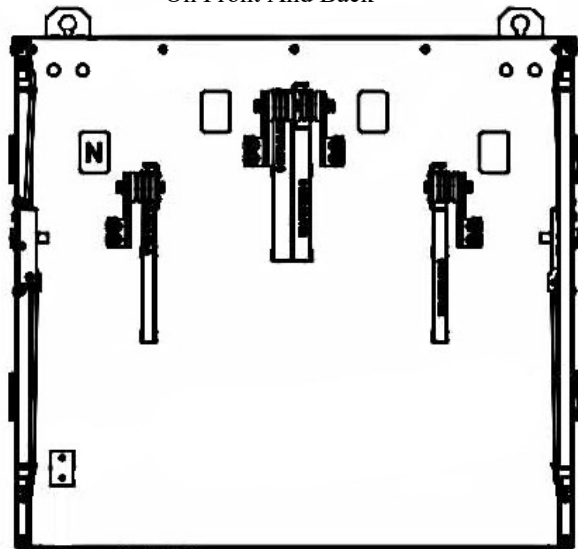

End View Drawing

4000 Ampere Secondary Connection Cabinet					
Phase	Catalog Number	Line, Load & Neutral Connecors	Dimensions		
			H"	W"	D"
3	1012007	(30) Per Phase - #2-750MCM CUL	44	54	48

Standard Features

- 3 Phase, 4 Wire, 600 Volts.
- 4000 Amperes.
- Conforms to IEEE C57.27.28 Integrity.
- (30) Position #2-750MCM CU7AL Lay-In Connectors per Phase including Neutral Bar.
- Torque Connectors #2-4/0 = 250 inch - Lb., Torque 250-750MCM = 350 inch - Lb.
- Supplied with Polypropylene Covers for each Connector Bar.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.
- 12 Ga. G-90 Galvanized Steel.
- Recessed 3-Point Locking Mechanism with Captive Silicon Bronze or Stainless Steel Penta Bolt.
- Supplied with Anodized Aluminum Nameplate inside of Right Door.
- Phase Identification Labels (8) Places.
- Stainless Steel Exterior Hardware.
- Domed Roof.

Pad Mount Primary Sectionalizing Pedestals - AM Series


200/600 Ampere | Single & Three Phase | 15, 25 & 35 KV | 2 Through 4-Way Junctions




AM303018221-3



AM306018226-D

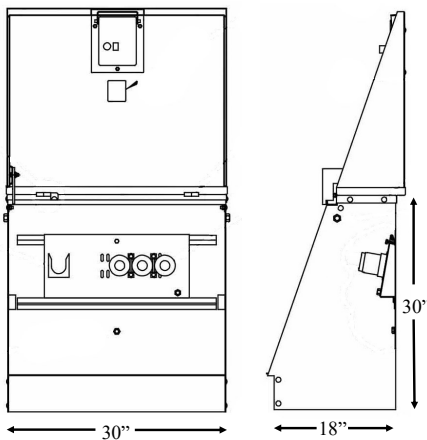

AM303018221-3

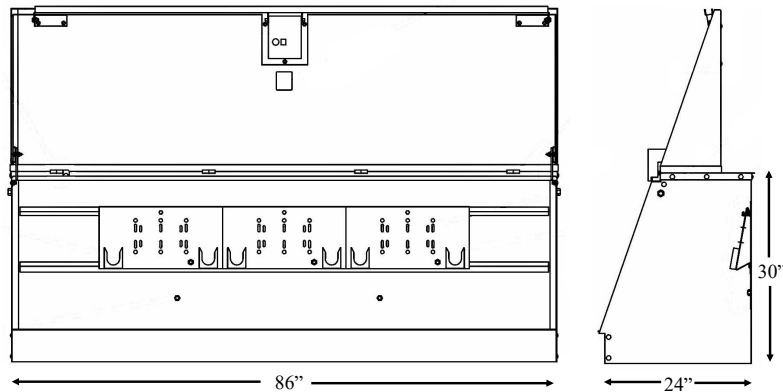

AM308624266-Γ

Standard Features

- 14 or 12 Ga. G-90 Galvanized Steel.
- Stainless Steel Hardware.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.
- Stainless Steel Ground Nuts.
- Conforms to IEEE C57.27.28 Integrity.
- Positive Alignment Penta-Bolt/Latching Design.
- Lift Out Module Mounting Plates.
- Module Plates Painted Gray.

Optional Features

- Warning Labels.
- ANSI Warning Labels.
- Special Paint Color.
- Aluminum Enclosure.
- Stainless Steel Enclosure.
- Stainless Steel Parking Stands.
- Anti-Condensation Compound.
- Ground/Tank Connectors.
- Ground Bus.
- Ground Mounting Sleeves.
- Module/Junctions Factory Installed.

Pad Mount Primary Sectionalizing Pedestals - AM Series

200 Through 600 Ampere | 15, 25 & 35 KV | Single Phase

Single Phase												
Catalog Number	Phase	Maximum *KV Rating	Amperage Rating	Modules Installed	#Parking Stands	Gauge Of Steel	Aluminum Enclosure	Dimensions			Optional Ground Sleeve	
								H"	W"	D"	Steel	Fiberglass
AM302422221	1	15/25 KV	200 Amp	-	1	14 GA.	-	30	24	22	GS202422W	GS182422F
AM302615121	1	15 KV	200 Amp	-	1	14 GA.	-	30	26	15	GS202615W	GS182615F
AM302615121-3	1	15 KV	200 Amp	3-Way 200 Amp	1	14 GA.	-	30	26	15	GS202615W	GS182615F
AM302615121A	1	15 KV	200 Amp	-	1	-	yes	30	26	15	GS202615W	GS182615F
AM302615122	1	15 KV	200 Amp	-	2	14 GA.	-	30	26	15	GS202615W	GS182615F
AM302615122-3	1	15 KV	200 Amp	3-Way 200 Amp	2	14 GA.	-	30	26	15	GS202615W	GS182615F
AM302618121-W	1	15 KV	200 Amp	-	1	12 GA.	-	30	26	18	GS202618W	GS182618F
AM302618222	1	25 KV	200 Amp	-	2	14 GA.	-	30	26	18	GS202618W	GS182618F
AM302618222-4	1	15 KV	200 Amp	4-Way 200 Amp	2	14 GA.	-	30	26	18	GS202618W	GS182618F
AM302618222-7	1	25 KV	200 Amp	4-Way 200 Amp	2	14 GA.	-	30	26	18	GS202618W	GS182618F
AM303015121	1	15 KV	200 Amp	-	1	14 GA.	-	30	30	15	GS203015W	GS183015F
AM303015122	1	15 KV	200 Amp	-	2	14 GA.	-	30	30	15	GS203015W	GS183015F
AM303015122-4	1	15 KV	200 Amp	4-Way 200 Amp	2	14 GA.	-	30	30	15	GS203015W	GS183015F
AM303015122-LW4	1	15 KV	200 Amp	4-Way 200 Amp	2	12 GA.	-	30	30	18	GS203018W	GS183018F
AM303018122-MPW	1	15 KV	200 Amp	-	2	12 GA.	-	30	30	18	GS203018W	GS183018F
AM303018221	1	15/25 KV	200 Amp	-	1	14 GA.	-	30	30	18	GS203018W	GS183018F
AM303018221-3	1	15 KV	200 Amp	3-Way 20 Amp	1	14 GA.	-	30	30	18	GS203018W	GS183018F
AM303018221-A	1	15/25 KV	200 Amp	-	1	-	yes	30	30	18	GS203018W	GS183018F
AM303018221-W	1	15/25 KV	200 Amp	-	1	12 GA.	-	30	30	18	GS203018W	GS183018F
AM303018222	1	15/25 KV	200 Amp	-	2	14 GA.	-	30	30	18	GS203018W	GS183018F
AM303018222-7	1	25 KV	200 Amp	4-Way 200 Amp	2	14 GA.	-	30	30	18	GS203018W	GS183018F
AM303018222A	1	15/25 KV	200 Amp	-	2	-	yes	30	30	18	GS203018W	GS183018F
AM303022122-MP	1	15 KV	200 Amp	-	2	14 GA.	-	30	30	22	GS203022W	GS183022F
AM303022261	1	15/25 KV	200/600 Amp	-	1	14 GA.	-	30	30	22	GS203022W	GS183022F
AM303022261-W	1	15/25 KV	200/600 Amp	-	1	12 GA.	-	30	30	22	GS203022W	GS183022F
AM303022262	1	15/25 KV	200/600 Amp	-	2	14 GA.	-	30	30	22	GS203022W	GS183022F
AM303023262-A	1	15/25 KV	200/600 Amp	-	2	-	yes	30	30	23	GS203023W	GS183023F
AM303024262	1	15/25 KV	200/600 Amp	-	2	14 GA.	-	30	30	24	GS203024W	GS183024F

Industry Standard IEEE 386 2 Thru 4-Way Small Interface Junctions - "Max Design" 15/25 KV 200/600 Amp, 15/25KV 200 Amp.

Contact factory for compatibility on special mixed multi-Point "custom" molded type or Large Interface Junctions.

Contact the factory for KV35 information.

- *Note: 25 KV 200 ampere units will accept some 200 ampere 35KV rated junctions, contact factory for details.
- 25KV units will accommodate 15KV modules and 600 ampere units will accommodate 200 ampere modules.
- -W equals 12Ga. steel - Western Underground approved.
- Contact factory for 2, 3 & 4-way 600 ampere modules.
- G-90 galvanized steel.
- Conforms to IEEE C57.27.28 Integrity.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Units supplied with modules from the factory have the below added digits.

2-Way 15 KV, 200 Amp = 2
 3-Way 15 KV, 200 Amp = 3
 4-Way 15 KV, 200 Amp = 4
 4-Way 15 KV, 200 Amp = 5

2-Way 25 KV, 200 Amp = 5
 3-Way 25 KV, 200 Amp = 6
 4-Way 25 KV, 200 Amp = 7

Pad Mount Primary Sectionalizing Pedestals - AM Series

200 Through 600 Ampere | 15, 25 & 35 KV | Three Phase

Three Phase												
Catalog Number	Phase	Maximum *KV Rating	Amperage Rating	Modules Installed	#Parking Stands	Gauge Of Steel	Aluminum Enclosure	Dimensions			Optional Ground Sleeve	
								H"	W"	D"	Steel	Fiberglass
AM304815122	3	15 KV	200 Amp	-	2	14 GA.	-	30	48	15	GS204815W	GS184815F
AM304815122-4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	2	14 GA.	-	30	48	15	GS204815W	GS184815F
AM304818122	3	15/25 KV	200 Amp	-	2	14 GA.	-	30	48	18	GS204818W	GS184818F
AM304818122-6	3	25 KV	200 Amp	(2) 3-Way 200 Amp	2	14 GA.	-	30	48	18	GS204818W	GS184818F
AM304818223-A	3	15/25 KV	200 Amp	-	3	-	yes	30	48	18	GS204818W	GS184818F
AM304818223-D	3	15/25 KV	200 Amp	-	3	14 GA.	-	30	48	18	GS204818W	GS184818F
AM304818223-W	3	15/25 KV	200 Amp	-	3	12 GA.	-	30	48	18	GS204818W	GS184818F
AM304822262	3	15/25 KV	200/600 Amp	-	3	14 GA.	-	30	48	22	GS204822W	GS184822F
AM306015123	3	15 KV	200 Amp	-	3	14 GA.	-	30	60	15	GS206015W	GS186015F
AM306015126-D	3	25 KV	200 Amp	-	6	14 GA.	-	30	60	15	GS206015W	GS186015F
AM306015126-D4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	6	14 GA.	-	30	60	15	GS206015W	GS186015F
AM306015126-A	3	15 KV	200 Amp	-	3	-	yes	30	60	18	GS206015W	GS186015F
AM3060181236-P	3	15 KV	200 Amp	-	3	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018123-W4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	3	12 GA.	-	30	60	18	GS206018W	GS186018F
AM306018124	3	15 KV	200 Amp	-	4	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018124-3	3	15 KV	200 Amp	(3) 3-Way 200 Amp	4	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018124-4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	4	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018124-AM	3	15 KV	200 Amp	-	4	-	yes	30	60	18	GS206018W	GS186018F
AM306018124-MW	3	15 KV	200 Amp	-	4	12 GA.	-	30	60	18	GS206018W	GS186018F
AM306018124-DW	3	15/25 KV	200 Amp	-	6	12 GA.	-	30	60	18	GS206018W	GS186018F
AM306018226-D6	3	25 KV	200 Amp	(3) 3-Way 200 Amp	6	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018226-D4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	6	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306018226-D	3	15/25 KV	200 Amp	-	6	14 GA.	-	30	60	18	GS206018W	GS186018F
AM306418223	3	15/25 KV	200 Amp	-	3	14 GA.	-	30	64	18	GS206418W	GS186418F
AM306418223-4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	3	14 GA.	-	30	64	18	GS206418W	GS186418F
AM306418223-W	3	15/25 KV	200 Amp	-	3	12 GA.	-	30	64	18	GS206418W	GS186418F
AM306424263	3	15/25 KV	200/600 Amp	-	3	14 GA.	-	30	64	24	GS206424W	GS186424F
AM426424263	3	15/25 KV	200/600 Amp	-	3	14 GA.	-	42	64	24	GS206424W	GS186424F
AM306622263	3	15/25 KV	200/600 Amp	-	3	14 GA.	-	30	66	22	GS206622W	GS186622F
AM306622263-4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	3	14 GA.	-	30	66	22	GS206622W	GS186622F
AM306622263-W	3	15/25 KV	200/600 Amp	-	3	12 GA.	-	30	66	22	GS206622W	GS186622F
AM306622263-W4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	3	12 GA.	-	30	66	22	GS206622W	GS186622F
AM306722264-MW	3	25 KV	600 Amp	-	4	12 GA.	-	30	67	22	GS206722W	GS186722F
AM306723263	3	15/25 KV	200/600 Amp	-	3	14 GA.	-	30	67	23	GS206723W	GS186723F
AM306723263-A	3	15/25 KV	200/600 Amp	-	3	-	yes	30	67	23	GS206723W	GS186723F
AM306723263-4	3	15 KV	200 Amp	(3) 4-Way 200 Amp	3	14 GA.	-	30	67	23	GS206723W	GS186723F
AM308624266-D	3	15/25 KV	200/600	-	6	14 GA.	-	30	86	24	GS208624W	GS188624F

Industry Standard IEEE 386 2 Thru 4-Way Small Interface Junctions - "Max Design" 15/25 KV 200/600 Amp, 15/25KV 200 Amp. Contact factory for compatibility on special mixed multi-Point "custom" molded type or Large Interface Junctions.

- *Note: 25 KV 200 ampere units will accept some 200 ampere 35KV rated junctions, contact factory for details.
- 25KV units will accommodate 15KV modules and 600 Ampere units will accommodate
- 200 ampere modules.

- -W equals 12Ga. steel - Western Underground approved.
- Contact factory for 2, 3 & 4-way 600 ampere modules.
- G-90 galvanized steel.
- Conforms to IEEE C57.27.28 Integrity.
- Contact the factory for KV35 information.

Pad Mount Primary Sectionalizing Pedestals - AMX Series


200 Through 600 Ampere | 15/25 KV | 2 Through 4-Way Junctions



AMX3018



AMX6018

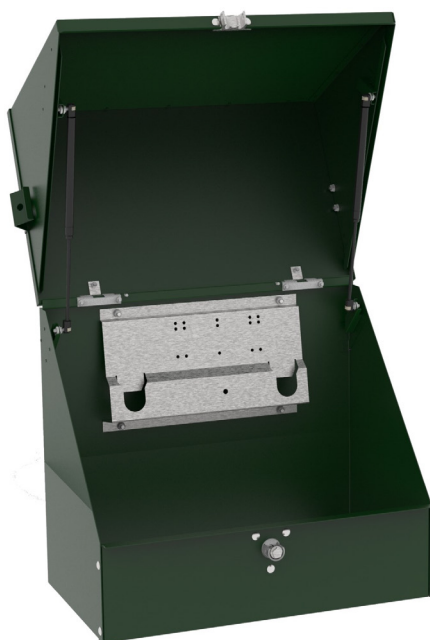


Catalog Number	Phase	Maximum KV Rating	Amperage Rating	#Parking Stands	Dimensions			Optional Ground Sleeves	
					H"	W"	D"	G90 Steel	Fiberglass
AMX2618	1	15/25 KV	200 Amp	2	30	26	18	GS202618W	GS182618F
AMX3018	1	15/25 KV	200 Amp	2	30	30	18	GS203018W	GS183018F
AMX6018	3	15/25 KV	200 Amp	6	30	60	18	GS206018W	GS186018F


- Provisions for 2 through 4-way, 200 ampere, 15/25 KV class junctions.
- Recessed locking mechanism with retained silicon bronze or stainless steel penta bolt and provisions for padlocking.
- 14 Ga. G-90 galvanized steel.
- 300 Series 18-8 stainless steel hardware.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.
- Conforms to IEEE C57.12.28 Security.
- Automotive grade nitrogen cover struts tested 15,000 cycles ambient plus 1,000 cycles at -30 and +180 degrees F.
- United States Patent No. 7,973,251 & 8,087,268.

Pad Mount Primary Fused Dead Front Sectionalizing Enclosures


AF Series | Single & Three Phase | 200, 600 Ampere | 15, 25 & 35 KV

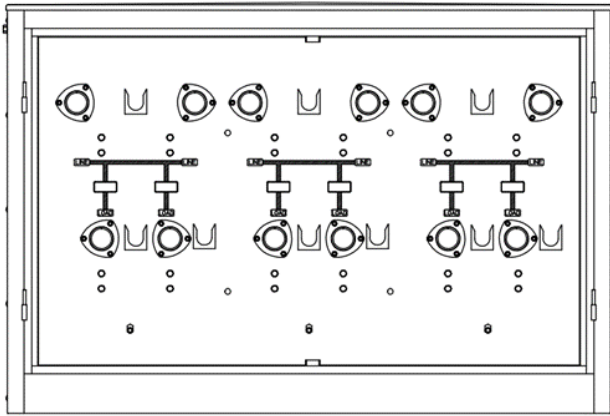


Dead Front View Without Doors

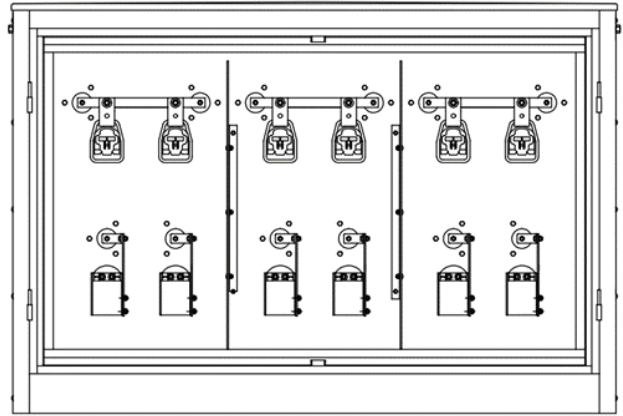


Live Front View Without Doors

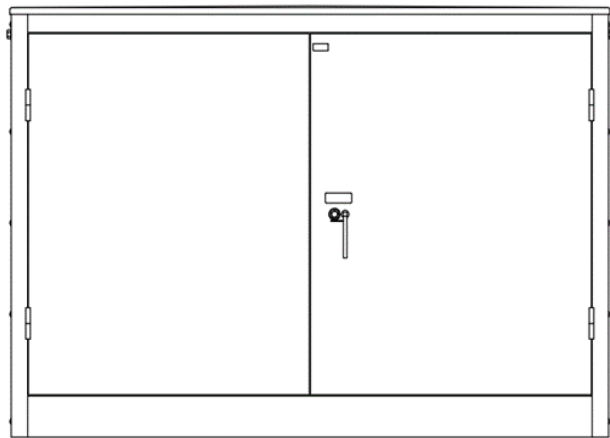

Front View

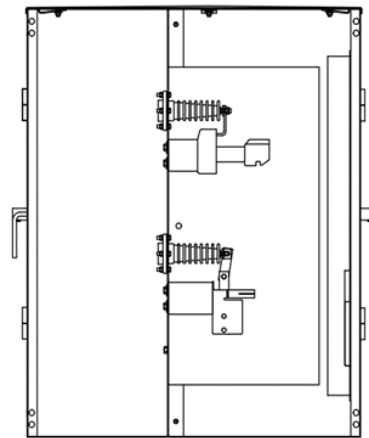

End Section View

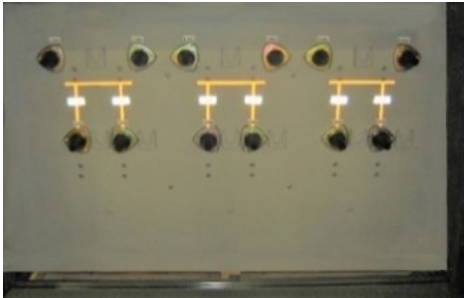

Dead Front View Without Doors



Live Front View Without Doors

Standard Features:

- 12 Ga. G-90 Galvanized Steel.
- Stainless Steel External Hardware.
- Munsell 7GY 3.29/1.5 "Pad-Mount Green" Ultra Weatherable Powder Polyester Paint.
- GPO-3 Safety Door Barriers.
- Offset Bushing Arrangement.
- Schematic Labeling.
- Fuse/Elbow Compartment Labels.
- Stainless Steel Ground Nuts
- IEEE C57.12.28 Security

Optional Features:

- Inserts Installed in 200 Amp Wells.
- Fuse End Fittings.
- ANTI-Condensation Coating.
- Clear Door Barriers.
- Fuse Compartment Floor.
- 304 or 316 Stainless Steel or Aluminum Enclosure.
- Stainless Steel Parking Stands.
- Customer Color Match Powder Coat Paint.
- ANSI Z535 Hazard Labels.

Pad Mount Primary Fused Dead Front Sectionalizing Enclosures

AF Series | Single & Three Phase | 200, 600 Ampere | 15, 25 & 35 KV

Catalog Nomenclature

AF 3 2 22 S2L 22-XXX

AF Series Fused Sectionalizing

1 = 1 Phase
2 = 2 Phase
3 = 3 Phase

1 = 15 KV
2 = 25 KV
3 = 35 KV

Line Configuration

02 = (1) 200 Amp Bushing Well
22 = (2) 200 Amp Bushing Well
06 = (1) 600 Amp Bushing
66 = (2) 600 Amp Bushing

Fuse Holders

AIS = ARC Strangler Code 1
A2S = ARC Strangler Code 2
N4X = NX Code 4
N5X = NX Code 5
N6X = NX Code 6
S2L = SML-20
S4L = SML-4Z
S2M = SM-20
S4M = SM-4Z
S5M = SM-5S

Load Configuration


02 = (1) 200 Amp Bushing Well
22 = (2) 200 Amp Bushing Well
06 = (1) 600 Amp Bushing
66 = (2) 600 Amp Bushing

Numerical Customer Specific Enclosure


15 & 25 KV - Fused Sectionalizing Enclosures - AF Series					
Enclosure	Phase	KV Rating	Dimensions		
			H"	W"	D"
AF1102	1	15 KV	54	30	44
AF1122	1	15 KV	54	30	44
AF1202	1	25 KV	58	30	44
AF1222	1	25 KV	58	30	44
AF3102	3	15 KV	54	79	44
AF3122	3	15 KV	54	79	44
AF3202	3	25 KV	58	79	44
AF3222	3	25 KV	58	79	44

Pad Mount Primary Equipment Enclosures - ATP Series


Penta Head Bolt Lockable Doors | 3-Point Latch | No Dead Front

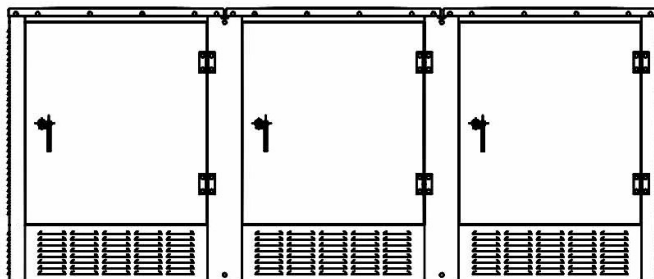


ATP4253-3-ASY

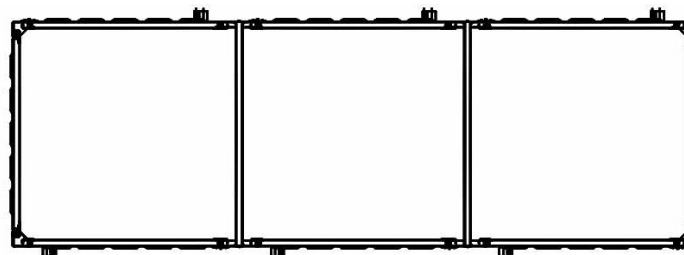

Top View Roof Removed




ATP4253-ASY



End View

ATP4253-3-ASY, ATP4253-ASY




Top View Roof Removed

ATP Series - With 2, 4 or 6 Side Hinged, Penta Head Bolt Pad Lockable Doors With 3-Point Latch - No Deadfront					
Enclosure	Phase	Assembled	Dimensions		
			H"	W"	D"
ATP4245	1	-	45	42	42
ATP4245-3	3	-	45	42	128
ATP4253	1	-	53-1/2	42	42
ATP4253-ASY	1	Yes	53-1/2	42	85
ATP4253-2	2	-	53-1/2	42	85
ATP4253-3	3	-	53-1/2	42	128
ATP4253-3-ASY	3	Yes	53-1/2	42	128
ATP4263	1	-	63	42	42
ATP4263-2	2	-	63	42	85
ATP4263-3	3	-	63	42	128
ATP5463	1	-	63	54	54
ATP5463-2	2	-	63	54	109
ATP5463-3	3	-	63	54	164
ATP5463-4	4	-	63	54	219
ATP5471	1	-	71	54	54
ATP5471-2	2	-	71	54	109
ATP5471-3	3	-	71	54	164
ATP5471-3-ASY	3	Yes	71	54	164
ATP5471-4	4	-	71	54	219
ATP5481-3	3	-	81	54	164
ATP5481-4	4	-	81	54	219
ATP5491-3	3	-	91	54	164
ATP5491-4	4	-	91	54	219


- Conforms to IEEE C57.27.28 integrity.
- Units are REA approved.
- Generally not suitable for Live Front Distribution - See ATPB Series
- Units shipped disassembled except units noted -ASY.
- Material: 12 Ga. G-90 galvanized steel.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Pad Mount Primary Equipment Enclosures - ATBP Series


Penta Head Bolt Lockable Doors | Hardboard Insulating Barriers | No Dead Front

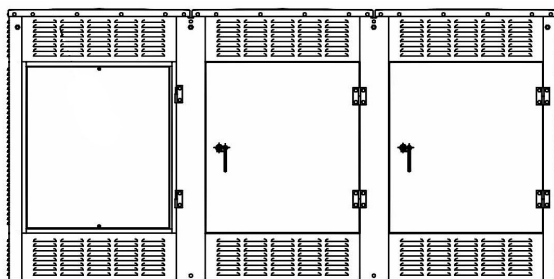

ATBP4263-3-ASY



End View

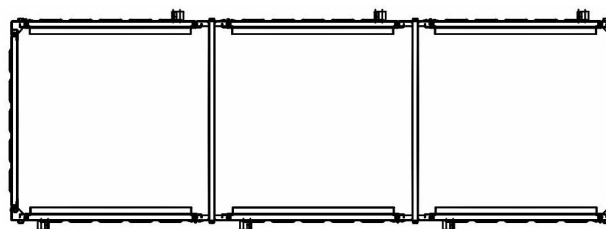


Top View Roof Removed

ATBP Series - With 2, 4 or 6 Side Hinged, Penta Head Lockable Doors With 3-Point Latch - Hardboard Insulating Barriers - No Deadfront					
Catalog Number	# Positions	Factory Assembled	Dimensions		
			H"	W"	D"
ATBP4245	1	-	45	42	42
ATBP4245-2	2	-	45	42	85
ATBP4253	1	-	53-1/2	42	42
ATBP4253-ASY	1	Yes	53-1/2	42	42
ATBP4253-2	2	-	53-1/2	42	85
ATBP4253-3	3	-	53-1/2	42	128
ATBP4263	1	-	63	42	42
ATBP4263-3	3	-	63	42	128
ATBP4263-3-ASY	3	Yes	63	42	128
ATBP5463	1	-	63	54	54
ATBP5463-2	2	-	63	54	109
ATBP5463-3	3	-	63	54	164
ATBP5463-3-ASY	3	Yes	63	54	164
ATBP5463-4	4	-	63	54	219
ATBP5471	1	-	71	54	54
ATBP5471-ASY	1	Yes	71	54	54
ATBP5471-2	2	-	71	54	109
ATBP5471-3	3	-	71	54	164
ATBP5471-3-ASY	3	Yes	71	54	164
ATBP5471-4	4	-	71	54	219
ATBP5471-4-ASY	4	Yes	71	54	219
ATBP5481	1	-	81	54	54
ATBP5481-ASY	1	Yes	81	54	54
ATBP5481-2	2	-	81	54	109
ATBP5481-3	3	-	81	54	164
ATBP5481-3-ASY	3	Yes	81	54	164
ATBP5481-4	4	-	81	54	219
ATBP5491-3	3	-	91	54	164
ATBP5491-4	4	-	91	54	219
ATBP5491-4-ASY	4	Yes	91	54	219
ATBP5491-5	5	-	91	54	274

- Conforms to IEEE C57.27.28 Integrity.
- Units are REA approved.
- Units shipped disassembled except units noted –ASY.
- Material: 12 Ga. G-90 galvanized steel.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Pad Mount Primary Equipment Enclosures - ATBPR Series

Radial Feed Load Break Dead Front Door | Penta Head Bolt Lockable Doors

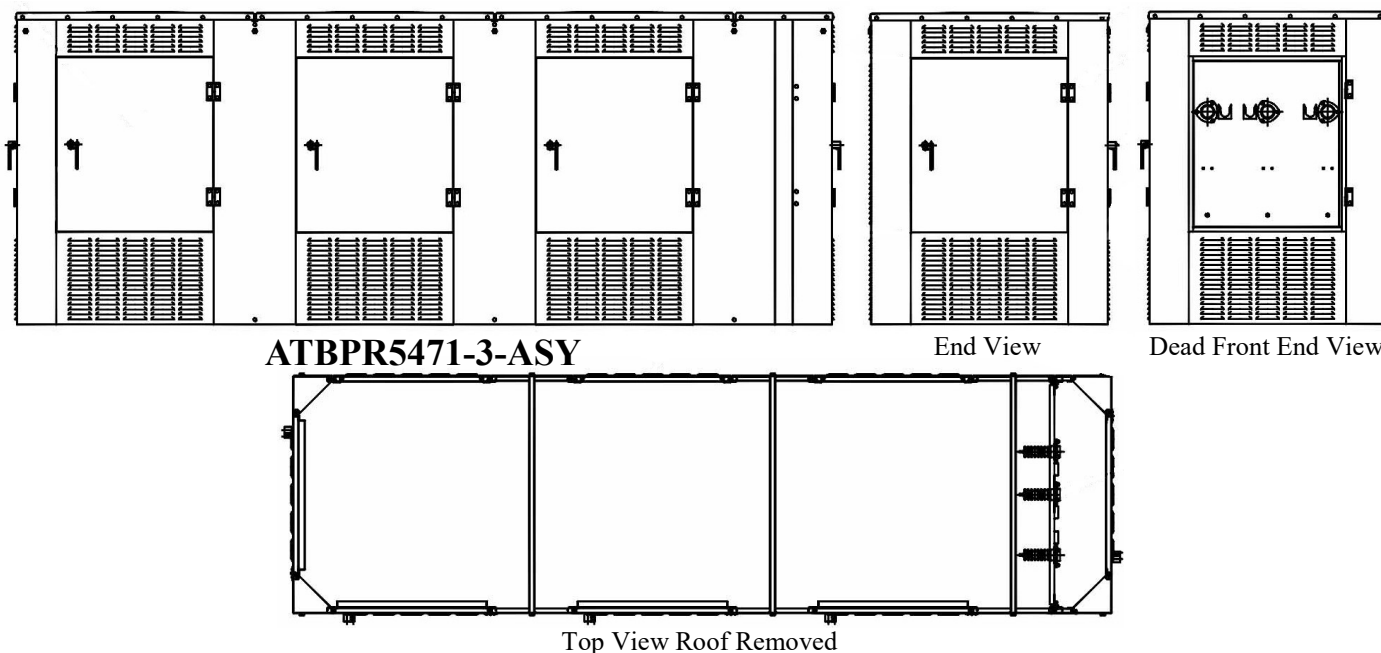


ATBPR Series - With 2, 4 or 6 Side Hinged, Penta Head Bolt Lockable Doors With 3-Point Latch - Tempered Hardboard Insulating Barriers At Each Door Except At The Radial Feed Loadbreak Deadfront Door							
Catalog Number	# Positions	Factory Assembled	Dimensions			In-Air Bushing Well	# Parking Stands
			H"	D"	Total Width		
ATBPR4245	1	-	45	42	59	(1) 15 KV	3
ATBPR4245-2	2	-	45	42	102	(2) 15 KV	3
ATBPR4253	1	-	54	42	59	(1) 15 KV	3
ATBPR4253-2	2	-	54	42	102	(2) 15 KV	3
ATBPR4253-3	3	-	54	42	145	(3) 15 KV	3
ATBPR4253-4	4	-	54	42	187	(4) 15 KV	4
ATBPR4263-3	3	-	63	42	145	(3) 15 KV	3
ATBPR5463	1	-	63	54	77	(1) 15 KV	3
ATBPR5463-3	3	-	63	54	187	(3) 15 KV	3
ATBPR5463-4	4	-	63	54	187	(3) 15 KV	3
ATBPR5471	1	-	71	54	77	(1) 15 KV	3
ATBPR5471-3	3	-	71	54	187	(3) 15 KV	3
ATBPR5471-3-ASY	3	yes	71	54	187	(3) 15 KV	3
ATBPR5471-4	4	-	71	54	242	(3) 15 KV	3
ATBPR5481	1	-	81	54	77	(1) 15 KV	3
ATBPR5481-3	3	-	81	54	187	(3) 15 KV	3
ATBPR5481-3-ASY	3	yes	81	54	187	(3) 15 KV	3
ATBPR5491	1	-	91	54	77	(1) 15 KV	3


- Loop feed models available upon request.
- Conforms to IEEE C57.27.28 Integrity.
- Units are REA approved.
- Units not suitable for high voltage applications.
- Units shipped disassembled except units noted –ASY.
- Material: 12 Ga. G-90 galvanized steel.
- Powder TGIC Polyester Paint Finish, Munsell 7GY 3.29/1.5 Green.

Pad Mount Primary Metering Enclosures - APMP Series


Dead Front | Three Phase | 200 & 600 Ampere | 15/25 KV

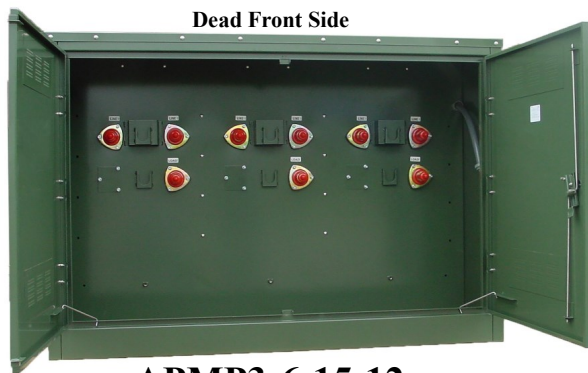


APMP3-6-15-12

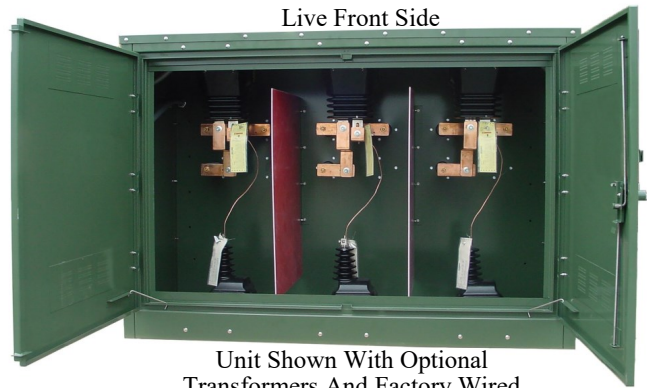


Unit Shown With Optional Transformers And Factory Wired

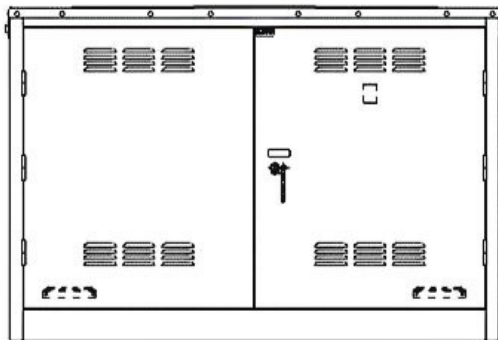

Front & Back View

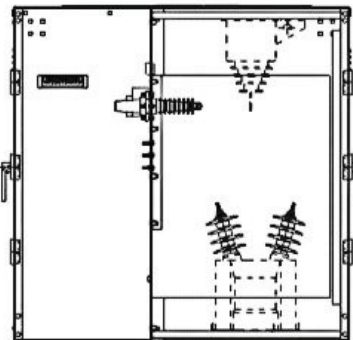

Side Section View

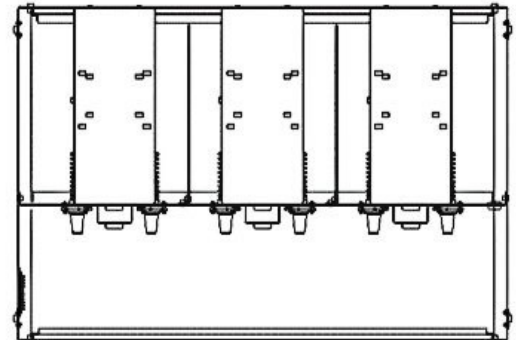

View W/Top Removed

Three Phase										
Catalog Number	Phase	Amperage Rating	Nominal voltage	BIL Rating	Bushing Well Configuration		Dimensions			Optional Vaults
					Lins	Loads	H"	W"	D"	Fiberglass
APMP3-2-15-11	3	200	15 KV	95 KV	1	1	54	79	54	1012124
APMP3-2-15-12	3	200	15 KV	95 KV	1	2	54	79	54	1012124
APMP3-2-15-21	3	200	15 KV	95 KV	2	1	54	79	54	1012124
APMP3-2-15-22	3	200	15 KV	95 KV	2	2	54	79	54	1012124
APMP3-2-25-11	3	200	25 KV	125 KV	2	2	54	79	54	1012124
APMP3-2-25-12	3	200	25 KV	125 KV	1	2	54	79	54	1012124
APMP3-2-25-21	3	200	25 KV	125 KV	2	1	54	79	54	1012124
APMP3-2-25-22	3	200	25 KV	125 KV	2	2	54	79	54	1012124
APMP3-6-15-11	3	600	15 KV	95 KV	1	1	54	79	54	1012124
APMP3-6-15-12	3	600	15 KV	95 KV	1	2	54	79	54	1012124
APMP3-6-15-21	3	600	15 KV	95 KV	2	1	54	79	54	1012124
APMP3-6-15-22	3	600	15 KV	95 KV	2	2	54	79	54	1012124
APMP3-6-25-11	3	600	25 KV	125 KV	1	1	54	79	54	1012124
APMP3-6-25-12	3	600	25 KV	125 KV	1	2	54	79	54	1012124
APMP3-6-25-21	3	600	25 KV	125 KV	2	1	54	79	54	1012124
APMP3-6-25-22	3	600	25 KV	125 KV	2	2	54	79	54	1012124


- IEEE C57.12.28.
- Note: 15 & 25 KV 600 ampere units will not accept a 200 ampere piggy back tap. Request a 22" deep dead front side for 200 ampere piggy back tap.
- Material: 12 Ga. G-90 galvanized steel.
- Munsell 7GY 3.29/1.5 "Pad-Mount Green" Ultra Weatherable Powder Polyester Paint.
- Supplied with 10-pole terminal strip.
- Provision for (3) 15 KV or 25 KV ABB, Artech, GE, or Ritz Current Transformers per IEEE C12.11.
- Provision for (3) 15 KV or 25 KV ABB, Artech, GE, or Ritz Voltage Transformers per IEEE C12.11.

Refer to page 97 for Ordering Guide.


Pad Mount Primary Metering Enclosures - APMP Series

Dead Front | Single Phase | 200 & 600 Ampere | 15/25 KV


APMP1-2-15-11

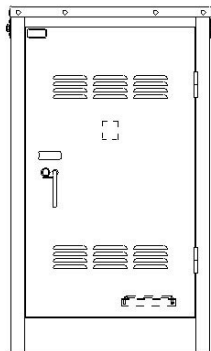


Front & Back View

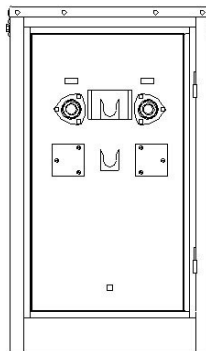


Dead Front View

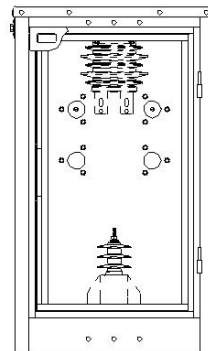

Live Front View

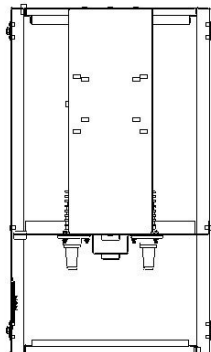

Top View W/Roof Removed

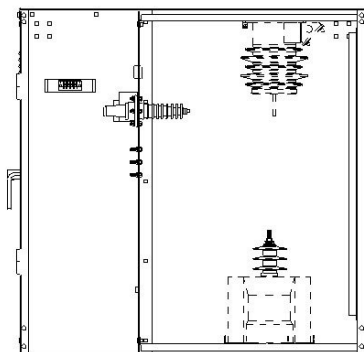

End Section View


Single Phase										
Catalog Number	Phase	Amperage Rating	Nominal voltage	BIL Rating	Bushing Well Configuration		Dimensions			Optional Vaults
					Lins	Loads	H"	W"	D"	Fiberglass
APMP1-2-15-11	1	200	15 KV	95 KV	1	1	54	31	54	1010429
APMP1-2-15-12	1	200	15 KV	95 KV	1	2	54	31	54	1010429
APMP1-2-15-21	1	200	15 KV	95 KV	2	1	54	31	54	1010429
APMP1-2-15-22	1	200	15 KV	95 KV	2	2	54	31	54	1010429
APMP1-2-25-11	1	200	25 KV	125 KV	2	2	54	31	54	1010429
APMP1-2-25-12	1	200	25 KV	125 KV	1	2	54	31	54	1010429
APMP1-2-25-21	1	200	25 KV	125 KV	2	1	54	31	54	1010429
APMP1-2-25-22	1	200	25 KV	125 KV	2	2	54	31	54	1010429
APMP1-6-15-11	1	600	15 KV	95 KV	1	1	54	31	54	1010429
APMP1-6-15-12	1	600	15 KV	95 KV	1	2	54	31	54	1010429
APMP1-6-15-21	1	600	15 KV	95 KV	2	1	54	31	54	1010429
APMP1-6-15-22	1	600	15 KV	95 KV	2	2	54	31	54	1010429
APMP1-6-25-11	1	600	25 KV	125 KV	1	1	54	31	54	1010429
APMP1-6-25-12	1	600	25 KV	125 KV	1	2	54	31	54	1010429
APMP1-6-25-21	1	600	25 KV	125 KV	2	1	54	31	54	1010429
APMP1-6-25-22	1	600	25 KV	125 KV	2	2	54	31	54	1010429

- IEEE C57.12.28.
- Note: 15 & 25 KV 600 ampere units will not accept a 200 ampere piggy back tap. Request a 22" deep dead front side for 200 ampere piggy back tap.
- Material: 12 Ga. G-90 galvanized steel.
- Munsell 7GY 3.29/1.5 "Pad-Mount Green" Ultra Weatherable Powder Polyester Paint.
- Supplied with 10-pole terminal strip.
- Provision for (3) 15 KV or 25 KV ABB, Arteche, GE, or Ritz Current Transformers per IEEE C12.11.
- Provision for (3) 15 KV or 25 KV ABB, Arteche, GE, or Ritz Voltage Transformers per IEEE C12.11.

Refer to page 97 for Ordering Guide.

Pad Mount Primary Metering Enclosures - APX Series

Dead Front | Three Phase | 200 & 600 Ampere | 15/25 KV

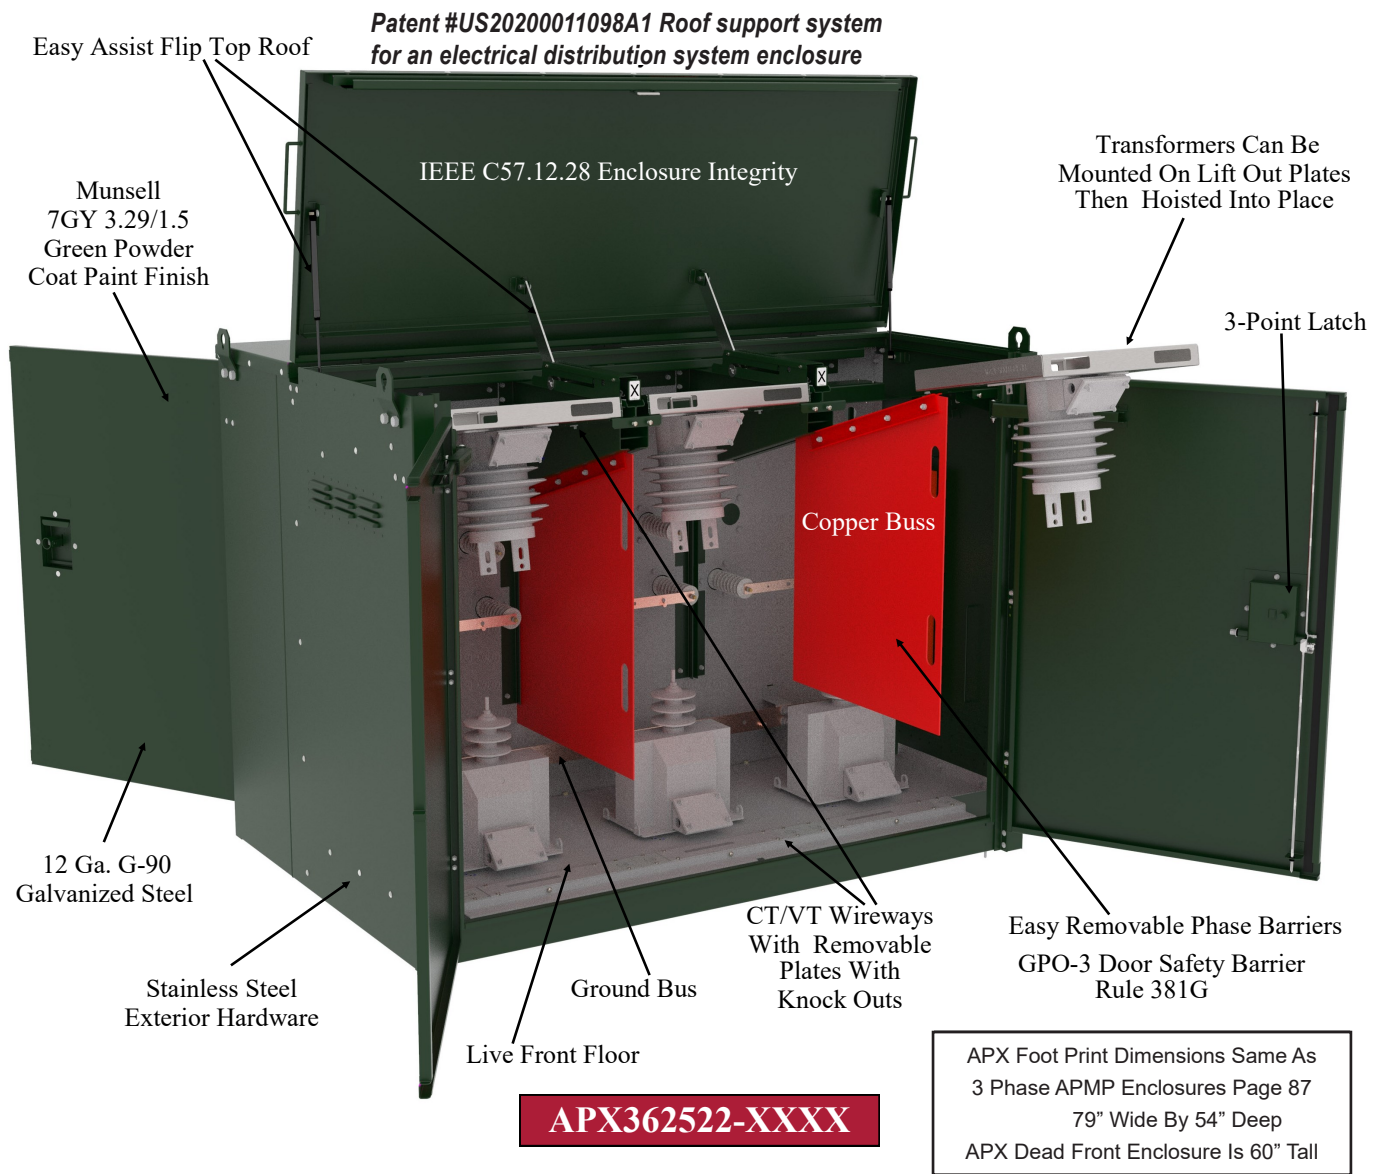

Standard Features:

- Easy Assist Flip Top Live Front Roof.
- **Patent #US20200011098A1 Roof support system for an electrical distribution system enclosure**
- Lift Out Current Transformer Plates with Hoisting Provisions.
- CT/VT Wireways with Removable Plates with KO's.
- 12 Ga. G-90 Galvanized Steel.
- Ground Bus.
- NEMA 260 Warning/Danger Labels.
- Aluminum Nameplates.
- GPO-3 Safety Door Barriers.
- 22" Dead Front Side.
- Munsell 7GY 3.29/1.5 "Pad-Mount Green" Ultra Weatherable Powder Polyester Paint.
- Stainless Steel External Hardware.
- Removable Stainless Steel Lifting Plates.
- Offset Bushing Arrangement.
- Easy Slide off Removable Phase Barriers.


Optional Features:

- Fiberglass Ground Sleeve Vault - Catalog #1012124.
- 304 or 316 Stainless Steel.
- Meter Socket and Test Switch Installed.
- Factory Installed Transformers.
- Secondary Wiring Installed.
- ANSI Z535 Hazard Labels (Replaces MR. OUCH).
- ANTI-Condensation Coating.
- Inserts Installed in 200 Amp Wells.
- Clear Door Barriers.
- Customer Color Match Powder Coat.
- Special Wiring Color Codes.
- Copper Adjustable Bus for Transformers
- Removable Stainless Steel Lifting Plates

Refer to page 97 for Ordering Guide.

Pad Mount Primary Metering Enclosures - APX Series

Dead Front Side | Three Phase | 200 & 600 Ampere | 15/25 KV

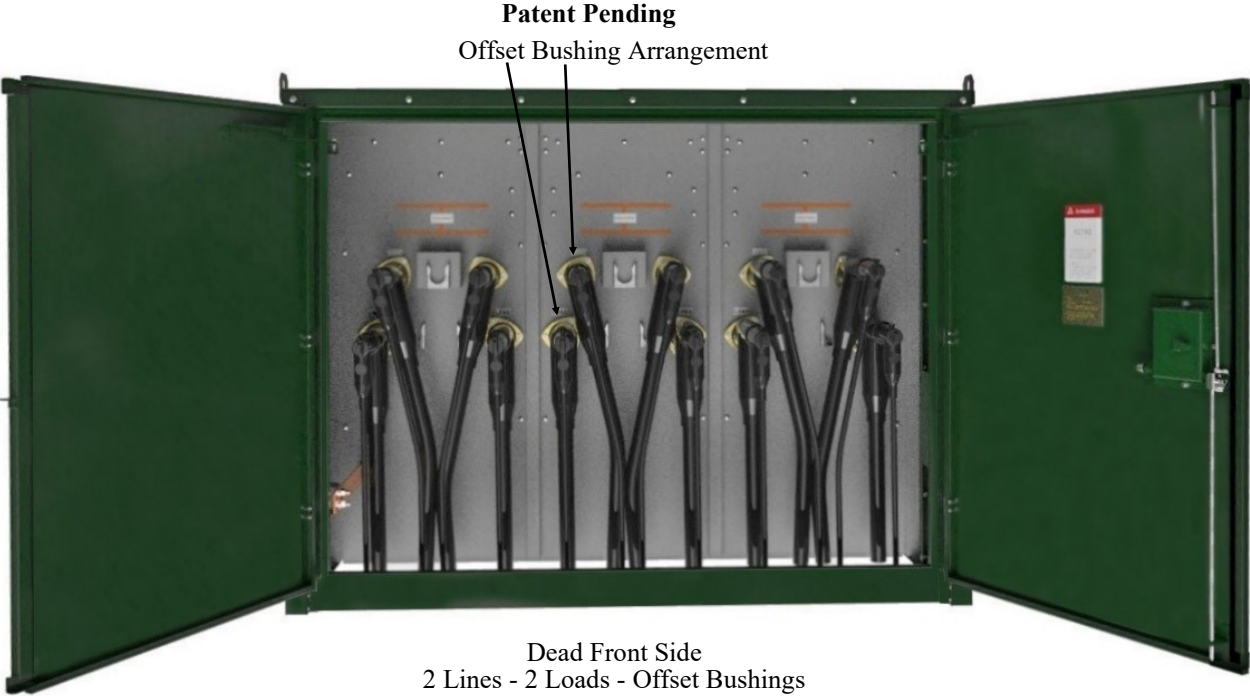

APX foot print dimensions same as 3 phase APMP enclosures, 79” Wide, 54” Deep. APX dead front enclosure is 60” tall.

Catalog Nomenclature

APX 3 6 25 22-XXXX

**APX Series
Primary Metering**

**1 = 1 Phase
3 = 3 Phase**

**2 = 200 Amp
6 = 600 Amp**

**15 = 15 KV
25 = 25 KV**


**11 = 1-Line, 1-Load
12 = 1-Line, 2-Load
21 = 2-line, 1-Load
22 = 2-Line, 2-Load**

Numerical Customer Specific Enclosure

Refer to page 97 for Ordering Guide.

Pad Mount Primary Metering Enclosures - APX Series

Live Front | Three Phase | 15 KV

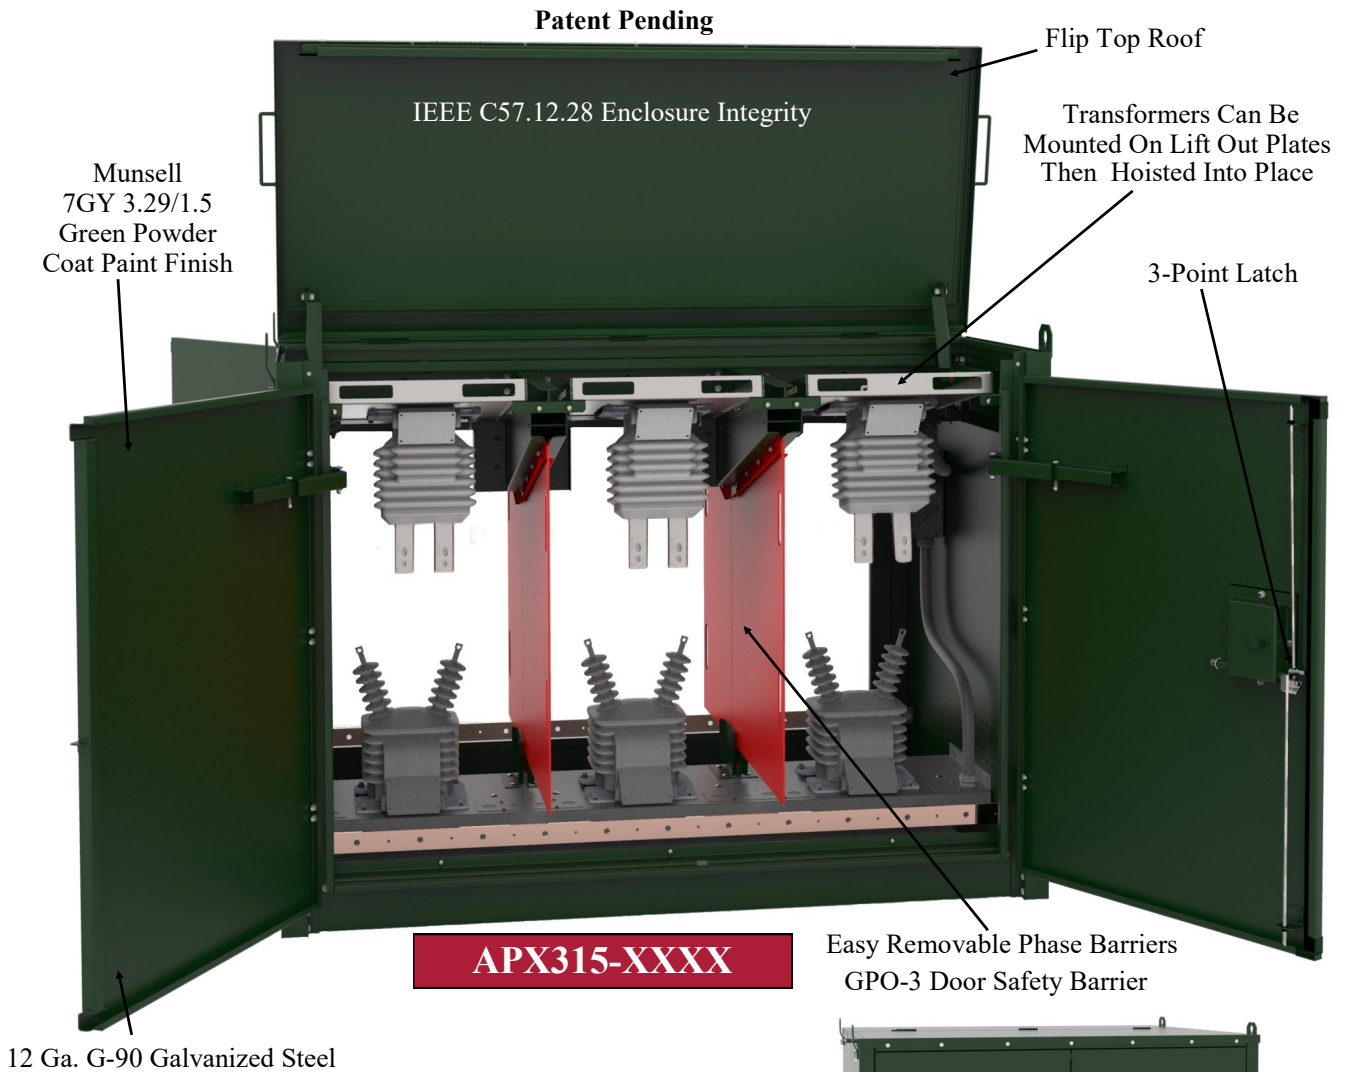

Standard Features:

- Flip Top Live Front Roof.
- Lift Out Current Transformer Plates with Hoisting Provisions.
- CT/VT Wireways with Removable Plates with Knock Outs.
- 12 Ga. G-90 Galvanized Steel.
- Ground Bus.
- NEMA 260 Warning/Danger Labels.
- Aluminum Nameplates.
- GPO-3 Safety Door Barriers.
- Munsell 7GY 3.29/1.5 "Pad-Mount Green" Ultra Weatherable Powder Polyester Paint.
- Stainless Steel External Hardware.
- Removable Stainless Steel Lifting Plates.
- Easy Slide off Removable Phase Barriers.
- High Voltage Warning Label on Exterior Center of Right
- Hand Door and Danger Label on Interior Center of Right
- Hand Door and Barrier.
- Transformer Compartment Label on Each Right Side Door.



Front View

Optional Features:

- 304 or 316 Stainless Steel.
- Meter Socket/Test Switch Installed.
- Factory Installed Transformers.
- Secondary Wiring Installed.
- ANSI Z535 Hazard Labels (Replaces MR. OUCH).
- Anti-Condensation Coating.
- Clear Door Barriers.
- Customer Color Match Powder Paint Coat.
- Special Wiring Color Codes.
- Copper Adjustable Bus for Transformers.
- Removable Stainless Steel Lifting Plates.

Refer to page 97 for Ordering Guide.

Pad Mount Primary Metering Order Guide

Customer /AgentName: City: State:

Phone Number: Email:

Model

☐ Standard APMP Model ☐ APX Model

Single or Three Phase

☐ 1 Phase
☐ 3 Phase

Nominal System Voltage

☐ 15 KV-95 KV BIL ☐ For 200A, 35kV Bushing Wells per IEEE Std. 386:
(200A Bushing Well Interface, 8.3kV, 15.2kV, and 21.1kV)
☐ 25 KV-125 KV BIL ☐
☐ 35 KV-150 KV BIL ☐ (200A Loadbreak Interface No.1A, 21.1kV/36.6 kV)-Large 35kV Interface

Line Bushings Per Phase

☐ (1) 200 Amp Line Bushing Well ☐ Include Inserts
☐ (2) 200 Amp Line Bushing Wells ☐ Include Inserts
☐ (1) 600 Amp Line Integral Bushings
☐ (2) 600 Amp Line Integral Bushings

Load Bushings Per Phase

☐ (1) 200 Amp Load Bushing Well ☐ Include Inserts
☐ (2) 200 Amp Load Bushing Wells ☐ Include Inserts
☐ (1) 600 Amp Load Integral Bushings
☐ (2) 600 Amp Load Integral Bushings

Specify Brand Of Transformers

☐ No Brand Preference ☐ GE
☐ ABB ☐ Arteche ☐ Ritz

Current Transformer Ratio

☐ None (Mounting Provisions Only) ☐ 40:5 CT
☐ 5:5 CT ☐ 75:5 CT
☐ 10:5 CT ☐ 100:5 CT
☐ 20:5 CT ☐ 150:5 CT
☐ 25:5 CT ☐ 200:5 CT
☐ 30:5 CT ☐ Other Ratio

Accuracy Class

☐ .3 Standard Range
☐ .15 High Accuracy

Voltage Transformers

☐ None (Mounting Provisions Only) ☐ 70:1 VT
☐ 20:1VT ☐ 100:1 VT
☐ 35:1 VT ☐ 110:1 VT
☐ 40:1 VT ☐ 120:1VT
☐ 60:1 VT ☐ Other Ratio
☐ 63.5:1 VT ☐ VT Secondary Fusing

Meter Socket Options

☐ None
☐ Terminal Block
☐ 5 Jaw Socket W/Test Switch Without Wiring
☐ 5 Jaw Socket W/Test Switch Pre-Wired Form 3S
☐ 5 Jaw Lever Bypass Without Wiring
☐ 5 Jaw Lever Bypass Pre-Wired Form 3S
☐ 13 Jaw W/Test Switch Without Wiring
☐ 13 Jaw Socket W/Test Switch Pre-Wired Form 9S
☐ 13 Jaw Lever Bypass Without Wiring
☐ Other-Specify

Options Available

☐ G-90 Galvanized Steel (Standard)
☐ Stainless Steel Enclosure (Meter Socket Not UL)
☐ Aluminum Enclosure
☐ Munsell Green 7GY3.29/1.5 Pad Mount Green (Standard)
☐ Stainless Steel Enclosure (Meter Socket Not Included)
☐ Special Color (Meter Socket Not Included)
Specify (See Note 1)
☐ Clear Door Safety Barriers Live Front Compartment
☐ Stainless Steel Unpainted Parking Stands (APX Standard)
☐ Anodized Aluminum Nameplate (APX Standard)
☐ Anti-Condensation Coating On Inside Of Roof
☐ Schematic Diagram On Bushing Panel
☐ Nema 260 Mr Ouch Labels (Not used with Z535 Below)
☐ ANSI Z535 Labels (Not Used with Mr Ouch Above)
☐ Ground Bus (APX Standard)
☐ Livefront Floor

Danger Labels on Interior

☐ "Mr. Ouch" or ☐ "ANSI Z535"

Warning Labels on Exterior

☐ "Mr. Ouch" or ☐ "ANSI Z535"

☐ Ground Lugs

Additional Parts


Notes:

1. Special coating colors require an actual paint chip/sample be provided at the time of order or provide an industry recognized color system number such as Munsell Federal 585B or NCS and the gloss is not below 25 when derived in accordance with ASTM D623 (Meter Socket is not included with special color).
2. Standard 9S has 3 CT's and 3 VT's.
3. Standard 3S has 1 CT and 1 VT.
4. Specifying Manufacturer of Instrument Transformers may extend lead times.

Please fill out form and email form to salesdept@durhamusa.com



722 Durham Road | Lebanon, MO 65536 | 417.532.7121 | www.DurhamUSA.com

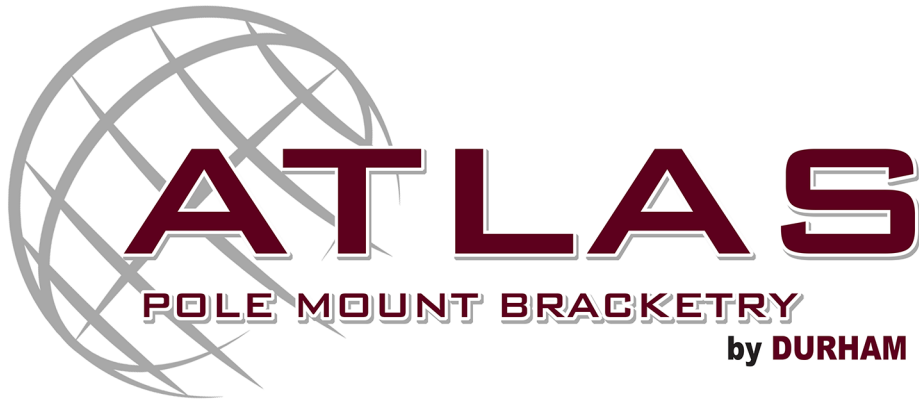

**Pole Top Primary & Secondary Metering Mounts
Conduit Mounts & Straps
Equipment Mounts
T-Slot**

Suitable For Mounting Most ANSI C12.12 Standard
Outdoor 15 KV Through 25 KV & Some 35 KV NSV Medium Voltage Transformers

Reliable and Versatile Solutions

Custom configurations available to meet your specific requirements.
Engineered for efficiency and built to last—these units offer the perfect
combination of strength, flexibility, and convenience.

Discover how our solutions can elevate your next project!

Pole Top Primary Metering Mounts

Single Phase

Designed for 1 or 2 Pieces of Equipment


- **Sturdy & Reliable:** Features a Thru-Bolt Mounting design compatible with (2) 5/8" thru-bolts (bolts not included).
- **Convenient Installation:** Large pre-drilled mounting surfaces ensure quick and hassle-free setup.
- **Ready to Go:** Fully assembled, preinstalled, and pre-wired options available for ultimate convenience.
- **Effortless Adjustments:** Equipped with multiple stainless steel permanent lift-points for fast and secure positioning.
- **Durable Design:** Welded Aluminum construction, light weight, and durable or sturdy Stainless Steel options available.

One Position—2 Pieces of Equipment

- **Ready for Installation:** Pre-installed and pre-wired options save you time and effort.
- **Built to Last:** All hardware is crafted from durable stainless steel for long-lasting performance.
- **Seamless Integration:** Features a sturdy stainless steel pole interface for superior stability.

Versatile Applications:

Perfect for pole-mounting large metering cabinets and other enclosures, these units deliver both functionality and reliability.

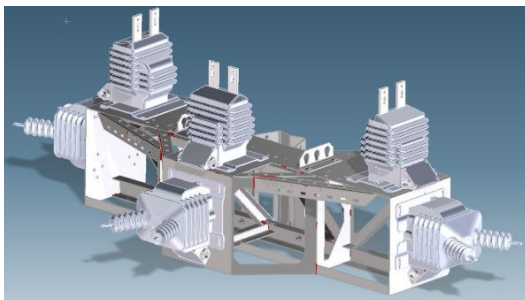

TM1-14A



BACK

Versatile Two & Three Position Units

Designed for 4 or 6 Pieces of Equipment

TM3-42SP



TM3-63SP



TM1



Catalog Number	Transformer Position
TM1	2
TM1-14A	2
TM2-42SP	2-4
TM3-42SP	2-6
TM3-46C	3
TM3-46SP	2-6
TM3-63SP	2-6
TM3-66SP	2-6

- Maximum Instrument Transformer load of 400 Lbs. per section and 1,200 Lbs. total Transformer load.
- Contact representative or factory for complete test report.

Pole Top Secondary Metering Mounts


Secondary

Designed for 1 or 2 Pieces of Equipment

- **Opposing Keyhole Mounting:** Simplifies installation while ensuring a secure and sturdy fit.
- **Versatile Pre-Drilled Holes:** Accommodates both two-hole and four-hole mounting configurations for ultimate flexibility. Perfect for use with various pole-mounting large metering cabinets and other enclosures, offering superior convenience and reliability.
- **Ready for Installation:** Pre-installed and pre-wired options save you time and effort.
- **Durable Design:** Welded Aluminum construction, light weight, and durable or sturdy Stainless Steel options available.
- **Seamless Integration:** Features a sturdy stainless steel pole interface for superior stability.



**Angle
ALT-16A**

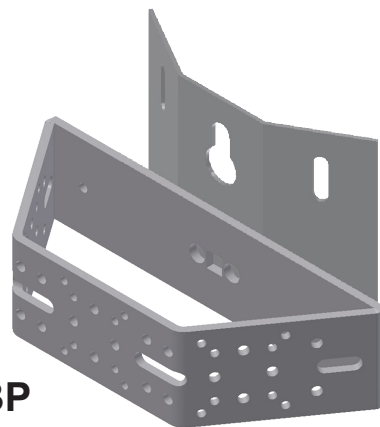

**Angle
ALT-16A-BP**

Catalog Number	Transformer Position	Material
ALC-10	1	Stainless Steel
ALC-10A	1	Aluminum
ALC-20	2	Stainless Steel
ALC-20A	2	Aluminum
ALC-27	3	Stainless Steel
ALC-27A	3	Aluminum
ALC-33A	4	Aluminum
ALD-12A	1	Aluminum
ALD-14	2	Stainless Steel
ALD-14A	2	Aluminum
ALD-21	3	Stainless Steel
ALD-21A	3	Aluminum
ALD-21ANH	3	Aluminum
ALD-21A-AEP	3	Aluminum
ALD-21A-AEP-SWS	3	Aluminum
ALD-28A	4	Aluminum
ALD-28A-AEP	4	Aluminum
ALD-28A-SWS	4	Stainless Steel
ALD-28A-AEP-SWS	4	Aluminum
ALT-16	3	Stainless Steel
ALT-16A	3	Aluminum
ALT-16A-BP	3	Aluminum


3" Top-Hat Design - Provides a sleek 3-inch standoff from the mounting surface for better accessibility and enhanced functionality.



**Top Hat
ALD-21A**

Channel Design—One thru Five Position

- Manufactured of 1/8" thick Aluminum.

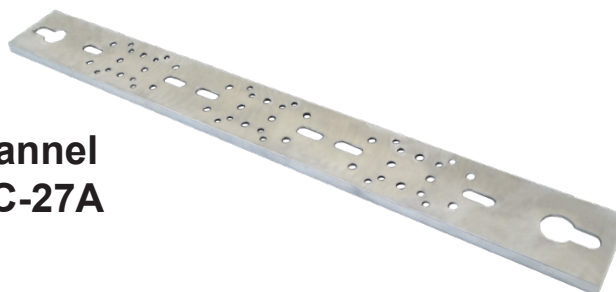

**Channel
ALC-27A**

Secure Conduit Support for Pole-Mounted Applications

Our conduit mounts provide a durable and versatile solution for supporting conduit on wood, steel, or concrete poles. Constructed from high-strength aluminum, these mounts offer reliable performance while resisting corrosion in harsh outdoor environments.

- Bolt-on or strap-mount installation options.
- Available standoff distances from 4½” to 9”
- Lightweight, durable, and Corrosion-resistant for extended service life.


Catalog Number	Standoff
ACM-S	6 IN
ACM-6	6 IN
ACM-9	9 IN
ACM-A	4 1/2 IN to 6 IN

- Fits standard conduit sizes of 2, 2 1/2, 3, 3 1/2, 4, 5, and 6 IN.
- 1/2 IN mounting bolts included.

ACM-6



ACM-S

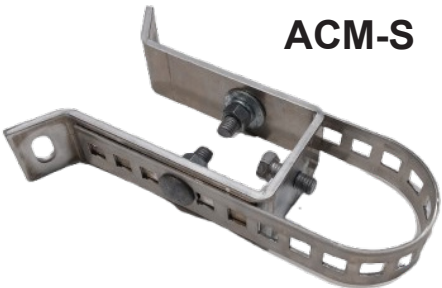


ACM-9




ACM-A



ACS-3



ACS-4



Catalog Number	Conduit Size
ACS-2	2 IN
ACS-25	2 1/2 IN
ACS-3	3 IN
ACS-35	3 1/2 IN
ACS-4	4 IN
ACS-5	5 IN
ACS-6	6 IN

Equipment Mounts & T-Slot Mounting Channels

ATLAS EQUIPMENT MOUNTS





ACAM-SH-12 & ACAM-SH-18: Aluminum single position cutout, arrester, and termination mount. 12 in or 18 in standoff from pole.



APIM11-7: Galvanized Steel, post insulator mount. 9 in standoff from pole.

Versatile T-Slot Channels for Metering Applications

A4T
Four Way

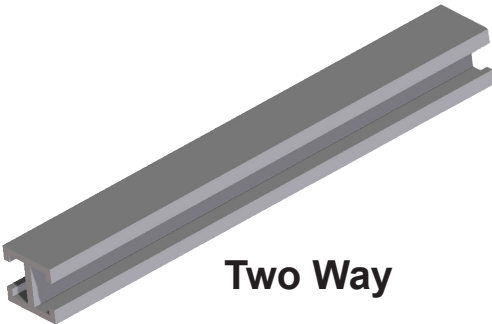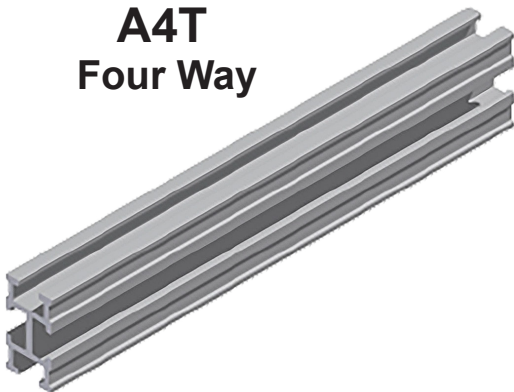

Two Way

- Two-way and four-way configurations
- Standard lengths: 12", 18", 24", 30", and 36"
- Captures 1/2" bolt heads
- Custom lengths available

Catalog Number	Length	Type
ATS-12-4W	12 IN	Four Way
ATS-18-4W	18 IN	Four Way
ATS-24-4W	24 IN	Four Way
ATS-30-4W	30 IN	Four Way
ATS-36-4W	36 IN	Four Way
ATS-12	12 IN	Two Way
ATS-18	18 IN	Two Way
ATS-24	24 IN	Two Way
ATS-30	30 IN	Two Way
ATS-36	36 IN	Two Way

Meter Socket Option Prefix Code Letters

A - Aluminum cabinet.

B - For an exposed Inner-Tite or Brooks standard length barrel lock with a permanently welded bracket.

F - For a Brooks or Inner-Tite standard length barrel lock in conjunction with Brooks lock guard #865 or #86505 and with a permanently welded bracket.

G - Grounded fifth terminal (9 o'clock position).

H - Horn Bypass.

I - Inhibitor in wire connector.

J - Insulated fifth terminal (9 o'clock position).

M - Temporary meter opening cover (waxed cardboard).

N - No sealing ring (eliminates standard snap type on ring style units).

P - 45 degree shut-off jaw. Allows meter to be rotated 45 degrees and plugged back into cabinet so socket can be fronted and resealed to shut off power (located at 3 O'clock position).

R - Ring style socket.

S - Screw type sealing ring supplied on ring style sockets instead of snap type.

T - One (1) grounding connector (#14-#2 CU-AL).

TT - Two (2) grounding connectors (#14-#2 CU-AL).

U - UL (Underwriters Laboratories) label.

Z - 5/16" hex head connector screw in place of slotted connector (125 ampere only).

Meter Socket Accessories



ARP01138
Snap Type
Sealing Ring Aluminum



ARP00026
Snap Type Sealing Ring
Stainless Steel



ARP00027
Screw Type Sealing Ring
Stainless Steel



ARP00035
Plug-In Fifth Terminal
For 125 & 200 Amp
Residential




ARP01662 (3) Per Kit
Load/Neutral Tap
Connectors
For 200 Amp Residential




ARP01044
KO Cover Plates 1/2"




ARP00821
KO Cover Plates 3/4"-1"



ARP00819
KO Cover Plates
1-1/4"-1-1/2"




ARP00820
KO Cover Plates 2"-2-1/2"



ARP00822
KO Cover Plates 3"

Durham's 200 Amp Meter Socket Block Assembly

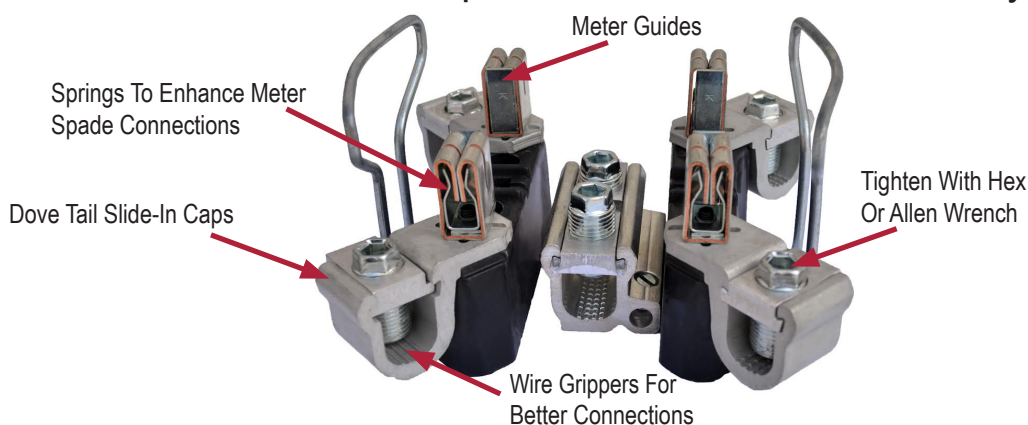

Meter Socket Blocks, Caps & Neutral Assemblies

125, 150 & 200 Amp

Item	125 Amp 2/0	150 Amp 250 MCM	200 Amp 250 MCM	200 Amp 350 MCM
Socket Block Assembly One Side With Caps	 ARP00039	 ARP00354	 ARP00048	 ARP00048
Horn Bypass Socket Block Assembly One Side With Caps	 ARP00351	 ARP00049	 ARP00049	 ARP00049
Triplex Neutral With Caps	 ARP00040	 ARP00050	 ARP00050	 ARP00050
Quadplex Neutral With Caps	 ARP00046	 ARP01745	 ARP01745	 ARP01745
Socket Cap Or Neutral Cap Assembly	 ARP00041  ARP00391	 ARP01226	 ARP01226	 ARP01226
Horn Bypass Cap Assembly	 ARP00777	150 Amp Horn Bypass Caps Only Included With 1-Side Block Assembly Order ARP00049	200 Amp Horn Bypass Caps Only Included With 1-Side Block Assembly Order ARP00049	200 Amp Horn Bypass Caps Only Included With 1-S ide Block Assembly Order ARP00049

Hub Kits

Small Hubs For 3-5/16"x 3-5/16" Opening | Large Hubs for 5" X 5" Opening

Small Hubs For 3-5/16"x 3-5/16" Opening



Small Hub
Cover Plate
ARP00002



1" Small Hub
ARP00003



1-1/4" Small Hub
ARP00004



1-1/2" Small Hub
ARP00005



2" Small Hub
ARP00006



2-1/2" Small Hub
ARP00007

Large Hubs For 5"x 5" Opening



Large Hub
Cover Plate
ARP00016



3" Large Hub
ARP00019



3-1/2" Large Hub
ARP00020
or
4" Large Hub
ARP00021



Adapter Plate
Large Hub Opening
To Small Hub
Opening
ARP00015



2" Large Hub
(Small 2" Hub
& Large Hub
Adapter Plate)
ARP00017





2-1/2" Large Hub
(Small 2-1/2" Hub
& Large Hub Adapter
Plate) ARP00018

Breaker Kits & Accessories

Catalog Number	Main Breaker	Auxiliary Breaker	Description
			Generator Transfer Switch Main & Auxiliary Breaker Kits
ARP00163	100 Amp	50 Amp	100 Amp Main/50 Amp 2-Pole Hydraulic - Auxiliary Breaker For B114 & SB114
ARP00164	100 Amp	100 Amp	100 Amp Main/100 Amp 2-Pole Hydraulic Auxiliary Breaker For B114 & SB114
ARP01206	200 Amp	50 Amp	200 Amp Main/50 Amp 2-Pole Hydraulic Auxiliary Breaker For B204 & SB204
ARP0986	200 Amp	100 Amp	200 Amp Main/100 Amp 2-Pole Hydraulic Auxiliary Breaker For B204, SB204, 1009883 & 1009556
ARP01708	200 Amp	200 Amp	200 Amp Main/200 Amp 2-Pole Auxiliary Breaker For B205 & SB205
Generator Transfer Switch Main Breaker Kits			
ARP00138	100 Amp	-	100 Amp 2-Pole Bolt-In Hydraulic Main Breaker For B114 & SB114
ARP01878	200 Amp	-	200 Amp 2-Pole Bolt-In Main Breaker For B204, SB204, 1009883 & 1009556
Generator Transfer Switch Auxiliary Breaker Kits			
ARP00137	-	50 Amp	50 Amp 2-Pole Bolt-In Hydraulic Auxiliary Breaker For B114, B204, SB114, SB114 & SB204
ARP00138	-	100 Amp	100 Amp 2-Pole Bolt-In Hydraulic Auxiliary Breaker For B114, B204, SB114, SB114 & SB204, 1009883 & 1009556
ARP00143	-	100 Amp	100 Amp 2-Pole Bolt-In Hydraulic Auxiliary Breaker With Distribution Load Center For B114, B204, SB114, SB114 & SB204
ARP01878			200 Amp 2-Pole Bolt-In Auxiliary Breaker For B205 & SB205
Breaker Kits For Socket Breaker Combos			
ARP01285	200 Amp	-	200 Amp 2-Pole Bolt-In Main Breaker With Line/Load Lugs
ARP01293	150 Amp	-	150 Amp 2-Pole Bolt-In Main Breaker With Line/Load Lugs
ARP01302	125 Amp	-	125 Amp 2-Pole Bolt-In Main Breaker With Line/Load Lugs
ARP00152	100 Amp	-	100 Amp 2-Pole Plug-In Main Breaker
ARP00138	100 Amp	-	100 Amp 2-Pole Bolt-In Hydraulic Main Breaker
ARP00143	100 Amp	-	100 Amp 2-Pole Bolt-In Hydraulic Main Breaker With Distribution Load Center
Distribution Load Centers For DH, DP, DR & DC Style Socket Breaker Combos			
ARP00977	-	-	Distribution Load Center Assembly For DH, DR & DP Style Socket Breaker Combo Units - (3) #14-1/0
ARP01464	-	-	Distribution Load Center Assembly For DC Style Socket Breaker Combo Units - (2) #6-250, (1) #14-2/0

• Note: If not sure of correct breaker kit contact representative or factory and provide catalog number and date stamp of the unit.

2-Pole 200 Amp Main & 100 Amp Auxiliary Breaker		2-Pole 100 Amp Bolt-In Hydraulic Auxiliary Breaker	2-Pole 100 Amp Plug-In Main Breaker	2-Pole 200 Amp Bolt-In Main Breaker
ARP02130 - Complete Brk Kit for SB204DT-50 ARP02131 - Complete Brk Kit for SB204DT-100 ARP02132 - Complete Brk Kit for SB205DT200 		ARP00138 	ARP00152 	ARP01285 
DH, DP & DR Style Distribution Load Center	DC Style Distribution Center & Neutral	50 Amp Twist Lock Male Receptacle	50 Amp Twist Lock Female Receptacle	
ARP00977 	ARP01464 	ARP00176 	ARP00177 	


Conductor Lugs



TC0




TC0R

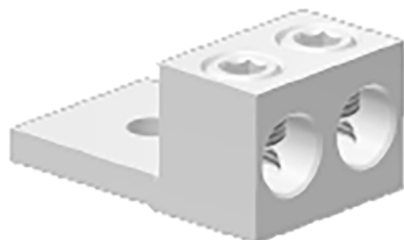


TC2502



Back View




SC350-2

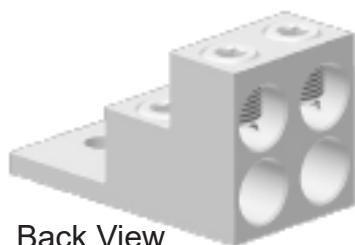

Back View

SC350-4



Single Conductor Lugs						
Catalog Number	Wire CU-AL	Stud Size	Height	Width	Length	Slot/ Hex Size
TC0	14-1/0	1/4	25/32	5/8	1-15/32	Slotted
TC00	14-2/0	1/4	25/32	5/8	1-15/32	Slotted
TC250	250-6	3/8	1-1/16	1	1-15/16	5/16
TC350	350-6	3/8	1-1/8	1-1/8	2-1/8	5/16
TC500	500-4	1/2	1-1/2	1-3/8	2-3/4	1/2
TC600	600-4	1/2	1-1/2	1-3/8	2-3/4	1/2


Single Conductor Lugs With Anti-Rotation Feature						
Catalog Number	Wire CU-AL	Stud Size	Height	Width	Length	Slot/ Hex Size
TC0R	14-1/0	1/4	25/32	5/8	1-15/32	Slotted
TC00R	14-2/0	1/4	25/32	5/8	1-15/32	Slotted
TC250R	250-6	3/8	1-1/16	1	1-15/16	5/16
TC350R	350-6	3/8	1-1/8	1-1/8	2-1/8	5/16
TC500R	500-4	1/2	1-1/2	1-3/8	2-3/4	1/2
TC600R	600-4	1/2	1-1/2	1-3/8	2-3/4	1/2

Two Conductor Lugs							
Catalog Number	Wire CU-AL	Stud Size	Height	Width	Tang Width	Length	Hex Size
TC250-2	250-6	3/8	1-3/16	1-5/8	1-1/2	2-9/16	5/16
TC350-2	350-6	1/2	1-1/4	1-15/16	1-3/4	2-7/8	5/16
TC500-2	500-6	1/2	2-3/8	2-3/8	2	3-1/8	1-1/2
TC600-2	600-4	1/2	2-3/8	2-3/8	2	3-1/8	1-1/2

Stacked Two, Three & Four Conductor Lugs						
Catalog Number	Wire CU-AL	Stud Size	Height	Width	Length	Hex Size
SC350-2	350-6	3/8	2	63/64	3-31/64	5/16
SC350-4	350-6	3/8	2	1-57/64	3-31/64	5/16

- Suitable for use with copper or aluminum conductors.
- Manufactured from high strength 6061-T6 aluminum alloy.
- Provides premium electrical & mechanical performance.
- 90 Degrees C rated for 600V.
- Most items are available in different combinations including stud sizes, hex sizes, etc.
- Contact representative or factory for any variations needed.

UB – Secondary Stud Mounted Transformer Connectors

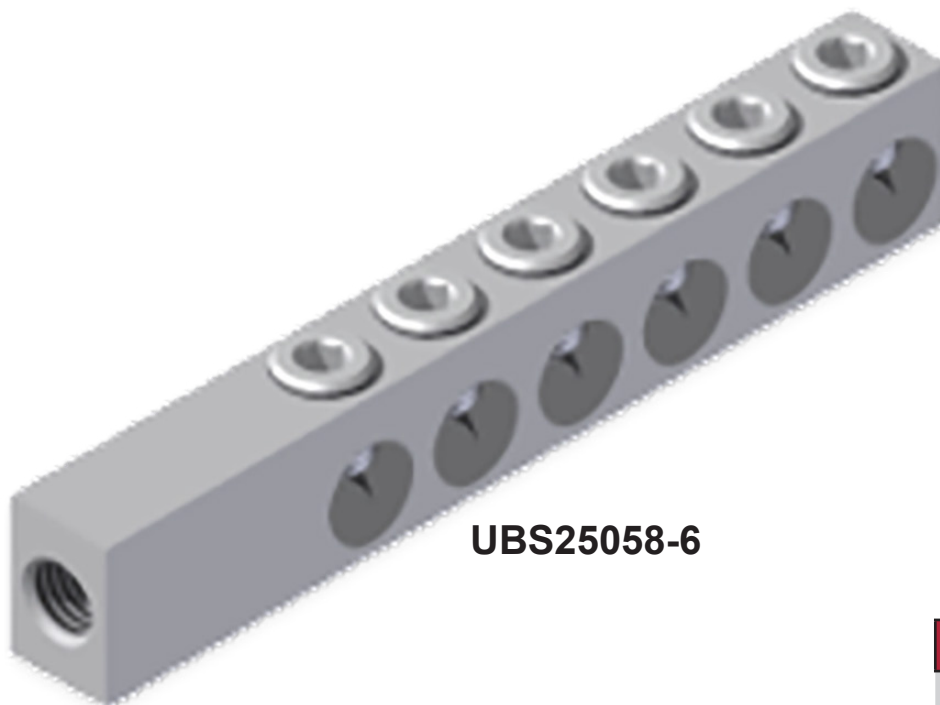

UBS25058-6

Available Options

SL	Street Light Port
T	Tin Plating
C	Slip-On Cover
E	Encapsulated
I	Inhibitor

Cat. No.		Wire Range	Stud Size In Inches	Conductor Ports	Height	Width	Length	Hex Size
Slip-Fit	Thread-On							
UBS25058-4	UBT25058-4	250-12	5/8-11	4	1 1/8	7/8	4 3/4	5/16
UBS25058-6	UBT25058-6	250-12	5/8-11	6	1 1/8	7/8	6 3/8	5/16
UBS25058-8	UBT25058-8	250-12	5/8-11	8	1 1/8	7/8	8	5/16
UBS35058-4	UBT35058-4	350-12	5/8-11	4	1 1/4	7/8	5 9/16	5/16
UBS35058-6	UBT35058-6	350-12	5/8-11	6	1 1/4	7/8	5 9/16	5/16
UBS35058-8	UBT35058-8	350-12	5/8-11	8	1 1/4	7/8	7 9/16	5/16
UBS5001-4	UBT5001-4	500-6	1-14	4	1 5/8	1 5/16	6 13/16	5/16
UBS5001-6	UBT5001-6	500-6	1-14	6	1 5/8	1 5/16	8 15/16	5/16
UBS5001-8	UBT5001-8	500-6	1-14	8	1 5/8	1 5/16	11 1/8	5/16
UBS7501-4	UBT7501-4	750-1/0	1-14	4	1 7/8	1 3/8	7 3/8	5/16
UBS7501-6	UBT7501-6	750-1/0	1-14	6	1 7/8	1 3/8	10 1/8	5/16
UBS7501-8	UBT7501-8	750-1/0	1-14	8	1 7/8	1 3/8	12 3/4	5/16

UB - Secondary Stud Mounted Transformer Connectors



UBCS500-33SL

- Suitable for use with copper or aluminum conductors
- Manufactured from high strength, high conductivity aluminum alloy
- Set Screws are tin-plated and waxed for corrosion protection and torque consistency

Available Options


SL	Street Light Port
T	Tin Plating
C	Slip-On Cover
E	Encapsulated
I	Inhibitor

Cat. No.		Wire Range	Stud Size In Inches	Conductor Ports	Height	Width	Length	Hex Size
Slip-Fit	Thread-On							
UBCS350-33	UBCT350-33	350-12	5/8-1	6	2 27/32	2 3/16	5 3/8	5/16
UBCS350-44	UBCT350-44	350-12	5/8-1	8	2 27/32	2 3/16	6 1/4	5/16
UBCS500-33	UBCT500-33	500-6	5/8-1	6	2 27/32	2 3/16	5 11/16	5/16
UBCS500-44	UBCT500-44	500-6	5/8-1	8	2 27/32	2 3/16	6 13/16	5/16
UBCS750-33	UBCT750-33	750-1/0	5/8-1	6	3 1/8	2 7/16	6 1/16	5/16
UBCS750-44	UBCT750-44	750-1/0	5/8-1	8	3 1/8	2 7/16	7 5/8	5/16

UB - Universal

Stud Mounted Transformer Connectors

C-LINE UB-UNIVERSAL

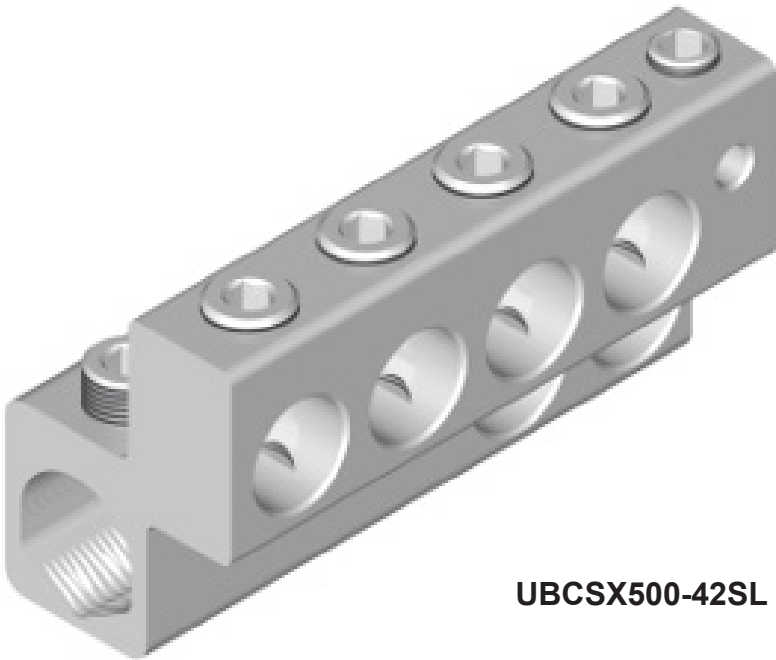


UBCSX500-42SL

- Patent #7,931,508
- Suitable for use with copper or aluminum conductors
- Manufactured from high strength, high conductivity aluminum alloy
- Set Screws are tin-plated and waxed for corrosion protection and torque consistency

Cat. No.	Wire Range	Stud Size In Inches	Conductor Ports	Height	Width	Length	Hex Size
UBCSX350-42	350-12	5/8-1	6	2 27/32	2 3/16	4 3/4	5/16
UBCSX350-53	350-12	5/8-1	8	2 27/32	2 3/16	5 3/4	5/16
UBCSX500-42	500-6	5/8-1	6	2 27/32	2 3/16	5 1/4	5/16
UBCSX500-53	500-6	5/8-1	8	2 27/32	2 3/16	6 3/8	5/16
UBCSX600-42	600-6	5/8-1	6	3 1/8	2 7/16	5 3/4	5/16
UBCSX600-53	600-6	5/8-1	8	3 1/8	2 7/16	7	5/16
UBCSX750-42	750-1/0	5/8-1	6	3 1/8	2 7/16	6	5/16
UBCSX750-53	750-1/0	5/8-1	8	3 1/8	2 7/16	7 5/16	5/16

Pole Type: Transformer Eye Bolt

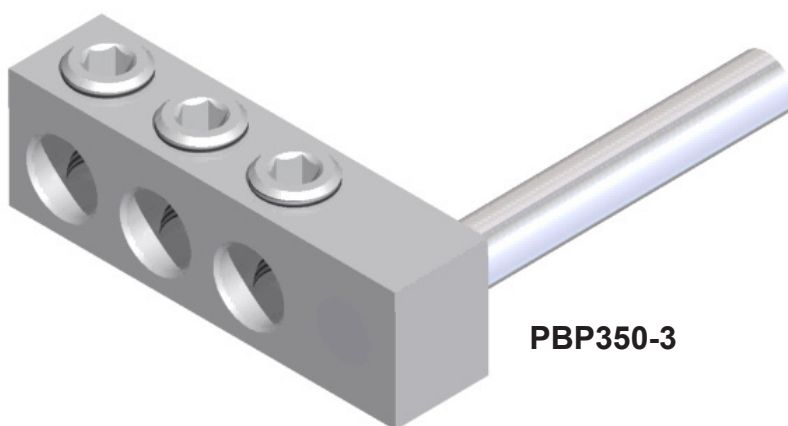

PBP350-3

- Copper Pin is Tin Plated
- Manufactured from high strength, high conductivity aluminum alloy
- Set Screws are tin-plated and waxed for corrosion protection and torque consistency


Available Options

T	Tin Plating
I	Inhibitor

Cat. No.	Wire Range	Conductor Ports	CU PIN Diameter	PIN Length	Height	Width	Length	Hex Size
PBP0-2	1/0-14	2	3/8	3	7/8	5/8	1 7/8	SLOT
PBP0-4	1/0-14	4	3/8	3	7/8	5/8	3 1/16	SLOT
PBP250-2	250-6	2	1/2	4	1 1/8	7/8	2 11/16	5/16
PBP250-3	250-6	3	1/2	4	1 1/8	7/8	3 1/2	5/16
PBP250-4	250-6	4	1/2	4	1 1/8	7/8	4 5/16	5/16
PBP250-5	250-6	5	1/2	4	1 1/8	7/8	5 1/8	5/16
PBP250-6	250-6	6	1/2	4	1 1/8	7/8	5 15/16	5/16
PBP250-7	250-6	7	1/2	4	1 1/8	7/8	6 3/4	5/16
PBP250-8	250-6	8	1/2	4	1 1/8	7/8	7 9/16	5/16
PBP350-2	350-6	2	5/8	4	1 1/4	7/8	3 1/4	5/16
PBP350-3	350-6	3	5/8	4	1 1/4	7/8	4 1/4	5/16
PBP350-4	350-6	4	5/8	4	1 1/4	7/8	5 1/4	5/16
PBP350-5	350-6	5	5/8	4	1 1/4	7/8	6 1/4	5/16
PBP350-6	350-6	6	5/8	4	1 1/4	7/8	7 1/4	5/16
PBP350-7	350-6	7	5/8	4	1 1/4	7/8	8 1/4	5/16
PBP350-8	350-6	8	5/8	4	1 1/4	7/8	9 1/4	5/16
PBP500-2	500-4	2	3/4	4 1/2	1 5/8	1 5/16	3 5/8	5/16
PBP500-3	500-4	3	3/4	4 1/2	1 5/8	1 5/16	4 3/4	5/16
PBP500-4	500-4	4	3/4	4 1/2	1 5/8	1 5/16	5 7/8	5/16
PBP500-5	500-4	5	3/4	4 1/2	1 5/8	1 5/16	7	5/16
PBP500-6	500-4	6	3/4	4 1/2	1 5/8	1 5/16	8 1/8	5/16
PBP500-7	500-4	7	3/4	4 1/2	1 5/8	1 5/16	9 1/4	5/16
PBP500-8	500-4	8	3/4	4 1/2	1 5/8	1 5/16	10 3/8	5/16
PBP750-2	750-1/0	2	3/4	5 1/2	1 7/8	1 3/8	4 3/8	5/16
PBP750-3	750-1/0	3	3/4	5 1/2	1 7/8	1 3/8	5 11/16	5/16
PBP750-4	750-1/0	4	3/4	5 1/2	1 7/8	1 3/8	7	5/16
PBP750-5	750-1/0	5	3/4	5 1/2	1 7/8	1 3/8	8 5/16	5/16
PBP750-6	750-1/0	6	3/4	5 1/2	1 7/8	1 3/8	9 5/8	5/16
PBP750-7	750-1/0	7	3/4	5 1/2	1 7/8	1 3/8	10 15/16	5/16
PBP750-8	750-1/0	8	3/4	5 1/2	1 7/8	1 3/8	12 1/4	5/16

Pole Type: Transformer Eye Bolt

C-LINE POLE TYPE

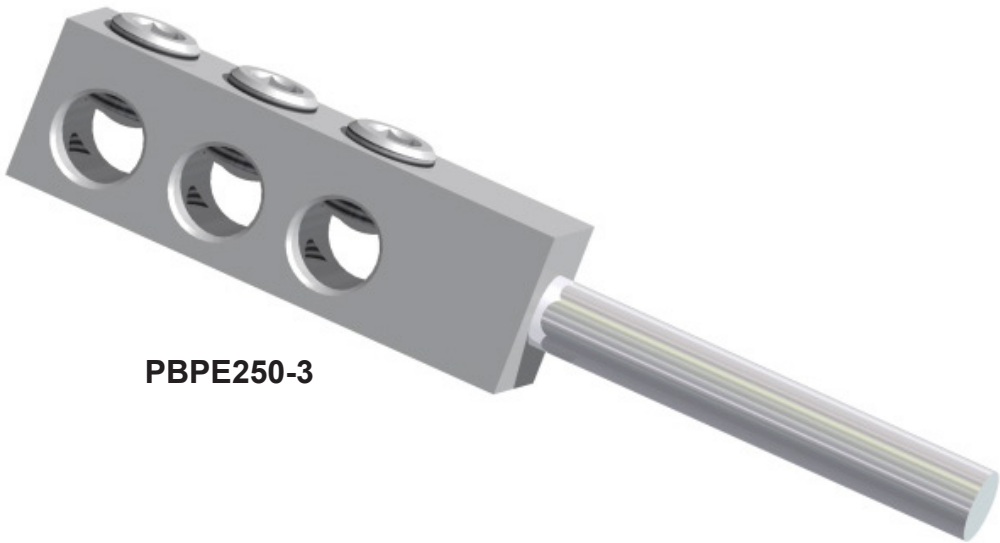

PBPE250-3

Available Options

T	Tin Plating
I	Inhibitor

- Copper Pin is Tin Plated
- Manufactured from high strength, high conductivity aluminum alloy
- Set Screws are tin-plated and waxed for corrosion protection and torque consistency



Cat. No.	Wire Range	Conductor Ports	CU PIN Diameter	PIN Length	Height	Width	Length	Hex Size
PBPE250-2	250-6	2	1/2	4	1 18	7/8	2 11/16	5/16
PBPE250-3	250-6	3	1/2	4	1 18	7/8	3 1/2	5/16
PBPE250-4	500-6	6	1/2	4	1 18	7/8	4 5/16	5/16
PBPE250-5	500-6	8	1/2	4	1 18	7/8	5 1/8	5/16
PBPE250-6	600-6	6	1/2	4	1 18	7/8	5 15/16	5/16

Pad Mount Transformer Extension Bars/Transformer Lugs

C-Line Series | 1500 Amperes | 600 Volts

Eliminate Unnecessary Time And Expense with Extension Bars!

These Extensions Upgrade Pad Mount Transformers And Other Equipment When The Conductors Are Too Short.

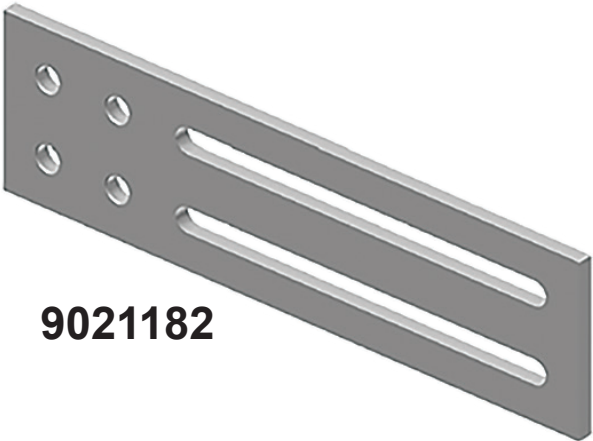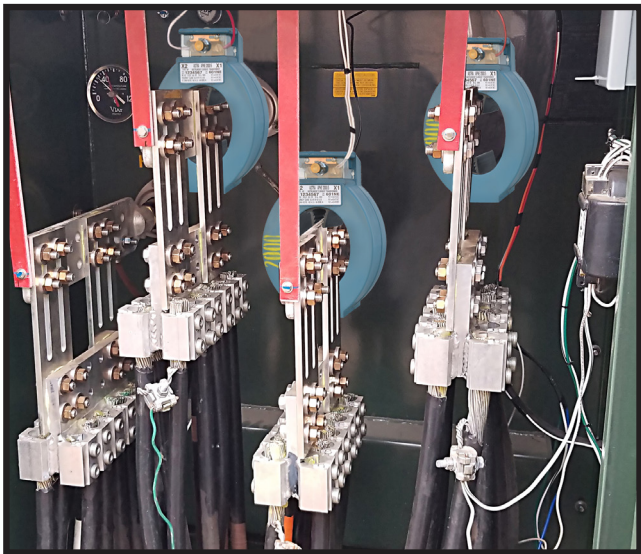

9021182


EXTENSION BARS

Catalog Number	Ampacity Amps	Bar Dimensions			Bar Dimensions	
		A"	B"	C"	Thickness "	Width "
9021182	1500	12	8	6.250	3/8	4
902166	1500	14.5	10.5	8.75	3/8	4
902166	1500	16	12	10.25	3/8	4
902161	1500	18	14	12.25	3/8	4
902153	1500	24	20	18.250	3/8	4
902176	1500	28	24	22.250	3/8	4


Connectors		
Catalog Number	Wire Range	Conductor Ports
UTLH750-84	1/0-750	4
UTLH750-106	1/0-750	6
UTLH1000-84	350-1000	4
UTLH1000-126	350-1000	6

- Copper Construction
- Electro-Tin plated to inhibit corrosion providing low contact resistance
- Slotted for flexible height adjustment
- NEMA bolt hole spacing of 1-3/4 "
- 1500 ampere ampacity.
- Contact representative or factory for other configurations.


Fastening Bolt Kits		
Catalog Number	Stainless Steel Bolt Kit	Each Kit Contains
K45-9227	1/2"-13 X 2"	4
K47-9022	1/2"-13-2-1/2"	6

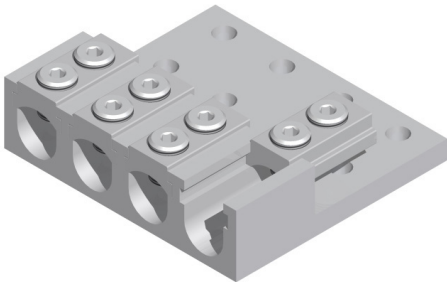

UTLH1000-84

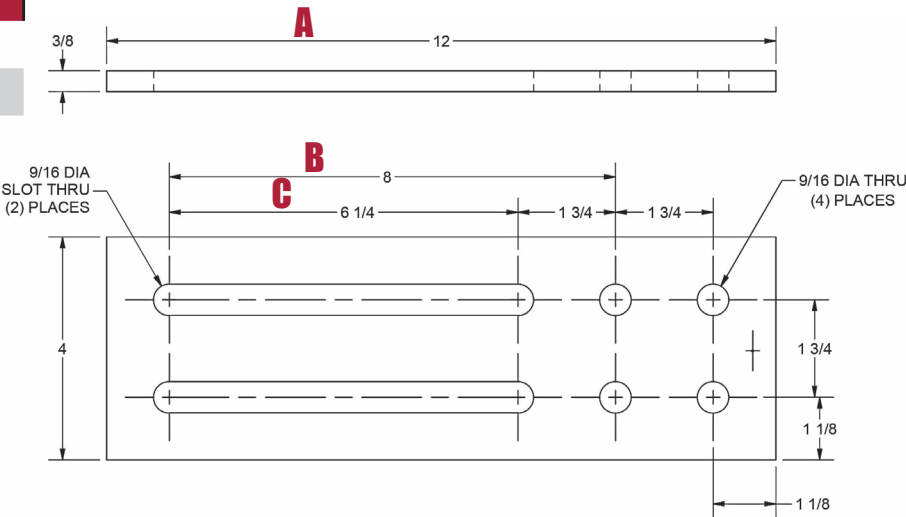

**Delivering Reliable Solutions
to the Electrical Industry
Through Innovative Engineering,
Design and Manufacturing
For A World Class Customer Experience.**

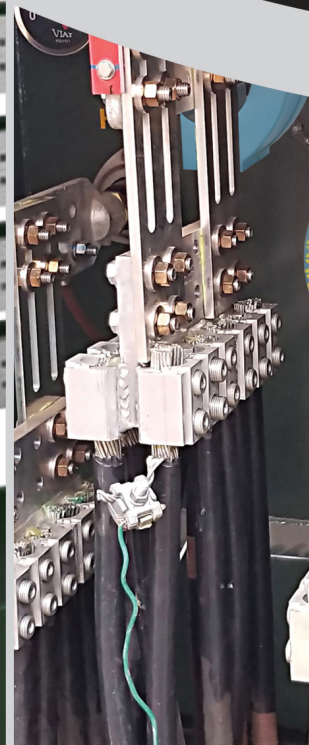

Manufacturer of Quality Electrical Products | Since 1959

The Durham Company | P.O.Box 908, Lebanon, MO 65536 | 417.532.7121 | www.DurhamUSA.com