

Framing on interior
of exterior wall.
Continuous across
head and jambs.
Min double 2x. See
pocket detail for
sizing


1/4" or 1/2" plywood painted black


1/2" plywood screwed to framing

RO Height = Frame + 1"

RO Width = Frame + 1"

Total Rough Opening TRO
TRO = Frame Size + 1"

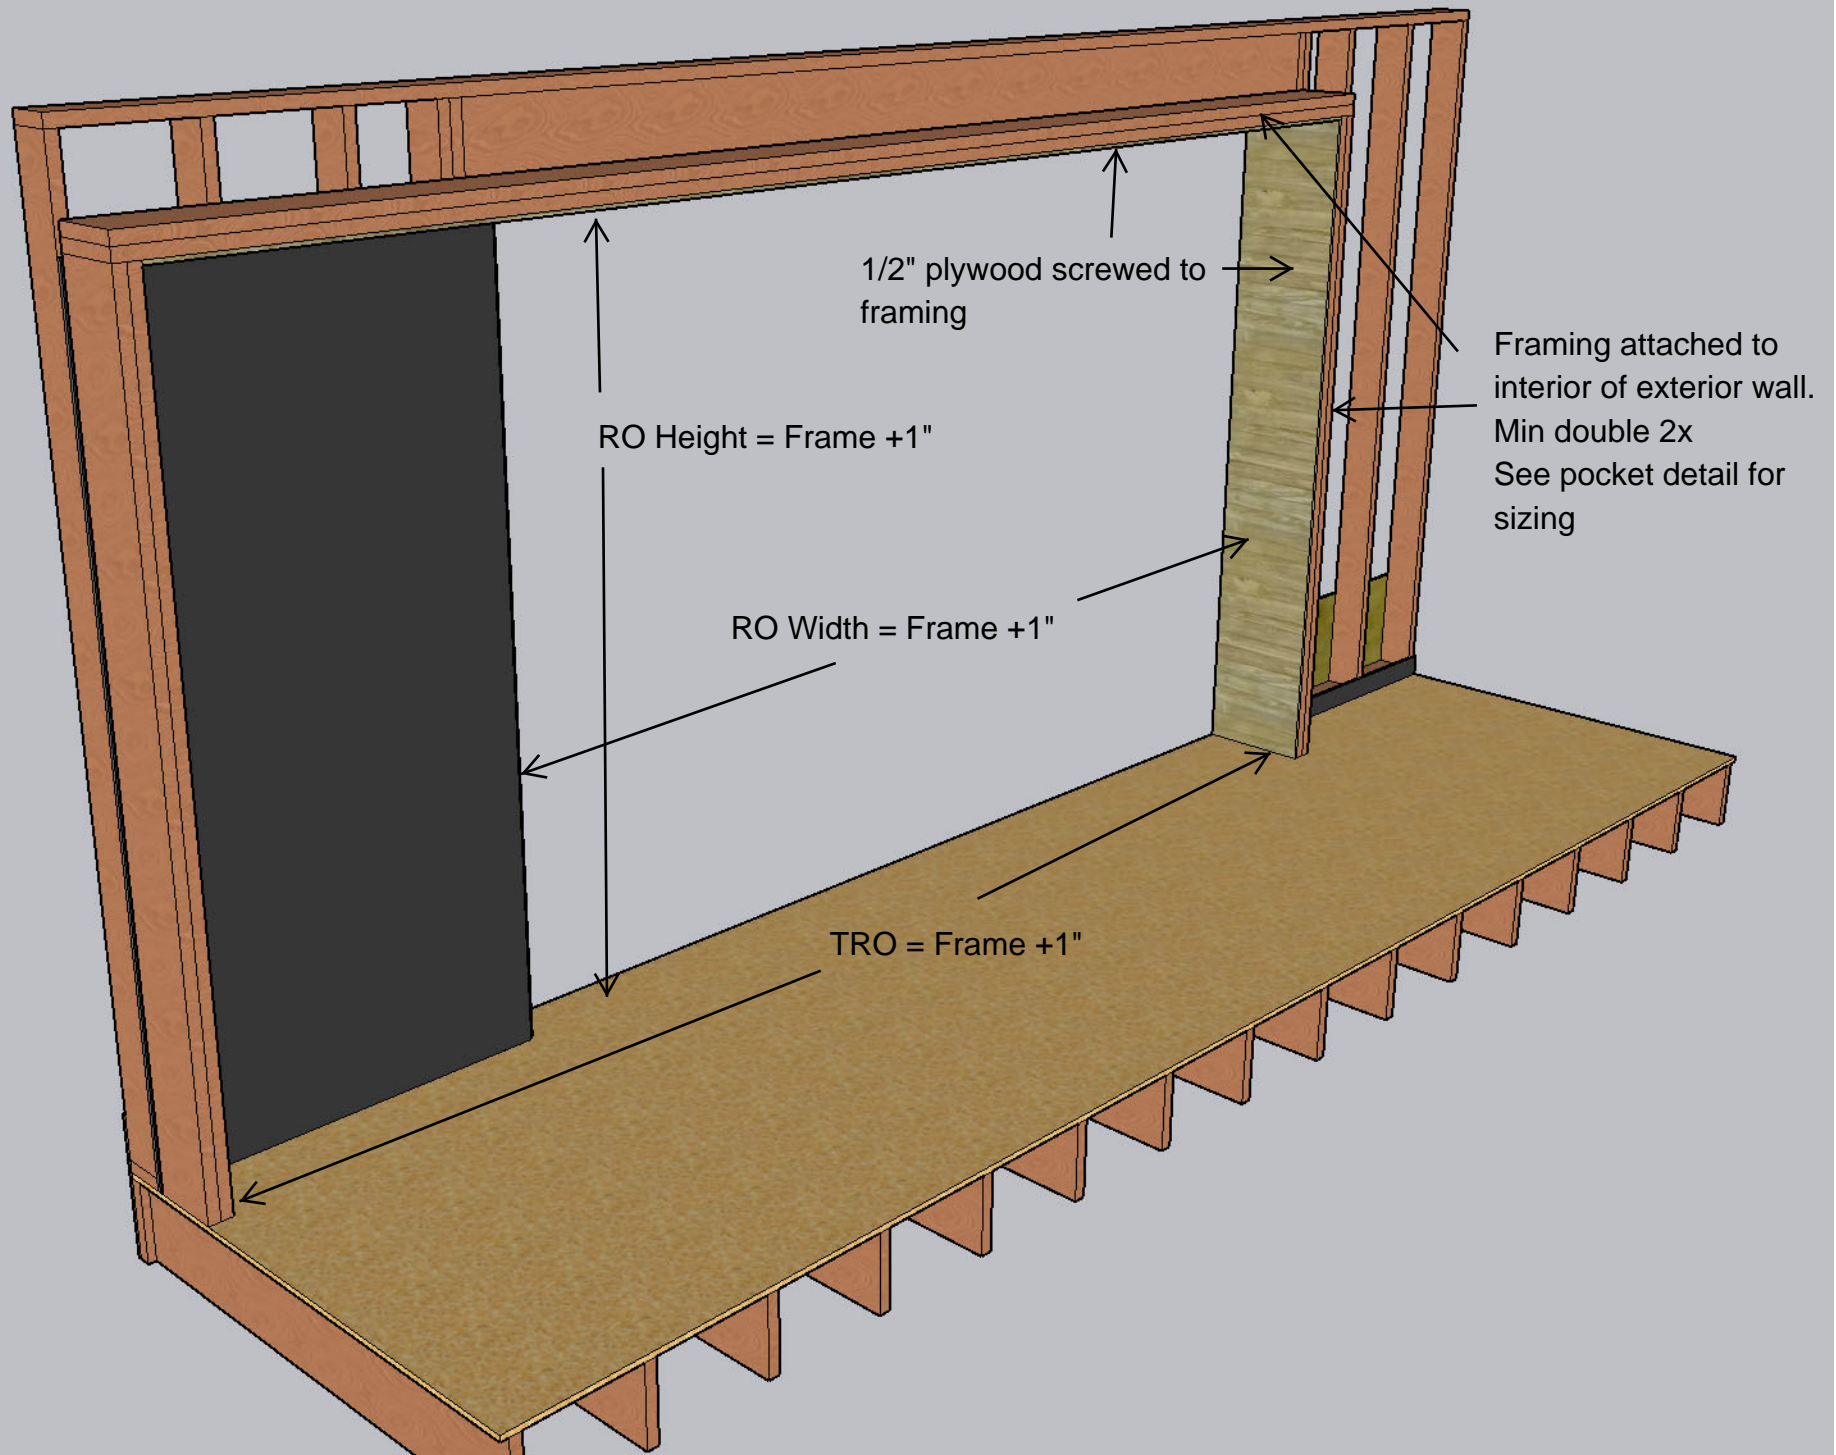

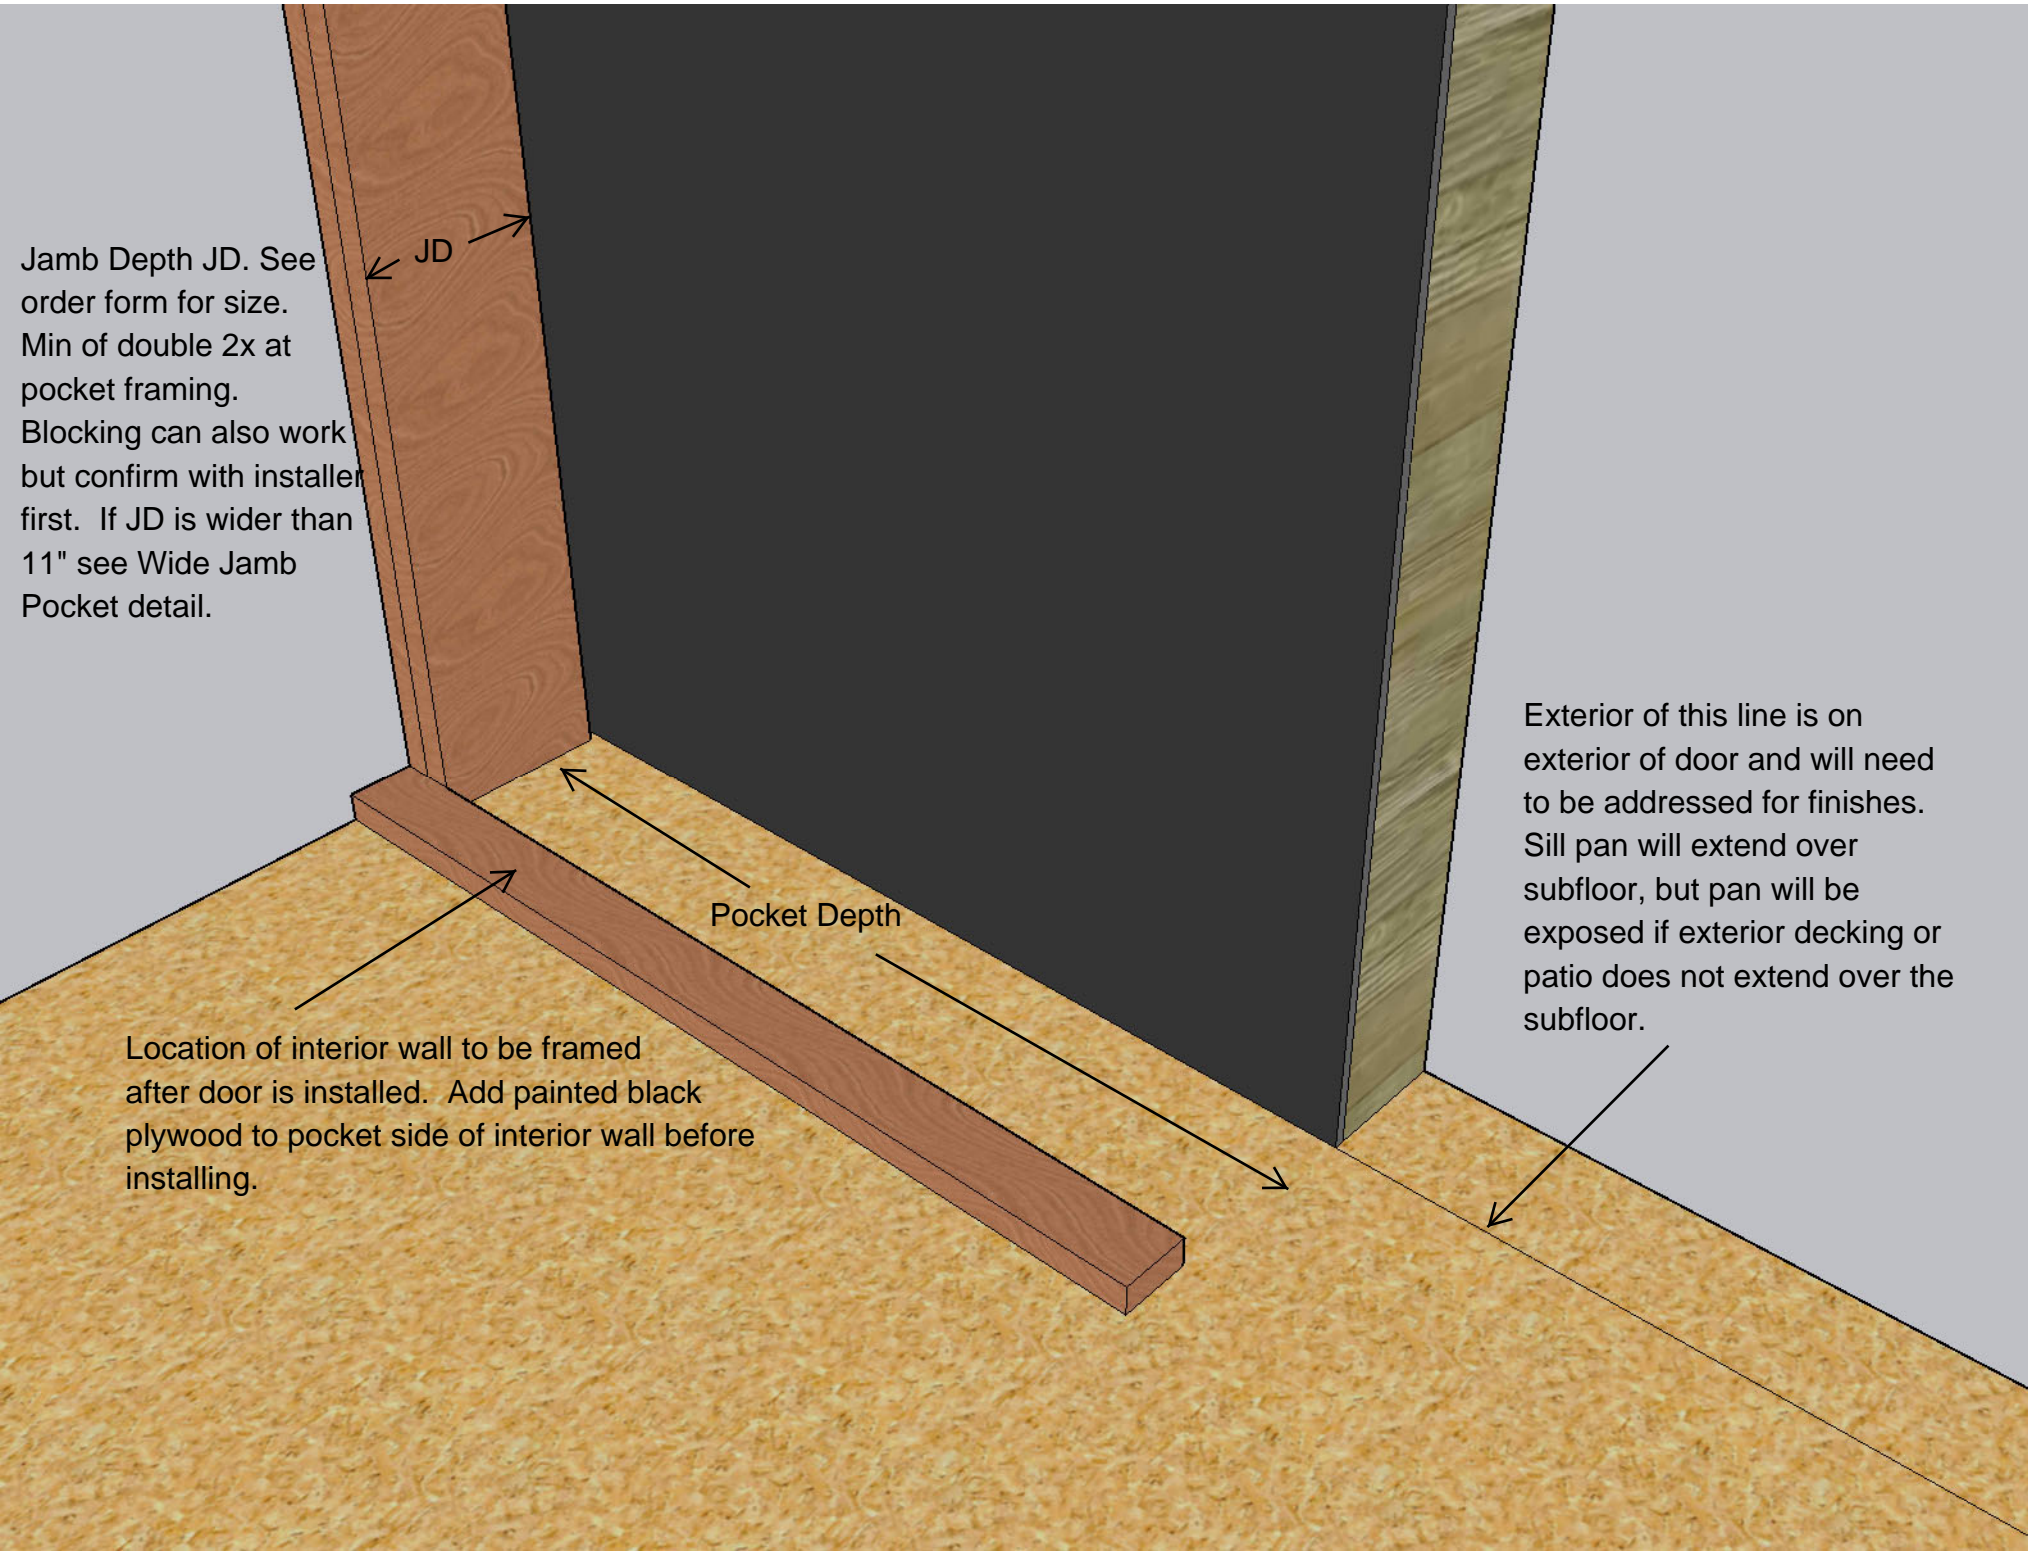


Jamb Depth JD. See order form for size. Min of double 2x at pocket framing. Blocking can also work but confirm with installer first. If JD is wider than 11" see Wide Jamb Pocket detail.

Exterior of this line is on exterior of door and will need to be addressed for finishes. Sill pan will extend over subfloor, but pan will be exposed if exterior decking or patio does not extend over the subfloor.

Location of interior wall to be framed after door is installed. Add painted black plywood to pocket side of interior wall before installing.

Pocket Depth

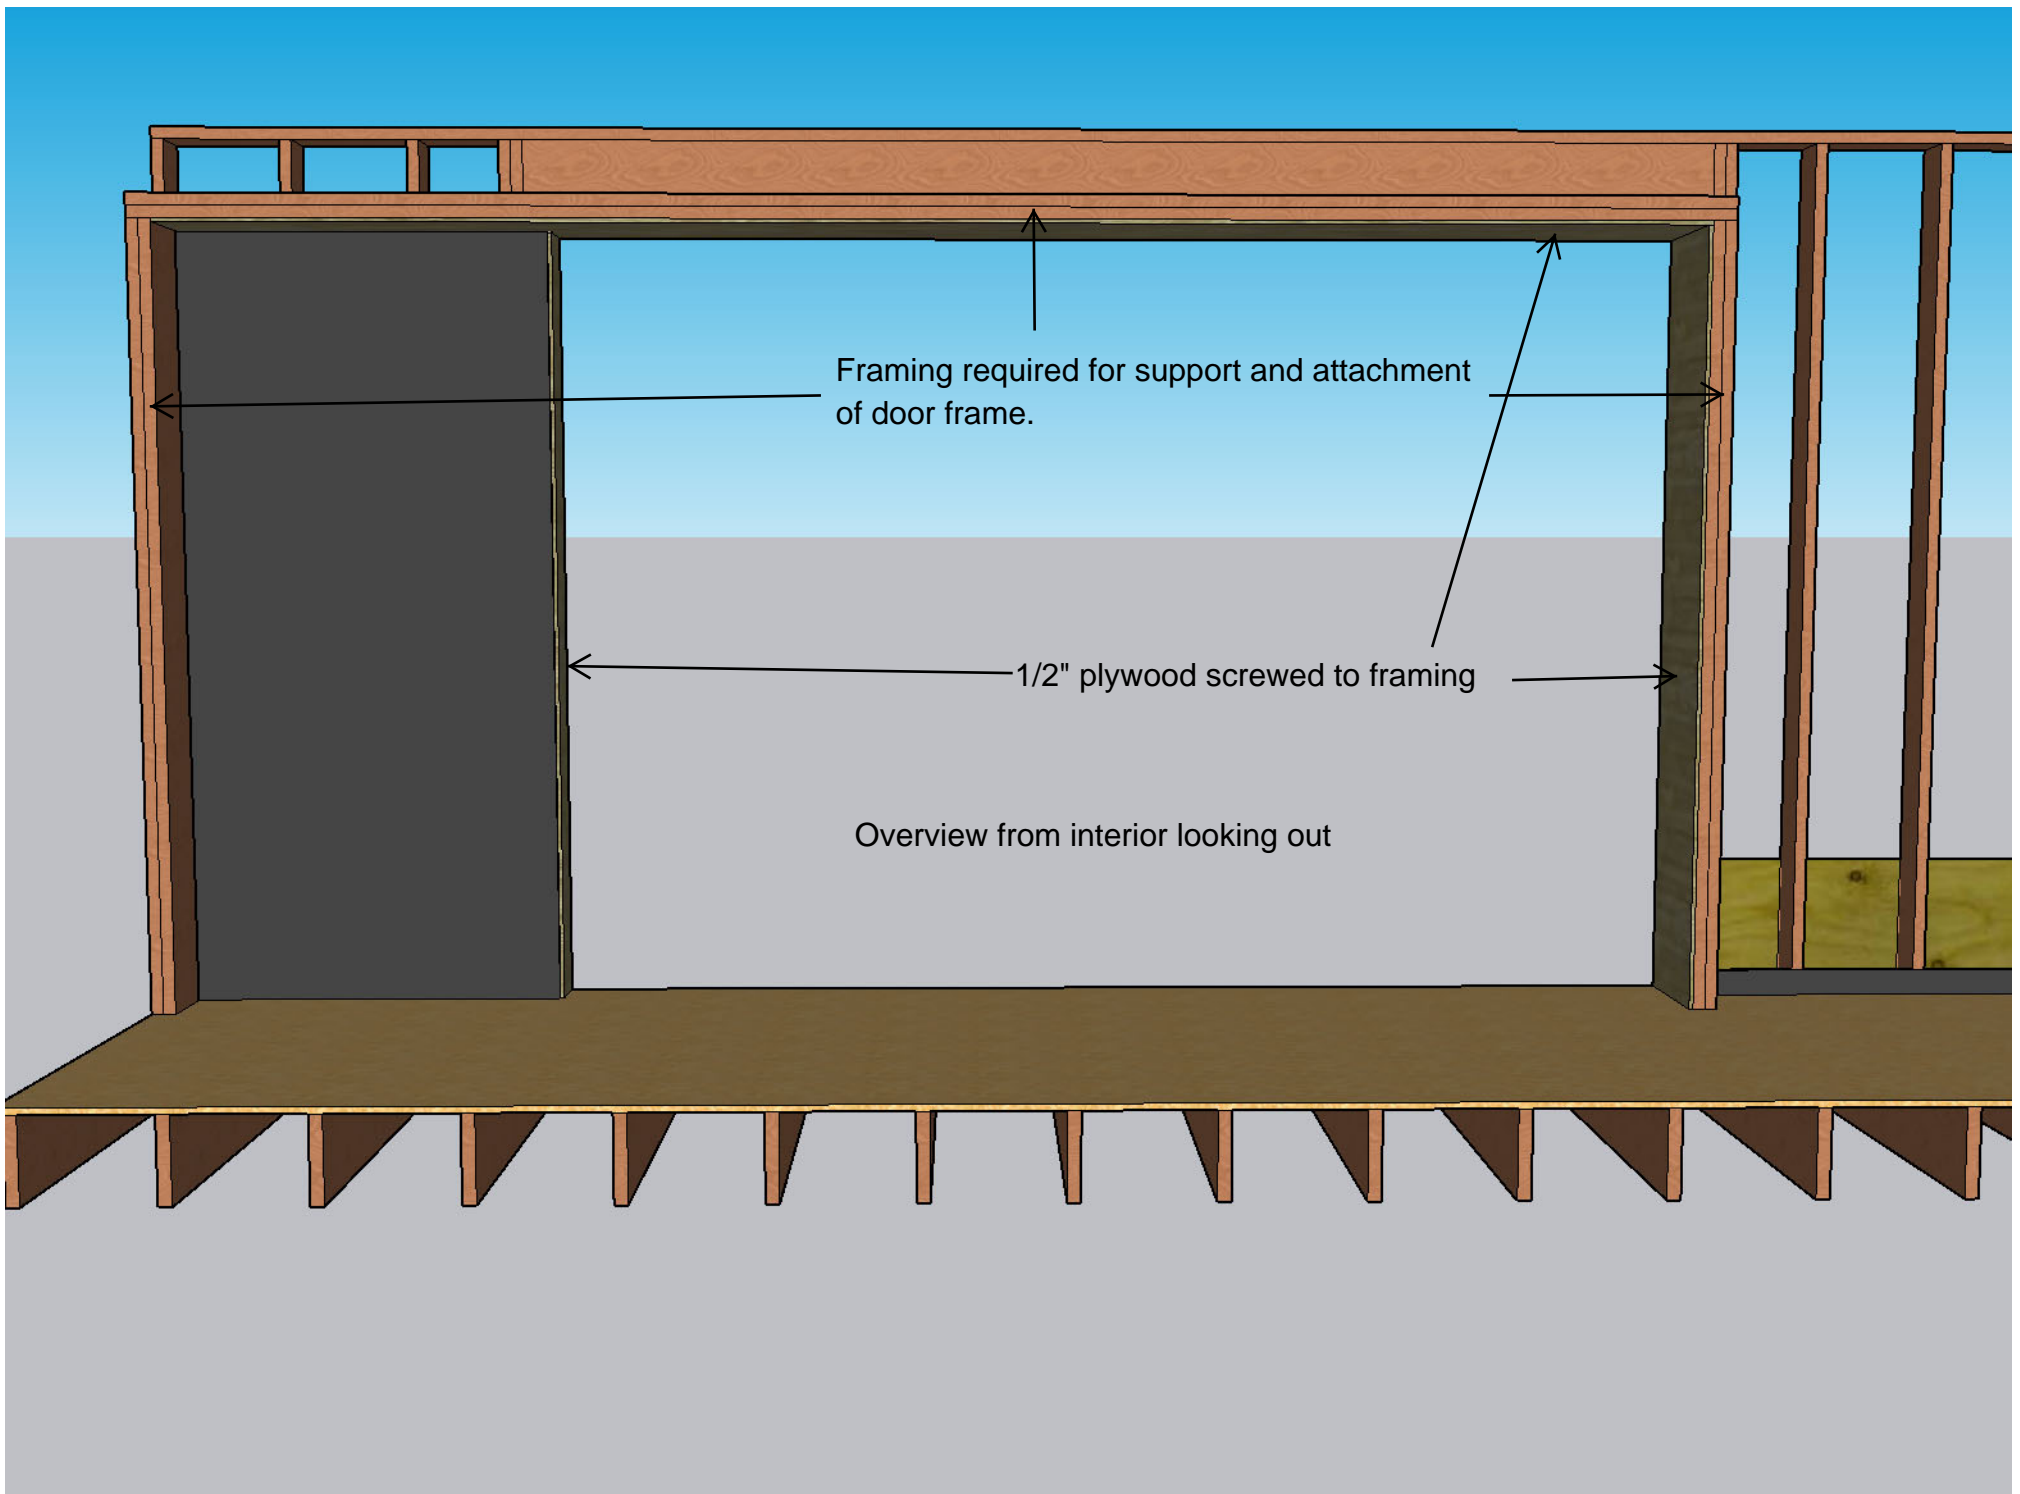

Framing required for support and attachment
of door frame.

1/2" plywood screwed to framing

Overview from interior looking out