
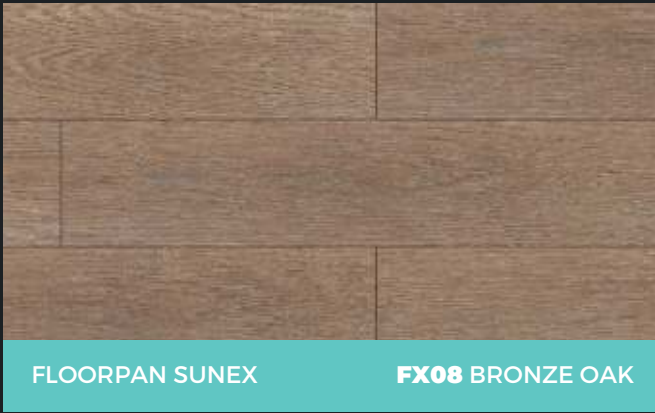
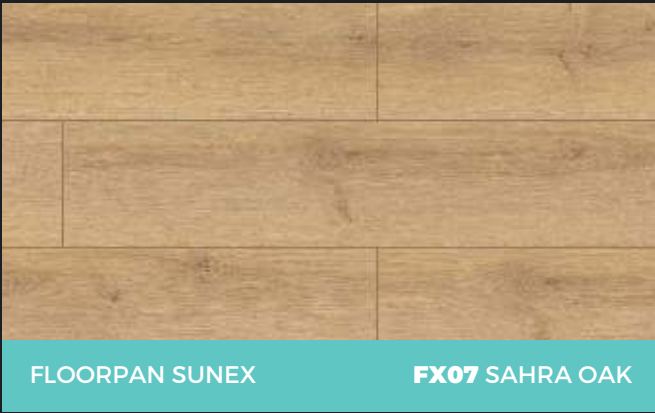


FLOORPAN
Laminate Flooring

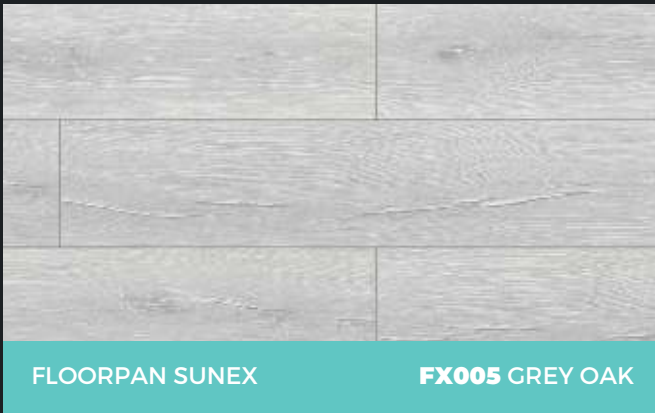

SUNEX

THICKNESS	mm	8	EN 13329 + A1
WIDTH	mm	197	EN 13329 + A1
LENGTH	mm	1205	EN 13329 + A1
SURFACE	Authentic		
EUROPEAN STANDARD	-		EN 13329

PACKAGE DETAILS			
PIECE	10 piece / 1 package		
M2	2,374 m2		
KG	16 kg		

PALLET DETAILS			
PIECE	60 package / 1 pallet		
M2	142,44 m2		
KG	975 kg		

CLASS		-	31	EN 13329+A1
ABRASION RESISTANCE		-	AC3	EN 13329+A1
THICKNESS SWELLING		%	≤18	ISO 24336
RESISTANCE TO IMPACT	SMALL BALL	N	≥8	EN 13329+A1
	LARGE BALL	mm	≥500	
WARRANTY DOMESTIC / COMMERCIAL		Years	10/5	-
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5
SURFACE SOUNDNESS		N/mm²	≥1.0	EN 13329+A1
LOCK STRENGTH	LENGTH	kN/m	-	ISO 24334
	WIDTH	kN/m	-	
EFFECT OF CASTOR CHAIR		"25.000 Cycles"	No Damage	EN 425:2002
EFFECT OF A FURNITURE LEG		-	No Damage	EN 424
OPENING BETWEEN ELEMENTS		mm	≤0,20	EN 13329+A1
HEIGHT DIFFERENCE BETWEEN		mm	≤0,15	EN 13329+A1
ELEMENTS	MOISTURE CONTENT	%	4-10	EN 322
FIRE RESISTANCE		Class	CfiS1	EN 9239-1
FORMALDEHYDE RELEASE		mg/m²h	≤3,5 (E1)	EN 12460-3



FAST
AND EASY
ASSEMBLY



SUITABLE FOR
UNDERFLOOR
HEATING



RESISTANT
TO UV RAYS



RESISTANT
TO POINT
STRIKES



ENVIRON-
MENTALLY
FRIENDLY



HDF



RESISTANT
TO CIGARETTE
FIRE



RESISTANT
TO SCRATCH



EASILY
CLEAN AND
MAINTAINED,
HYGIENIC



NOT AFFECTED
BY STAINS



RESISTANT
TO FURNITURE
WHEEL
ABRASION



E1
GRADE