


# AHD/CVBS/PAL/NTSC Mount-on shutter rear-view camera

## CAM-X120SH

Delivery content



### Installation

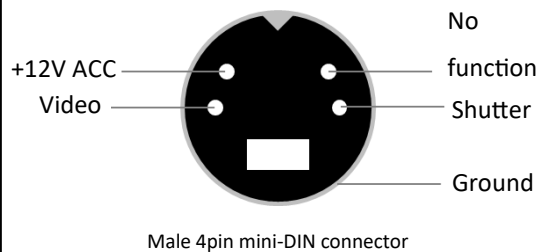

**Note:** If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid vehicle computer errors.

**In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.**

**Do not expose camera to high pressure cleaners.**


### Produktfeatures

- AHD/CVBS Mount-on shutter rear-view camera
- Camera position adjustable stepless vertically
- Sensor-type CMOS 1/4 inch AHD/CVBS/PAL/NTSC switchable
- Resolution 1080p
- Frame rate 25fps (PAL) / 30fps (NTSC) switchable
- Aperture F1.36
- 11 LED for nightvision (Nightvision is displayed in SW for even better visibility)
- Light sensitivity 0.0 Lux (IR on)
- Angle H=130°, V=85°, D=160°
- Mirrored picture (fixed)
- Heater
- Protection class IP69K
- Stainless steel screw, holder, shutter and sunroof in black
- Suitable for permanent power (ACC)
- Camera cable with 4pin mini-DIN male connector with metal thread and SH-assignment (50cm with rubber grommet)

### Specifications

- Camera with holder 117 x 94 x 82mm (W x H x D)
- Operating voltage +12/24V DC
- Current consumption max. 450mA
- Operating temperature range -30°C bis +75°C
- Storage temperature range -40°C bis +80°C

### Camera configuration (remove Jumper if required)

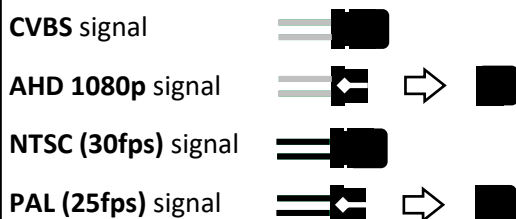

10R-06 0844



Version 2601