
DURALITE

LAFAYETTE, LOUISIANA

LOCALLY OWNED AND OPERATED

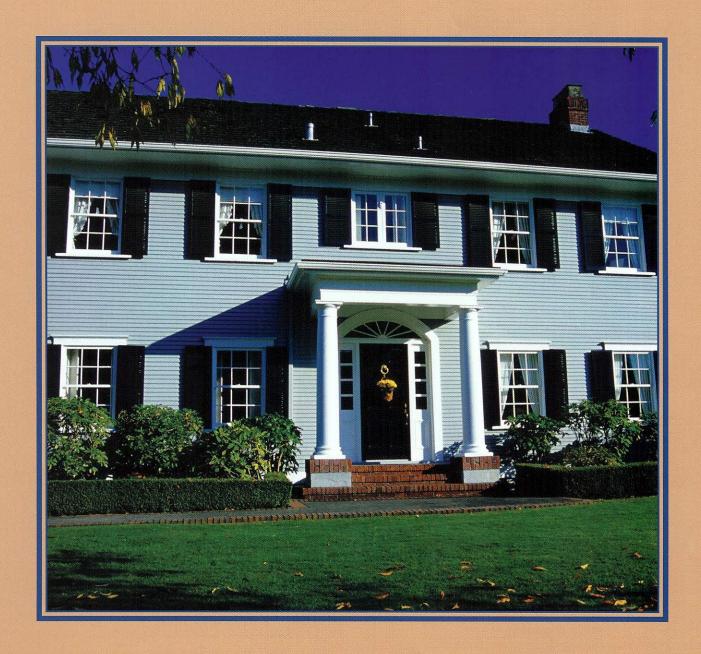

Vinyl Windows

Dave's Screen & Windows, Inc. 1121 Cameron Street Lafayette, LA 70501 (337) 232-5690 www.davesscreen.com



MFG. LIMITATIONS

Width - 44" Height - 72"

BASELINE PERFORMANCE

Thermal Insulation

GLASS	SPACE	Uc Value	SHGC
Clear	Air	0.46	0.54
Tinted	Air	0.46	0.41
Low-E 23	Argon	0.28	0.16
Low-E 36	Argon	0.28	0.25


AAMA RATING: H-R50

FEATURES & BENEFITS Series 7720 Single Hung and Series 7740 Double Hung

- 3-1/4" depth of frame is ideal for most replacement applications.
- Externally glazed operating sash.
- Night vent option for security.
- Integral vinyl interlock with dual weatherstripping keeps the wind and water outside.
- 3/4" glass units are wet glazed for water tight seal.
- Fully welded design components offer strength and increased energy performance - head, sash and sloped sill with compound cuts.
- Additional weatherstripping at sill dam leg for added weather protection.
- Beveled exterior adds pleasing exterior aesthetics.
- Horizontal glazing pocket/bead to facilitate easy glass unit installation.
- Constant force balance system for ease of operation.
- Available in white or tan.
- Snap in auxiliary profiles include J-channel, mulls, brick moldings, drywall receivers and stucco legs.
- Mulls for specialty shapes for Bay and Bow windows.
- Nail fin pocket for new construction.
- Screens available:

Series 7720 Single Hung with 1/2 screen.

Series 7740 Double Hung with full screen.

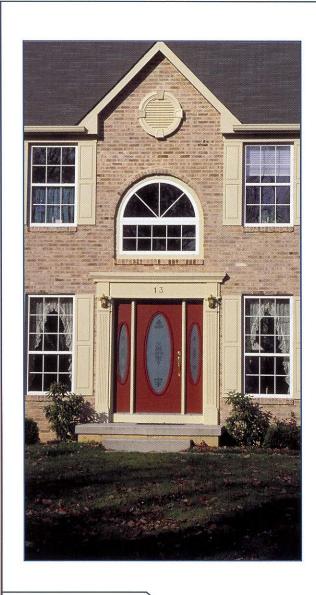

MFG. LIMITATIONS

Width - 48" Height - 72"

BASELINE PERFORMANCE


Thermal Insulation

GLASS	SPACE	Uc Value	SHGC
Clear	Air	0.47	0.52
Tinted	Air	0.47	0.40
Low-E 23	Argon	0.30	0.15
Low-E 36	Argon	0.30	0.24


AAMA RATING: H-R45

GRID OPTIONS


Single and Double Hung



Double Horizontal Slide



Picture Slide



MEMBER OF







SERIES 7760 DOUBLE SLIDER

AAMA Rating HS-R50


MFG. LIMITATIONS

Width - 73" Height - 51"

BASELINE PERFORMANCE

Thermal Insulation

GLASS	SPACE	Uc Value	SHGC
Clear	Air	0.45	0.52
Gray Tinted	Air	0.45	0.40
Low-E 23	Argon	0.28	0.15
Low-E 36	Argon	0.28	0.24



SERIES 7780 PICTURE WINDOW

AAMA Rating C-60

FEATURES & BENEFITS

Series 7780 Picture Window

- 3-1/4" depth of frame is ideal for most replacement applications.
- 3/4" glass units are wet glazed for water tight seal.
- Fully welded design components offer strength and increased energy performance.
- Beveled exterior adds pleasing exterior aesthetics.
- Horizontal glazing pocket/bead to facilitate easy glass unit installation.
- Available in white or tan.
- Snap in auxiliary profiles include J-channel, mulls, brick moldings, drywall receivers and stucco legs.
- Mulls for specialty shapes for Bay and Bow windows.
- Nail fin pocket for new construction.



FEATURES & BENEFITS

Series 7760 Double Slider

- 3-1/4" depth of frame is ideal for most replacement applications.
- Externally glazed operating sash.
- Night vent option for security.
- Integral vinyl interlock with dual weatherstripping keeps the wind and water outside.
- 3/4" glass units are wet glazed for water tight seal.
- Fully welded design components offer strength and increased energy performance - head, sash and sill.
- Beveled exterior adds pleasing exterior aesthetics.
- Horizontal glazing pocket/bead to facilitate easy glass unit installation.
- Available in white or tan.
- Snap in auxiliary profiles include J-channel, mulls, brick moldings, drywall receivers and stucco legs.
- Mulls for specialty shapes for Bay and Bow windows.
- Nail fin pocket for new construction.
- Available with full screen.
- Tandem rollers for easy glide.
- 3 panel slider configuration available.

MFG. LIMITATIONS

Width - 79" Height - 72"

BASELINE PERFORMANCE

Thermal Insulation

GLASS	SPACE	Uc Value	SHGC
Clear	Air	0.44	0.57
Gray Tinted	Air	0.44	0.44
Low-E 23	Argon	0.26	0.17
Low-E 36	Argon	0.26	0.27