


CANOVA 40 CANOVA 40 PVD





| | | |
|----------------|--|--------------|
| Materiale | AISI 304 18/10 | |
| Material | | |
| Spessore | 1 mm regolare | |
| Thickness | 1 mm regular | |
| Finitura | Satinplus | Cod. CA40F |
| Finish | PVD gun metal | Cod. CA40FGM |
| | PVD copper | Cod. CA40FC |
| | PVD gold | Cod. CA40FG |
| Base | 50 cm | |
| Cabinet | | |
| Dim. esterne | 440x440 mm | |
| Ext. dim. | | |
| Dim. vasca | 400x400 mm | |
| Bowl dim. | | |
| Raggio | 12 mm | |
| Radius | | |
| Altezza | 200 mm | |
| Height | | |
| Troppopieno | Integrato | |
| Overflow | Integrated | |
| Piletta | Ø 114 mm Inox satinata – PVD Inox satinata | |
| Waste | Ø 114 mm satin s.steel – PVD satin s.steel | |
| Sifone | incluso | |
| Siphon | Included | |
| Installazione | Tripla (sopra – filo – sotto) | |
| Installation | Triple (top – flush – undermount) | |
| Dim. imballo | 50x50x25 cm | |
| Packaging dim. | | |
| Peso | 7,3 kg | |
| Weight | | |

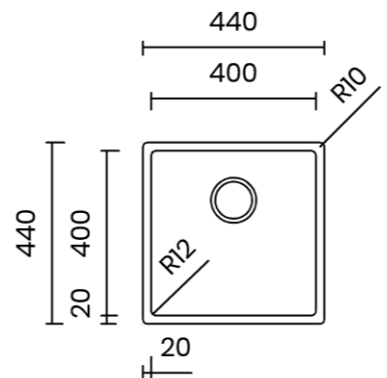


SCHEMI DI INCASSO / CUT-OUT SIZES


SOTTOTOP
Undermount

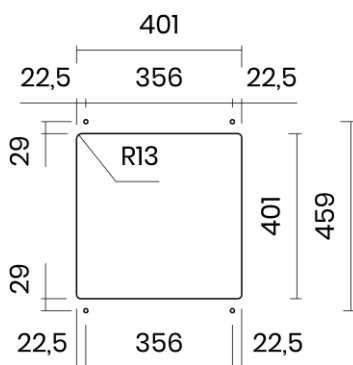


FILOTOP
Flushmount

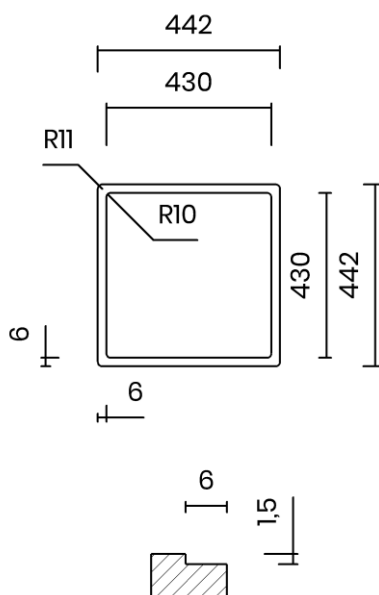

SOPRATOP
Topmount

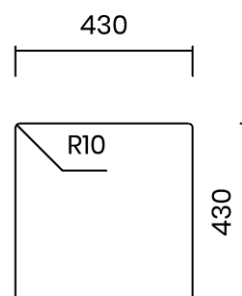

valido per installazione FILOTOP e SOPRATOP /
valid for FLUSHMOUNT and TOPMOUNT installation

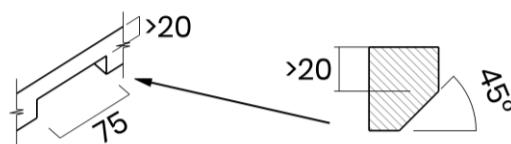

intaglio per troppopieno solo per top >20 mm
recess for housing the overflow only for top >20 mm