
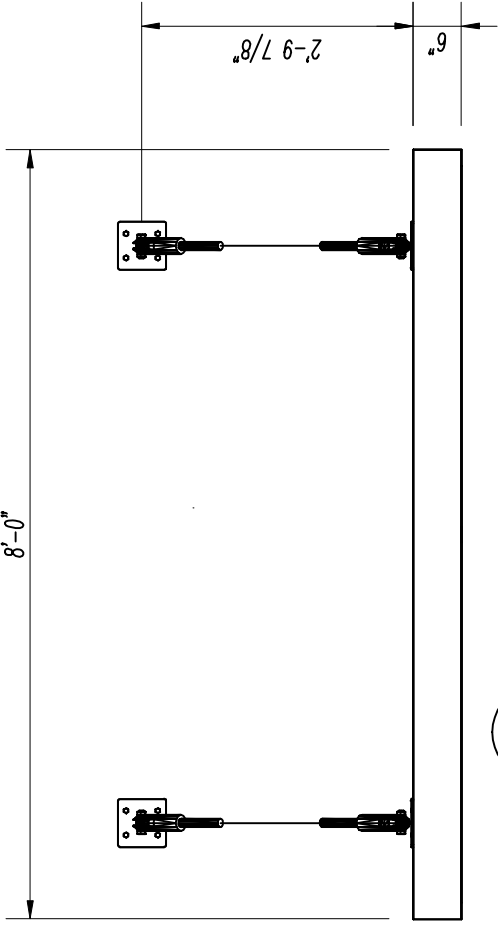


Note:
All framing is made of 2"x6" alum.
Square tube 1/8" wall.
All connections are welded.
See attached certification.




Wind Speed of 120 mph.
Exposure category B
Importance Factor 1.0
Internal Pressure -0.18
Wind Pressure +/- 34 psf.

Note:
This certifies that these plans
meet or exceed the 120 mph,
3 second gust, wind load
requirements of Chapter #16
2004 Edition or the Florida
building code with 2006
amendments.
This also meet the 100 mph
sustained wind requirements.

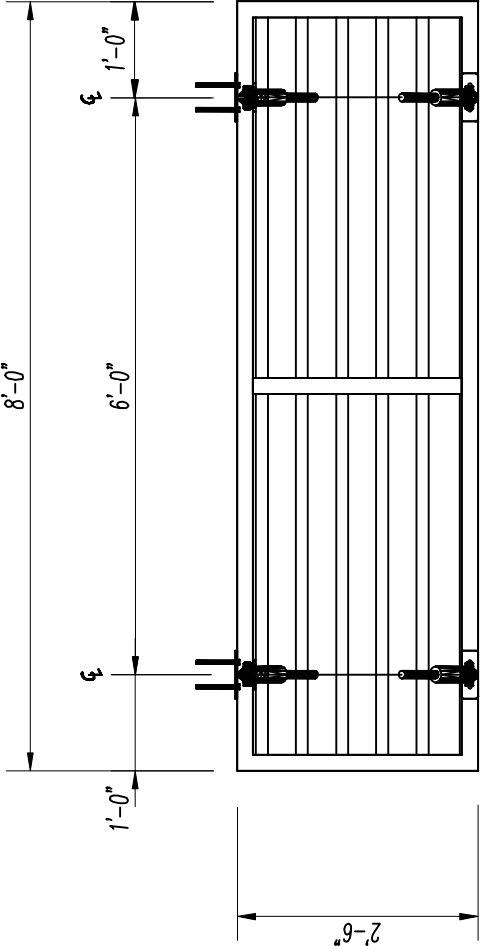

A TOP VIEW

B FRONT VIEW

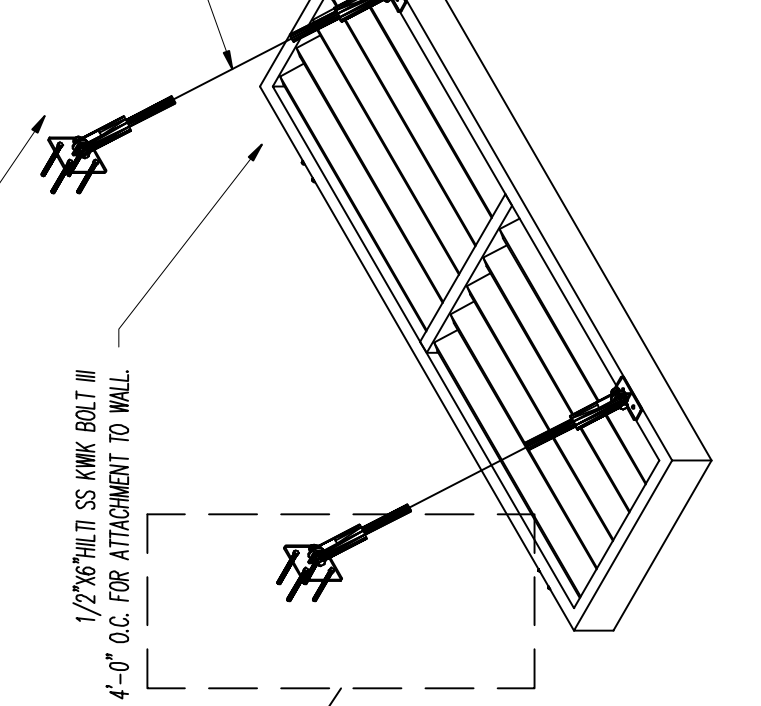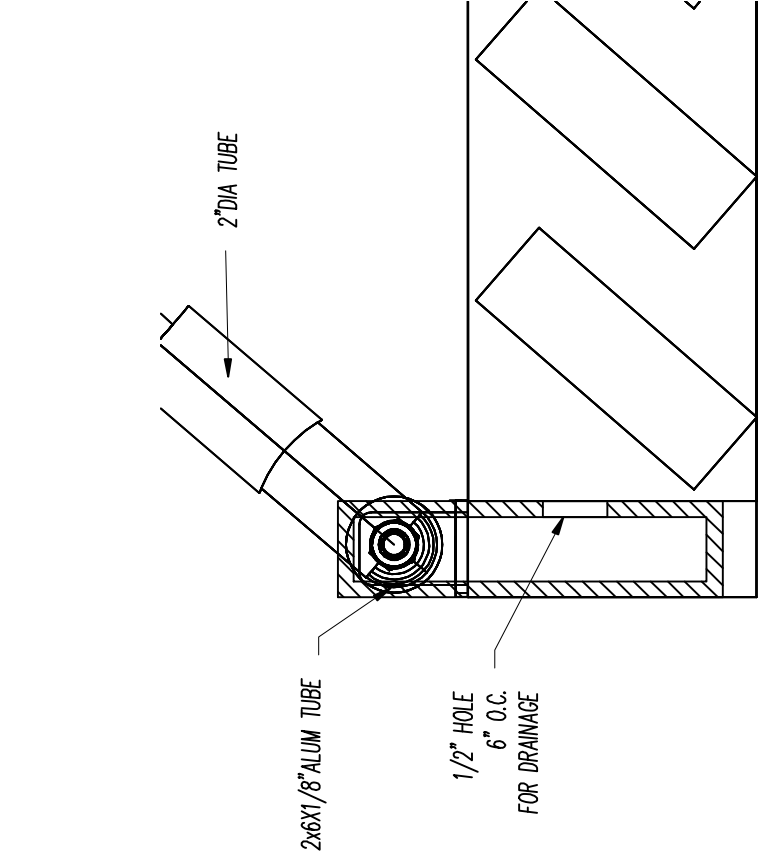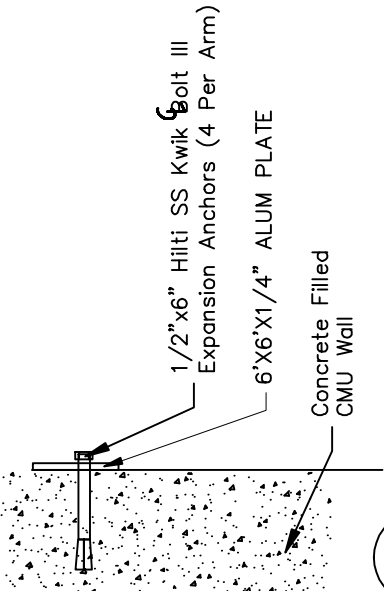

1/2"x6" HILTI SS KWIK BOLT III
4'-0" O.C. FOR ATTACHMENT TO WALL.

F

G WALL ATTACHMENT DETAIL

