



VALID THRU 12/31/26



ALL ITEMS STOCKED &
READY TO SHIP!
UNLESS NOTED AS NON-STOCK

FEATURING:



ITW PRO BRANDS SOLUTIONS



SCRUBS® ALL PURPOSE CLEANING WIPES

See Page 24



6 TUB CASE
MFR #96580
A&M #6476514

\$75.00

Rustlick® WS-5050 WATER SOLUBLE OIL

See Page 15



1 GALLON
MFR #74016
A&M #4557852

\$66.35

LPS® TKX® ALL-PURPOSE LUBRICANT

See Page 6

11 OZ. AEROSOL
MFR #02016
A&M #11435

\$8.09



800.864.2660

WWW.AM-IND.COM



A MORE EFFICIENT & PRODUCTIVE SHOP

Our expert metalworking team can partner with you to evaluate your approach to any application and improve cycle times, set-up, and productivity. To request support or product selection assistance, simply scan the adjacent QR code.



METALWORKING PRODUCT GUIDE



| LAYOUT FLUIDS | |
|---------------|----------------|
| A | STEEL BLUE® |
| B | STEEL RED™ |
| C | REMOVER & PREP |

| LUBRICANTS/PENETRANTS | |
|-----------------------|------------------------|
| A | LPS 1® |
| B | LPS 2® |
| C | LPS® TKX® |
| D | LPS® KB-88 |
| E | All Purpose Anti-Seize |


| SPECIALTY MRO: | |
|----------------|--------------------|
| A | Anti-Spatter |
| B | Strong Steel Stick |
| C | Leak Detector |

| MARKING PRODUCTS | |
|------------------|---------------------------|
| A | DYKEM® BRITE-MARK® MEDIUM |
| B | DYKEM® BRITE-MARK® FINE |
| C | DYKEM® SUDZ-OFF® |
| D | DYKEM® HIGH PURITY |
| E | DYKEM® HIGH TEMP |

| DEGREASERS/CLEANERS | |
|---------------------|--|
| SOLVENT-BASED | |
| A | LPS® PreSolve® |
| B | LPS® ZeroTri® |
| C | LPS® A-151 |
| D | LPS® EVR™ |
| WATER-BASED | |
| E | Spray Nine™ Multi-Purpose Cleaner & Disinfectant |
| F | Spray Nine™ Grez-Off® HD Degreaser |
| G | LPS® Precision Clean |
| H | LPS® T-91™ |

| FLOOD COOLANTS | |
|---------------------------|------------------------------|
| MACHINING / SAWING FLUIDS | |
| A | RUSTLICK™ WS-5050 |
| B | RUSTLICK™ ULTRACUT® Pro |
| C | RUSTLICK™ ULTRACUT® 380R |
| D | RUSTLICK™ Vytron-N |
| E | RUSTLICK™ PowerSaw |
| F | RUSTLICK™ SS-405L |
| GRINDING FLUIDS | |
| G | RUSTLICK™ G-25J |
| H | RUSTLICK™ G-1066D |
| I | RUSTLICK™ Carbide PowerGrind |

*Spray Nine® Brand products are not for sale in Canada through ITW Pro Brands

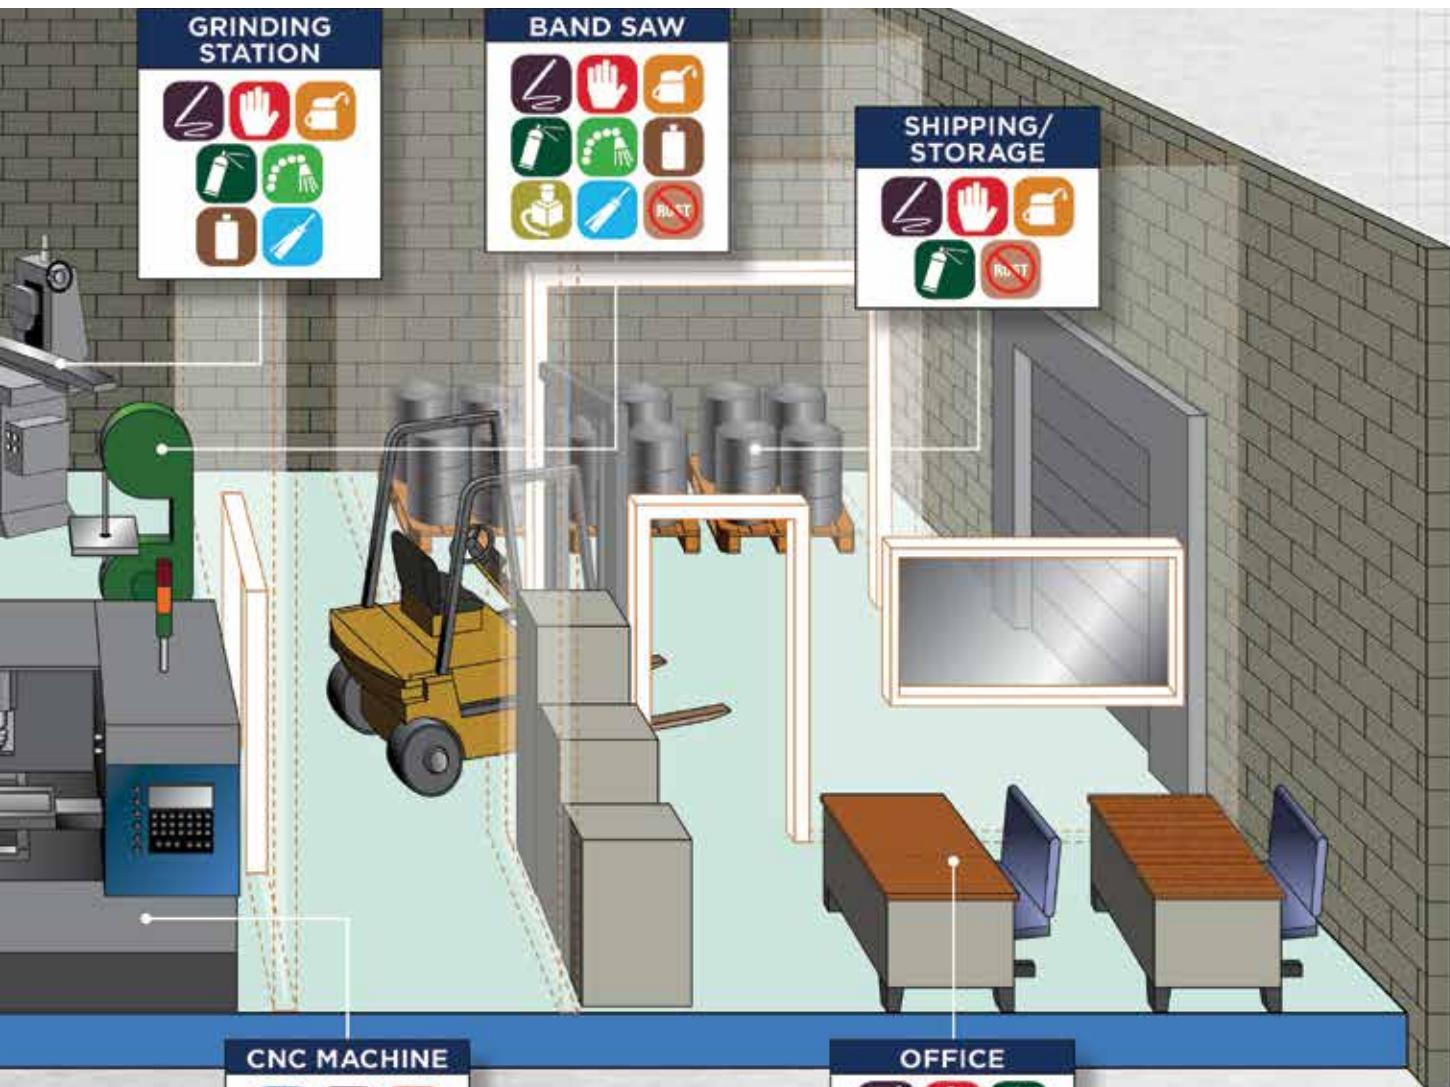

CNC MACHINE



OFFICE



HAND APPLIED CUTTING FLUIDS

LIQUID

| | | |
|---|----------------------------|-------------------------------------|
| A | LPS® Tapmatic #1 Gold | <input checked="" type="checkbox"/> |
| B | LPS® Tapmatic AquaCut | |
| C | LPS® Tapmatic Natural | |
| D | LPS® Tapmatic TriCut® | |
| E | Accu-Lube® Pump Spray Lube | |

SEMI-SOLID

| | | |
|---|----------------------------|-------------------------------------|
| F | LPS® Edge Crème | <input checked="" type="checkbox"/> |
| G | Accu-Lube® #10 Perfect Tap | |
| H | Accu-Lube® Gel Paste | |
| I | Accu-Lube® LS-10 Paste | |

SOLID

| | | |
|---|-----------------------|-------------------------------------|
| J | Accu-Lube® Stick Lube | <input checked="" type="checkbox"/> |
| K | Accu-Lube® Block Lube | |
| L | LPS® Edge Lube | |



MINIMUM QUANTITY LUBRICATION (MQL)

APPLICATORS

| | | |
|---|--------------------------------------|-------------------------------------|
| A | Accu-Lube® Junior Applicator | <input checked="" type="checkbox"/> |
| B | Accu-Lube® Standard Boxed Applicator | |

LUBRICANTS

| | | |
|---|--------------------|-------------------------------------|
| C | Accu-Lube® LB-2000 | <input checked="" type="checkbox"/> |
| D | Accu-Lube® LB-3000 | |
| E | Accu-Lube® LB-6000 | |



RUST PREVENTATIVES/ CORROSION INHIBITORS

APPLICATORS

| | | |
|---|---------------------|-------------------------------------|
| A | LPS 3® | <input checked="" type="checkbox"/> |
| B | LPS® Cold Galvanize | |
| C | RUSTLICK™ B | |
| D | RUSTLICK™ 631 | |
| E | RUSTLICK™ 606 | |



GREASES

| | | |
|---|--------------------------------|-------------------------------------|
| A | LPS® ThermaPlex® Multi-Purpose | <input checked="" type="checkbox"/> |
| B | LPS® ThermaPlex® CS Moly | |
| C | LPS® Red & Redi | |

Recommended product for most common applications

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS | SERVICES | SOLUTIONS

**LPS 1® GREASELESS LUBRICANT**

Penetrates quickly, displaces moisture, and will not attract dust or dirt



- Provides a dry, thin, lubricating film.
- Resists oil, dust, and dirt build-up.
- Ideal for delicate mechanisms.
- Removes carbon build-up from surfaces.
- Displaces moisture.
- Safe on paint, fabric, and most plastics.
- Used world-wide in aviation.
- Loosens rusted or frozen parts.
- VOC compliant in all 50 states.



SCAN TO LEARN MORE
ABOUT LPS 1® - THE SWISS ARMY KNIFE
OF LUBRICANTS

**LPS 2® HEAVY-DUTY LUBRICANT**

The strong, oily film multi-purpose lubricant, and penetrant with added corrosion protection



- Strong, multi-purpose lubricant and penetrant with added corrosion protection.
- Provides a non-drying, light, oily film.
- Reduces wear caused by friction and corrosion.
- Loosens rusted or frozen parts.
- Provides superior corrosion protection of metal parts during shipment.
- Protects metal parts during indoor storage up to one year.
- Does not contain silicone.
- Displaces moisture.
- Safe to use on most plastics, rubbers and paint.

**LPS 3® PREMIER RUST INHIBITOR**

The long-term, waxy film, premier rust inhibitor; protects even in the harshest environment



- Protects for up to 2 years indoors.
- Prevents rust and corrosion.
- Safe on all metals.
- Safe to use on rubber, fabric, plastics, and paints.
- Inhibits exfoliation and filiform corrosion of aluminum.
- Safe on all metals.
- Penetrates to displace moisture.

APPLICATIONS:

| | |
|-----------------------|--------------------|
| Cables | Molds |
| Circuit Breakers | Nuts & Bolts |
| Electronic Connectors | Power Tools |
| Electric Motors | Relays |
| Hinges | Sliding Mechanisms |
| Ignition Systems | Switch Gears |
| Locks | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 11 OZ. AEROSOL | 00116 | 17740 | \$16.07 |
| 5 GALLON PAIL | 00105 | 601136† | \$271.13 |
| 55 GALLON DRUM | 00155 | 19939† | \$2,876.33 |

†Non-Stock Item.

APPLICATIONS:

| | |
|---------------------------|--------------------------|
| Bearings & Valves | Metal Parts In Storage |
| Cables & Linkages | Productions Equipment |
| Dies, Bits & Fasteners | Pulleys & Rollers |
| Engines & Electric Motors | Transportation Equipment |
| Hand Tools | Slides & Tracks |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 11 OZ. AEROSOL | 00216 | 23321 | \$15.90 |
| 1 GALLON | 02128 | 18249† | \$66.47 |
| 5 GALLON PAIL | 00205 | 22714† | \$294.59 |
| 55 GALLON DRUM | 00255 | 25444† | \$2,824.18 |

†Non-Stock Item.

APPLICATIONS:

| | |
|--------------------------|------------------------------------|
| Aircraft Fuselages | Interior Sections Of Vehicle Doors |
| Battery Terminals | Metal Parts |
| Cables, Chains & Pulleys | Pumps & Hose Assemblies |
| Cargo Sections | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 11 OZ. AEROSOL | 00316 | 28787 | \$20.64 |
| 1 GALLON | 03128 | 75581† | \$102.24 |
| 5 GALLON PAIL | 00305 | 28207† | \$427.27 |
| 55 GALLON DRUM | 00355 | 30885† | \$3,831.76 |

†Non-Stock Item.

LPS® PRESOLVE® ORANGE DEGREASER

The orange degreaser that solves the toughest cleaning problems



APPLICATIONS:

| | |
|----------------------------|-------------------|
| Air Compressors | Fork Lifts |
| Alternators | Gears |
| Bearings | Heavy Equipment |
| Chains & Cable Connections | Power & Air Tools |
| Cranes | Printing Presses |
| Engines | Pulleys |

- High performance industrial degreaser that works on contact.
- Ideal for removing grease, tars, and oils.
- Fast acting, deep penetration.
- Controlled evaporation.
- Flash point above 100°F (38°C).
- Low residue.
- Safe on all metals and most plastics.



| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------------|-------------------|
| 11 OZ. AEROSOL | 01420 | 92151 | \$18.95 |
| 1 GALLON | 01428 | 92618† | \$121.61 |
| 5 GALLON PAIL | 01405 | 91253† | \$538.81 |
| 55 GALLON DRUM | 01455 | 94229† | \$5,338.30 |

†Non-Stock Item.

SCAN TO LEARN MORE
ABOUT PRESOLVE® ORANGE DEGREASER
 A&M
INDUSTRIAL INSIGHTS



LPS® MAGNUM PREMIUM LUBRICANT WITH PTFE

The high performance lubricant specially formulated with PTFE for maximum friction reduction

APPLICATIONS:

| | |
|---------------------------|-----------------------------|
| Bearings & Valves | Metal Parts & Hand Tools |
| Cables & Linkages | Parts in Storage |
| Dies, Bits & Fasteners | Production & Transportation |
| Engines & Electric Motors | Pulleys & Rollers |
| Hoists, Lifts & Draglines | Slides & Tracks |

- Does not contain silicone.
- Safe to use on most surfaces.
- Flash point of 175°F (79°C).
- Penetrates and protects metal against rust and corrosion.
- Ideal for both regular and extreme conditions.
- High performance lubricant with PTFE additives.
- Extends equipment life.
- Nonfood Compounds Program Listed Category Code: H2 Registration #128980 (Aerosol); #128981 (Bulk).



†Non-Stock Item.


LPS® KB 88 THE ULTIMATE PENETRANT

Has extremely high solvency and special additives to enhance penetration and attack corrosion

APPLICATIONS:

| | |
|-----------------------|---------------------|
| Bearings | Frozen Nuts & Bolts |
| Chains | Hinges |
| Conveyors | Plumbing Fixtures |
| Corroded Fasteners | Screws |
| Equipment Disassembly | Shafts |
| Frozen Gears & Cogs | Pulleys |

- Formulated to attack and quickly release rusted and corroded nuts, bolts, hinges, and other frozen components.
- High KB solvency value of 151 and low surface tension.
- Penetrates faster and deeper than most other similar products in the market place.
- Displaces moisture.
- Aggressive formula.
- VOC compliant in all 50 states.

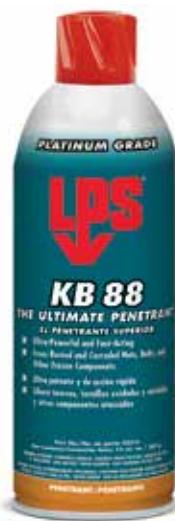

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------------|-------|----------------|----------------|
| 13 OZ. AEROSOL | 02316 | 3904864 | \$16.86 |
| 20 OZ. TRIGGER SPRAY | 02322 | 4606631 | \$22.89 |

EXCLUSIVE
 WEB DEALS

SCAN TO SHOP LPS
ONLINE-ONLY PROMOTIONS



Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS • SERVICES • SOLUTIONS

**TKX® ALL-PURPOSE LUBRICANT**

Greaseless lubricant that protects against corrosion, displaces moisture, and loosens frozen parts



- Excellent multi-purpose lubricant.
- Loosens rusted or frozen parts.
- Displaces moisture.
- Protects against corrosion.
- Provides a non-drying, long lasting, oily film.
- High flash point of >160°F (71°C).
- Non-conductive.
- Does not contain chlorinated solvents or silicones.
- Aerosol case quantity: 12/case
- 1 Gallon case quantity: 4/case

APPLICATIONS:

| | |
|-----------------|------------------------------|
| Bearings | Metal Parts & Machinery |
| Cables & Chains | Nuts & Bolts |
| Castings | Pumps & Pulleys |
| Dies & Molds | Saw Blades |
| Forgings | Springs |
| Gears | Rollers & Sliding Mechanisms |
| Machined stock | Ways & Guides |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 11 OZ. AEROSOL | 02016 | 11435 | \$8.09 |
| 1 GALLON | 02028 | 12226† | \$60.52 |
| 5 GALLON PAIL | 02005 | 10771† | \$284.96 |
| 55 GALLON DRUM | 02055 | 13907† | \$2,838.96 |

†Non-Stock Item.

**HEAVY-DUTY SILICONE LUBRICANT**

Silicone-rich, water-based formula that protects rubber and plastic parts



- Water-based, silicone rich formula that lubricates and protects rubber, plastic and metal parts.
- Does not contain chlorinated solvents.
- Provides excellent lubricity.
- Ideal for surfaces like elastomers and plastics where petroleum based lubricants are unsuitable.
- Eliminates sticking, binding, squeaking.
- Forms a clear, dry film upon extended drying.
- Colorless and odorless.
- Case quantity: 12/case

APPLICATIONS:

| | |
|------------------------------|------------------|
| Cables | Rubber Bushings |
| Castors | Rubber Mountings |
| Moving Plastic Parts & Gears | Seals |
| O-Rings | Sprockets |
| Plastic Rollers | Valves |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 13 OZ. AEROSOL | 01516 | 97842 | \$15.89 |
| 5 GALLON PAIL | 01505 | 97153† | \$390.06 |

†Non-Stock Item.

**LPS MAX 1™ DRY LUBRICANT & WATER DISPLACER**

Greaseless, dry-to-the-touch lubricant that penetrates quickly and displaces moisture to get parts up and running



The greaseless, dry-to-the-touch lubricant that penetrates quickly and displaces moisture to get parts up and running at max efficiency. Specially formulated to combat build-up, it's even safe for delicate mechanisms. Removes carbon build-up from surfaces and is safe on paint, fabric, and most plastics.

- Advanced greaseless formula keeps precision parts moving.
- Nozzle provides targeted or broad stroke application.
- Embossed can for improved hand grip.
- Locking flip straw actuator.
- Case quantity: 12/case

APPLICATIONS:

| | |
|--------------------------------|--------------------|
| Cables | Molds |
| Circuit Breakers | Nuts & Bolts |
| Electronic Connectors & Motors | Power Tools |
| Hinges | Relays |
| Ignition Systems | Sliding Mechanisms |
| Locks | Switch Gears |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 16 OZ. AEROSOL | 90116 | 5131387 | \$16.07 |



LPS MAX 2™ LUBRICANT, PENETRANT & PROTECTANT

Non-drying film displaces moisture and provides lubrication and corrosion protection



This multi-purpose lubricant penetrates quickly to displace moisture; leaving behind a light, non-drying film that provides ongoing lubrication and added corrosion protection for up to 1 year on indoor, metal parts. The non-conductive formula reduces wear from friction and corrosion.

APPLICATIONS:

| | |
|---------------------------|-----------------------------|
| Bearings & Valves | Metal Parts In Storage |
| Cables & Linkages | Production & Transportation |
| Dies, Bits & Fasteners | Equipment |
| Engines & Electric Motors | Pulleys & Rollers |
| Hand Tools | Slides & Tracks |

- Superior penetration and up to 1 year indoor parts protection.
- Leaves a light non-drying film that reduces wear from friction and corrosion.
- Quickly penetrates to loosen rusted or frozen parts.
- Nozzle provides targeted or broad stroke application.
- Embossed can for improved hand grip.
- Locking flip straw actuator.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 16 OZ. AEROSOL | 90216 | 5131388 | \$15.90 |

LPS® MAX KB 88 MAXIMUM PENETRANT



LPS® MAX KB 88 is the heavy-duty penetrant that outperforms others in the market. The aggressive formula features an extremely high KB solvency (151) and low surface tension for maximum penetration to attack corrosion at its core. Attacks and penetrates corrosion that binds fasteners for a faster release saving time. Displaces moisture, drying out fasteners and allowing for a smoother release with less mess.

APPLICATIONS:

| | |
|---------------------------|----------------------------------|
| Bearings | Frozen Cogs, Gears, Nuts & Bolts |
| Chains | Hinges |
| Conveyors & Pulleys | Plumbing Fixtures |
| Corroded Fasteners | Relays |
| Engines & Electric Motors | Screws |
| Equipment Disassembly | Shafts |

- Heavy duty formulation bites through corrosion to free frozen parts quickly.
- Displaces moisture.
- Kb solvency value of 151.
- Advanced penetration formula frees frozen parts faster.
- Nozzle provides targeted or broad stroke application.
- Embossed can for improved hand grip.
- Locking flip straw actuator.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 16 OZ. AEROSOL | 92316 | 5131389 | \$16.53 |

LPS® MAX PRESOLVE® INDUSTRIAL ORANGE DEGREASER



Grease, grime, and oil are no match for this industrial-strength, orange degreaser. The formula works on contact to quickly dissolve and remove grime. Safe on all metals and most plastics, this product features controlled evaporation and leaves little residue behind.

APPLICATIONS:

| | |
|----------------------------|-------------------|
| Air Compressors | Forklifts |
| Alternators | Gears |
| Bearings | Heavy Equipment |
| Chains & Cable Connections | Power & Air Tools |
| Cranes | Printing Presses |
| Engines | Pulleys |

- Removes grime with MAX speed.
- Effectively dissolves tars, asphalt, mastics, and adhesive residues.
- Low residue.
- Fast acting, deep penetration.
- Safe on all metals and most plastics.
- No chlorinated solvents.
- Controlled evaporation.
- Nozzle provides targeted or broad stroke application.
- Embossed can for improved hand grip.
- Locking flip straw actuator.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 20 OZ. AEROSOL | 91420 | 5131393 | \$18.95 |

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400



PREVENTION WITH DETECTION

DID YOU KNOW: ALMOST 40,000,000 LBS OF FOOD IS RECALLED ANNUALLY DUE TO CONTAMINATION

LPS® DETEX® technology helps reduce the risk of foreign object contamination that can result in contaminated product, facility downtime, delayed customer deliveries, and compromised brand reputation. Utilizing a unique patented formula, LPS® DETEX® plastic components are both metal & X-ray detectable. Their bright blue color also helps provide added visibility within the plant.



LPS® DETEX® FOODLUBE® PENETRATING OIL

LPS® DETEX® FoodLube® Penetrating Oil is a fully synthetic, fast acting, penetrant that can be used anywhere within a food processing facility where incidental food contact may occur. The versatile formula attacks rust and scale to quickly release frozen parts while displacing water and leaving a protective film to prevent corrosion.



- NSF H1 penetrant can be used anywhere within a facility where incidental food contact may occur
- Penetrates rust, scale, grease, dirt, and grime to quickly release frozen parts, reducing downtime associated with equipment disassembly.
- Fully synthetic formula displaces water to prevent corrosive attack.
- Leaves a protective film to prevent corrosion short-term.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case



SCAN TO LEARN MORE
ABOUT DETEX® FOOD SAFE TECHNOLOGY



APPLICATIONS:

| | |
|-------------------|--------------------|
| Castors | Food Racks |
| Chains | Food Service Carts |
| Conveyors | Slicers |
| Filling Equipment | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 11 OZ. AEROSOL | 57316 | 4806097 | \$12.92 |



LPS® DETEX® FOOD GRADE CHAIN LUBRICANT

Provides effective lubrication of chains and conveyors operating in food processing environments

LPS® DETEX® Food Grade Chain Lubricant's foaming action penetrates deep into chains, bushings, and pins to extend chain life. The wet-film formula resists sling-off and water washout, remaining on intended surfaces, reducing product waste and messy cleanup.



- NNSF H1 lubricant can be used anywhere within a facility where incidental food contact may occur.
- Anti-stick agent for chutes and slides keeps packages moving.
- Dry film will not attract dust or dirt.
- Safe on all metals, plastics, and rubber parts.
- Colorless formula will not stain packaging material or equipment.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case

APPLICATIONS:

| | |
|-------------------|--------------------|
| Chains | Food Racks |
| Channels | Food Service Carts |
| Conveyors | Gears |
| Filling Equipment | Open Drives |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 12 OZ. AEROSOL | 06016 | 3003916 | \$17.49 |



800.864.2660

| WWW.AM-IND.COM



LPS® DETEX® FOOD GRADE SILICONE LUBRICANT

Keeps packages moving down chutes and slides in food processing facilities where incidental food contact may occur.

- NSF H1 lubricant can be used anywhere within a facility where incidental food contact may occur.
- Anti-stick agent for chutes & slides.
- Dry film will not attract dust or dirt.
- Safe on all metals, plastics, and rubber parts.
- Colorless formula will not stain.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case



APPLICATIONS:

| | |
|-------------------------|------------------|
| Castors | Pins |
| Chutes & Conveyors | Rings |
| Food Racks | Rubber Mountings |
| Guards & Guide Rails | Seals |
| Plastic Gears & Rollers | Slides |


| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 10 OZ. AEROSOL | 01716 | 277111 | \$10.23 |



LPS® DETEX® BELT DRESSING

Eliminates slippage and squeaks on all belt types and extends belt life, keeping critical drive systems operational.

- NSF H1 lubricant can be used anywhere within a facility where incidental food contact may occur.
- Prevents belt slippage and squeaks on all belt types.
- Withstands frequent wash downs, extending maintenance cycles and reducing downtime.
- Contains no chlorinated solvents that deteriorate drive belts.
- May be used indoors or in wet/outdoor conditions.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case

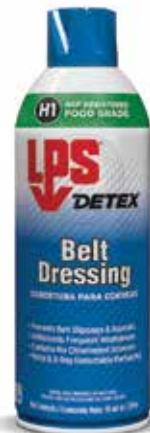

APPLICATIONS:

| | |
|-----------------------|-----------------|
| Appliance Drive Belts | Polishing Belts |
| Bushings | Round Belts |
| Flat Belts | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-------|----------------|
| 10 OZ. AEROSOL | 02216 | 23152 | \$11.99 |



LPS® DETEX® FOOD GRADE MACHINE OIL

A versatile, multi-purpose lubricant, Food Grade Machine Oil is NSF H1 approved for use in food processing facilities where incidental food contact may occur. It penetrates quickly to loosen frozen nuts and bolts while eliminating sticking, binding, and squeaking in metal parts. The colorless formula will not stain products or equipment.

APPLICATIONS:

| | |
|-----------|--------------------|
| Castors | Filling Equipment |
| Chains | Food Racks |
| Channels | Food Service Carts |
| Conveyors | Slicers |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|--------|----------------|
| 11 OZ. AEROSOL | 01316 | 421626 | \$11.45 |

- NSF H1 lubricant can be used anywhere within a facility where incidental food contact may occur.
- Eliminates sticking, binding, and squeaking.
- Oily film penetrates to loosen frozen nuts and bolts.
- Colorless formula will not stain product or equipment.
- Safe on all metal surfaces.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case



LPS® DETEX® FOOD GRADE ELECTRONIC CLEANER

APPLICATIONS:

| | |
|------------|-------------------|
| Breakers | Digital Equipment |
| Connectors | Office Equipment |
| Contacts | Printed Circuits |
| Controls | Switches |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|---------|----------------|
| 11 OZ. AEROSOL | 58116 | 4755704 | \$18.89 |

- NSF K6 electronic cleaner can be used anywhere within a facility where incidental food contact may occur.
- Removes dirt, moisture & oxides from electronic equipment.
- Plastic safe formula can be used on a variety of surfaces.
- Fast drying and residue-free for efficient maintenance cycles.
- VOC Compliant in all 50 states.
- Metal and X-ray detectable packaging.
- Halal Product Certified #HP-5543-CH.
- Kosher Certified.
- Case quantity: 12/case



Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS • SERVICES • SOLUTIONS



Rustlick

Accu-Lube

MACHINE TYPES

| MILL | BANDSAW | CNC MACHINE | SURFACE GRINDER | BELT & DISC GRINDER | DRILL PRESS | LATHE | | | | |
|-------|---------|-------------|-----------------|---------------------|-------------|-------------|-----------------|---------------------|-------------|-------|
| | | | | | | | | | | |
| BRAND | PRODUCT | FEATURE | | MILL | BAND-SAW | CNC MACHINE | SURFACE GRINDER | BELT & DISC GRINDER | DRILL PRESS | LATHE |



FLOOD COOLANTS

MACHINING / SAWING FLUIDS

| | | | | | | | | | | |
|-----------|----------------|---|---|---|---|---|---|--|---|---|
| RUSTLICK™ | WS-5050 | ✓ | General purpose heavy-duty water-soluble oil | • | • | • | • | | • | • |
| | ULTRACUT® Pro | | Heavy-duty, high-biostability water-soluble oil with EP additives | • | • | • | • | | • | • |
| | ULTRACUT® 380R | | Heavy-duty, ultra long-lasting bioreistant semi-synthetic coolant with non-chlorinated EP additives | • | • | • | • | | • | • |
| | Vytron-N | | General-purpose synthetic cutting fluid | • | • | • | • | | • | • |
| | PowerSaw | | Moderate to heavy-duty synthetic cutting fluid with non-chlorinated EP additives | • | • | | | | | |
| | SS-405L | | Moderate-duty semi-synthetic fluid | • | • | • | • | | • | • |

GRINDING FLUIDS

| | | | | | | | | | | |
|-----------|--------------------|---|--|--|--|--|---|--|--|--|
| RUSTLICK™ | G-25J | ✓ | Synthetic grinding fluid for blanchard, surface, centerless & cylindrical grinding | | | | • | | | |
| | G-1066D | | Synthetic grinding fluid for diamond wheel grinding | | | | • | | | |
| | Carbide PowerGrind | | Premium synthetic grinding fluid for carbide grinding | | | | • | | | |



HAND APPLIED CUTTING FLUIDS

LIQUIDS

| | | | | | | | | | | |
|------|-------------------|---|---|---|---|--|--|--|---|--|
| LPS® | Tapmatic® #1 Gold | ✓ | Great for all metals including aluminum | • | • | | | | • | |
| | Tapmatic® AquaCut | | Water-based cutting fluid that does not contain sulfur, chlorine, or chlorinated solvents | • | • | | | | • | |
| | Tapmatic® Natural | | High-performance, biodegradable, naturally organic cutting fluid | • | • | | | | • | |
| | Tapmatic® TriCut® | | Designed to effectively lubricate severe metalworking operations | • | • | | | | • | |

ACCU-LUBE® Pump Spray Lube

LB-2000 Pump Spray

SEMI-SOLIDS

| | | | | | | | | | | |
|------|----------------------|---|---|---|---|--|--|--|---|--|
| LPS® | Tapmatic® Edge Creme | ✓ | Biodegradable cream formula cutting lubricant | • | • | | | | • | |
| | #10 Perfect Tap | | Thickest natural based cutting oil | • | | | | | • | |
| | Gel Paste | | Natural-based gel lubricant | • | | | | | • | |

ACCU-LUBE® Gel Paste

LS-10 Paste

SOLIDS

| | | | | | | | | | | |
|------------|------------|---|------------------------------------|--|---|--|--|---|--|--|
| ACCU-LUBE® | Stick Lube | ✓ | Soft-solid lubricant in stick form | | • | | | • | | |
| | Block Lube | | Soft-solid lubricant in block form | | • | | | • | | |

LPS® Tapmatic® Edge Lube

Biodegradable solid bar lubricant



MINIMUM QUANTITY LUBRICATION (MQL)

APPLICATORS

| | | | | | | | | | | |
|------------|----------------------------|---|-------------------------------|---|---|--|--|--|---|---|
| ACCU-LUBE® | Junior Applicator | ✓ | 1-or-2 Pump Junior Applicator | • | • | | | | • | • |
| | Standard Boxed Applicator® | | 1-or-2 Pump Boxed Applicator | • | • | | | | • | • |

LUBRICANTS

| | | | | | | | | | | |
|------------|---------|---|--------------------------------------|---|---|--|--|--|---|---|
| ACCU-LUBE® | LB-2000 | ✓ | Moderate to heavy-duty MQL lubricant | • | • | | | | • | • |
| | LB-3000 | | Moderate-duty MQL lubricant | • | • | | | | • | • |
| | LB-6000 | | Moderate to heavy-duty MQL lubricant | • | • | | | | • | • |

Recommended product for most common applications

**TAPMATIC® #1 GOLD CUTTING FLUID**

Great for all metals, including aluminum

APPLICATIONS:

| | |
|-----------|-----------|
| Boring | Milling |
| Broaching | Reaming |
| Drilling | Threading |
| Engraving | Turning |
| Facing | Sawing |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-----------------------|-------|--------|----------------|
| 11 OZ. AEROSOL | 40312 | 25280† | \$18.47 |
| 16 OZ. SQUEEZE BOTTLE | 40320 | 25745 | \$16.30 |
| 1 GALLON | 40330 | 26332 | \$94.12 |
| 5 GALLON PAIL | 40340 | 26927† | \$379.66 |

†Non-Stock Item.

- Does not contain water, solvents, or inactive fillers.
- Reduces cutting torque and improves cutting efficiency.
- Does not contain chlorinated solvents or chlorinated paraffins.
- Requires less product usage than traditional cutting fluids.
- Increases tool life and improves surface finish.
- For all metals including aluminum.
- Excellent for tapping applications.

**LPS® TAPMATIC® DUAL ACTION PLUS #2 CUTTING FLUID**

A metal-cutting fluid safe for tapping, drilling, reaming, threading, or finishing on aluminum

APPLICATIONS:

| | |
|-----------|-----------|
| Boring | Milling |
| Broaching | Reaming |
| Drilling | Sawing |
| Engraving | Stamping |
| Facing | Tapping |
| Finishing | Threading |
| Grinding | Turning |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-------|----------------|
| 16 OZ. AEROSOL | 40220 | 20248 | \$15.49 |
| 1 GALLON | 40230 | 20837 | \$133.03 |

- Provides superior extreme pressure lubricity in machining aluminum and its alloys.
- Improves surface finish and extends tool life.
- Reduces friction and eliminates chip welding.
- No chlorinated solvents.

**LPS® EDGE LUBE CUTTING FLUID**

High-efficiency lubricant that extends grinding wheel, saw blades, and belt life by eliminating heat build-up and loading

The greaseless, dry-to-the-touch lubricant that penetrates quickly and displaces moisture to get parts up and running at max efficiency. Specially formulated to combat build-up, it's even safe for delicate mechanisms. Removes carbon build-up from surfaces and is safe on paint, fabric, and most plastics.

APPLICATIONS:

| | |
|-----------|-----------|
| Boring | Grinding |
| Broaching | Tapping |
| Drilling | Threading |
| Engraving | Turning |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------|-------|-------|----------------|
| 13 OZ. TUBE | 43200 | 76386 | \$24.24 |

- Low toxic, biodegradable, low odor.
- Extends grinding wheel life.
- Does not contain any hazardous chemicals.
- Eliminates heat build-up and belt loading.
- Excellent for belt, wheel or disc grinding, and sawing applications.
- Biodegradable, solid, white, waxy bar.
- Recognized by the USDA BioPreferred™ program.
- Water rinsable.
- Safe on all metals.



Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400



Accu-Lube**LB-1000 GENERAL PURPOSE MQL**

- Premium, heavy-duty minimum quantity lubricant with chlorinated extreme pressure additives.

APPLICATIONS:

Heavy-duty machining, sawing and cutting.
Difficult steel & hardened metal operations.
Large diameter tapping.
Deep hole drilling.
High heat operations.
Sawing large diameter solids.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|----------------|
| 1 GALLON JUG | LB1000 | 5161095 | \$121.83 |
| 55 GALLON DRUM | LB1055 | 6195867† | \$6,108.66 |

†Non-Stock Item.

Accu-Lube**LB-3000 MEDIUM TO HEAVY DUTY MACHINING FLUID**

- Economical, moderate-duty minimum quantity lubricant.

APPLICATIONS:

General machining and sawing.
Replacement for "mist" type lubricant and coolant.
Lumber & wood cutting applications.
Vegetable-based, biodegradable lubricant.
For ferrous & non-ferrous metals, aluminum and titanium.
Clean before heat treating with soap & water.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|----------------|
| 1 GALLON JUG | LB3000 | 5161084 | \$74.07 |
| 55 GALLON DRUM | LB3055 | 5161085† | \$3,459.35 |

†Non-Stock Item.

Accu-Lube**LB-5000 LIGHT VISCOSITY MQL**

- Superior, moderate-duty minimum quantity lubricant.
- Vegetable-based, biodegradable lubricant.
- Non-staining, burns off cleanly in post heat treating.

Accu-Lube**LB-2000 GENERAL PURPOSE MQL**

- Premium, heavy-duty minimum quantity lubricant with chlorinated extreme pressure additives

APPLICATIONS:

General machining, sawing and cutting.
General purpose near-dry machining.
Drilling & tapping small holes.
Sawing large diameter solids.
Large diameter tapping.
Broaching & spline rolling.
Moderate to heavy-duty applications.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|----------------|
| 1 GALLON JUG | LB2000 | 4594595 | \$107.92 |
| 55 GALLON DRUM | LB2055 | 5161083† | \$5,271.95 |

†Non-Stock Item.

Accu-Lube**LB-4600 LIGHT VISCOSITY MQL**

- Economical, light-duty minimum quantity lubricant.
- Vegetable-based, biodegradable lubricant.
- Non-staining, burns off cleanly in post heat treating.

APPLICATIONS:

Light-duty machining, sawing and cutting.
Aluminum extrusion machining and sawing.
For ferrous & non-ferrous metals, aluminum and titanium.
Aluminum extrusion machining and sawing.
Clean with soap and water.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|----------------|
| 1 GALLON JUG | LB4600 | 4660868 | \$85.24 |
| 55 GALLON DRUM | LB4655 | 6195869† | \$4,560.44 |

†Non-Stock Item.

Accu-Lube**LB-6000 LIGHT VISCOSITY MQL**

- Premium, moderate to heavy-duty minimum quantity lubricant.
- Vegetable-based, biodegradable lubricant.
- Non-staining, burns off cleanly in post heat treating.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|-------------------|
| 1 GALLON JUG | LB6000 | 5161097 | \$193.66 |
| 55 GALLON DRUM | LB6055 | 5524397† | \$9,409.70 |

†Non-Stock Item.

**APPLICATIONS:**

Aluminum machining, cutting and sawing. Moderate to heavy duty milling, drilling, tapping and punching. Aluminum applications post-heat treating. Clean with soap and water.

Accu-Lube**LB-6800 LIGHT VISCOSITY MQL**

- Moderate-duty minimum quantity lubricant.
- Vegetable-based, biodegradable.
- Non-staining, burns off cleanly in post heat treating.

**APPLICATIONS:**

General machining, sawing and cutting. Sawing aluminum castings. For ferrous & non-ferrous metals, aluminum and titanium. Clean with soap and water

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|--------|-----------------|-------------------|
| 1 GALLON JUG | LB6800 | 5161086 | \$171.03 |
| 55 GALLON DRUM | LB6855 | 5161087† | \$9,087.30 |

†Non-Stock Item.

**Accu-Lube****LB-8500 LUBRICANT**

For Cutting & Machining Aluminum

- Light to moderate duty minimum quantity lubricant.
- Burns off clean after post-heat treating (aging).

APPLICATIONS:

Sawing and machining aluminum. Aluminum extruders. General machining for all metals. Sawing and machining of aluminum, due to superior lubricity. A general use product for all metals and all types of machining.

Accu-Lube**POWER STAMP II LIGHT VISCOSITY MQL**

- Superior, heavy-duty minimum quantity lubricant with non-chlorinated extreme pressure and anti-wear additives.
- Vegetable-based, biodegradable lubricant.
- Non-staining, burns off cleanly in post heat treating.

**APPLICATIONS:**

Operations that generate a lot of heat. Stamping & carbide die stamping. Machining aluminum and titanium. For ferrous & non-ferrous metals, aluminum and titanium.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|----------|-----------------|--------------------|
| 1 GALLON JUG | LBSTII01 | 4640403 | \$200.19 |
| 55 GALLON DRUM | LBSTII55 | 5524400† | \$10,562.26 |

†Non-Stock Item.

**Accu-Lube****POWER STAMP III GENERAL PURPOSE MQL**

- Superior, heavy-duty minimum quantity lubricant with non-chlorinated anti-wear and extreme pressure additives.
- Vegetable-based, biodegradable lubricant.
- Water-washable.

APPLICATIONS:

Carbide die stamping. Drawing and fine blanking. Stamping sheet metal up to 0.125" thick (gauge 8 and higher, depending on the type of metal). For ferrous & non-ferrous metals, aluminum and titanium. Clean before heat treating with rinse water.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-----------|-----------------|-------------------|
| 1 GALLON JUG | LBSTIII01 | 6195880 | \$81.19 |
| 55 GALLON DRUM | LBSTIII55 | 6195881† | \$3,845.06 |

†Non-Stock Item.

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS • SERVICES • SOLUTIONS

Accu-Lube® GEL PASTE

Natural-based gel lubricant works for a wide variety of cutting applications. The workable texture makes it easy to apply to small and large tools with a soft brush without risk of damaging the tool. Safe, non-toxic, non-allergenic, and biodegradable. Ideal for short-run machining operations and for sawing, drilling, tapping, etc. operations in the shop and out in the field. Suitable for all types of materials, including aluminum, ferrous & non-ferrous metals, and titanium.



- Vegetable-based gel lubricant clings better to parts and tooling.
- Workable texture makes it easy to apply to small and large tools.

APPLICATIONS:

Short-run machining.
Tapping.
Drilling.
Reaming.
Horizontal applications.
For ferrous & non-ferrous metals, aluminum and titanium.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|---------------|-------|-----------------|-----------------|
| 8 OZ. BOTTLE | 79030 | 6195861 | \$16.10 |
| 5 GALLON PAIL | 79035 | 6195862t | \$959.33 |

^tNon-Stock Item.

Accu-Lube® PUMP SPRAY LUBE

Accu-Lube® Pump Spray Lubricant puts industry leading LB-2000 MQL lubricant in a conveniently sized spray bottle. Safe, non-toxic, non-allergenic, and biodegradable. Pump Spray Lube is ideal for short-run machining operations.



- Vegetable-based, biodegradable liquid lubricant.
- Cleans up easily before heat treat with soap and water.

APPLICATIONS:

Moderate to heavy-duty sawing and cutting operations.
For ferrous & non-ferrous metals, aluminum and titanium.
Short-run processes.
Drilling.
Tapping.
Milling.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------------------|-------|----------------|----------------|
| 8 OZ. PUMP SPRAY BOTTLE | 79026 | 5161081 | \$10.69 |

Accu-Lube® LS-10 PASTE

For application on any cutting tool: apply with brush or immerse tool in paste. When exposed to heat or friction, Accu-Lube® LS-10 Paste spreads over tool surface to provide excellent lubricating coverage.



SCAN TO LEARN MORE
DOWNLOAD YOUR FREE ACCU-LUBE CATALOG



- Solid paste lubricant.
- Reduces friction for cleaner cutting and better finish.
- Vegetable-based lubricant.
- Clean with soap and water.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------|-------|----------------|----------------|
| 8 OZ. JAR | 7603 | 2440638 | \$17.13 |

APPLICATIONS:

Short-run machining.
Tapping.
Drilling.
Reaming.
Horizontal applications.
For ferrous & non-ferrous metals, aluminum and titanium.

Accu-Lube® STICK LUBE

Accu-Lube solid stick lubricant is a high-viscosity version of their industry-leading vegetable-based MQL lubricants in a convenient smaller container that can be carried in a toolbox or out into the field for use in maintaining machinery.



- Vegetable-based, biodegradable lubricant.
- Safe, non-toxic formula.
- Cleans with soap and water.

APPLICATIONS:

Short-run machining.
General machining, sawing, drilling, tapping, milling operations, etc.
Rotating or stationary cutting tools.
Belt, disc and wheel grinding.
Ferrous & non-ferrous metals, aluminum and titanium.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-----------------------|-------|----------------|----------------|
| 2.2 OZ. PUSH-UP STICK | 79042 | 2403854 | \$7.64 |
| 13 OZ. STICK | 79045 | 5161094 | \$21.83 |

Rustlick™ WS-5050 WATER-SOLUBLE OIL



Water-soluble oil with chlorinated extreme pressure additives for moderate and heavy-duty machining applications.

APPLICATIONS:

Broaching, drilling, general machining, CNC machining, and milling applications.
Moderate & heavy-duty machining.
For use on ferrous metals, brass, bronze, copper, and aluminum.
Not recommended for titanium.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 1 GALLON | 74016 | 4557852 | \$66.35 |
| 5 GALLON PAIL | 74056 | 407455 | \$265.15 |
| 55 GALLON DRUM | 74556 | 5389901† | \$2,770.27 |

†Non-Stock Item.

- Chlorinated EP additives.
- Great lubricity.
- Provides great surface finish.
- Thin oily-film corrosion protection.
- Increases tool life.
- 1 Gallon case quantity: 4/case



Rustlick™ WS-11 WATER-SOLUBLE OIL

PROPERTIES:

| | |
|-------------------------|--|
| Appearance: | Dark brown |
| Class: | Water-Soluble Oil |
| pH Value: | 9 |
| Specific Gravity: | 0.92 |
| Density: | 7.7 lbs/gal |
| Flash Point: | 320°F (160°C) |
| Total Chlorine: | None |
| Mineral Oil: | 85.00% |
| Water Solubility: | Soluble |
| Dilution Ratio: | General Machining and Grinding: 10:1-30:1 10:1 = 10.5, 20:1 = 5.3, 30:1 = 3.5 |
| Refractometer Readings: | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 1 GALLON | 74013 | 5389895 | \$51.47 |
| 5 GALLON PAIL | 74053 | 4738243† | \$205.70 |
| 55 GALLON DRUM | 74553 | 5389900† | \$2,149.17 |

†Non-Stock Item.

Economical water-soluble oil for light-duty use.

- Great lubricity.
- Thin oily-film corrosion protection.
- Increases tool life.



APPLICATIONS:

Light-duty operations and general machining and grinding.
For use on ferrous metals & aluminum.
Limited use on stainless steel, titanium, brass, bronze, and copper.

Rustlick™ ULTRACUT® PRO WATER-SOLUBLE OIL

PROPERTIES:

| | |
|-------------------------|---|
| Appearance: | Golden yellow to light brown |
| pH Value: | 10 |
| Specific Gravity: | 0.98 |
| Density: | 8.2 lbs/gal |
| Flash Point: | > 200°F (93°C) |
| Total Chlorine: | 4.70% |
| Mineral Oil: | 53.50% |
| Dilution Ratio: | Light-Duty Machining: 30:1 (3%) Moderate-Duty Machining: 20:1 (5%) Heavy-Duty Machining: 10:1 (10%) 10:1=9.2, 20:1=4.6, 30:1=3.1 |
| Refractometer Readings: | |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 5 GALLON PAIL | 84405 | 5366044† | \$294.51 |
| 55 GALLON DRUM | 84455 | 5389929† | \$3,077.19 |

†Non-Stock Item.

Ultracut PRO® Water-Soluble Oil is a premium water-soluble oil cutting & grinding fluid with maximum bio-resistance and chlorinated extreme-pressure additives for heavy-duty machining.

- Increases sump life, extends tool life and provides corrosion protection.
- Excellent lubricity provides great workpiece quality.



APPLICATIONS:

Heavy-duty machining and grinding.
Ferrous and non-ferrous metals.
Aluminum, brass, bronze, and copper.
Not recommended for titanium.

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400



Rustlick™ WS-500A WATER-SOLUBLE OIL FOR CUTTING & GRINDING

Designed with a proprietary extreme pressure (EP) additive, Rustlick™ WS-500A is excellent for machining titanium, Inconel X, Aluminum, Rene 41, stainless steel, and other metals. Rustlick™ WS-500A cutting and grinding fluid is compatible with CNC machining and does not contain chlorine or sulfur, thereby reducing disposal costs.



- Water-soluble oil.
- Non-Chlorinated EP additives.
- General purpose coolant.
- Thin oily-film corrosion protection.
- Increases tool life.

PROPERTIES:

| | |
|-------------------------|--|
| Appearance: | Dark brown |
| Class: | Water-soluble oil |
| pH Value: | 9.2 |
| Specific Gravity: | 0.93 |
| Density: | 7.8 lbs/gal |
| Flash Point: | 320°F (160°C) |
| Total Chlorine: | None |
| Mineral Oil: | 74% |
| Water Solubility: | Soluble |
| Dilution Ratio: | Milling, Drilling, Boring, Turning, Threading, Broaching: 10:1-20:1 Form Grinding: 10:1-15:1 Centerless Grinding: 25:1-30:1 10:1=11, 20:1=5.6, 30:1=3.1 |
| Refractometer Readings: | |

APPLICATIONS:

Light to moderate-duty operations.

General machining.

For use on ferrous metals, aluminum, and titanium.

Limited use for brass, bronze, and copper.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 5 GALLON PAIL | 74055 | 4768016t | \$269.34 |
| 55 GALLON DRUM | 74555 | 5608305t | \$2,814.44 |

tNon-Stock Item.

Rustlick™ ULTRACUT® PRO-CF WATER-SOLUBLE OIL

ULTRACUT® PRO-CF is a premium chlorine-free, water-soluble oil, cutting, and grinding fluid with maximum bio-resistance and non-chlorinated extreme-pressure additives for heavy-duty machining.



- Premium water-soluble oil
- Biostable and resistant to microorganisms.
- Non-chlorinated EP additives.
- Increases sump life.
- Extends tool life.
- Provides corrosion protection.
- Provides great workpiece quality.

PROPERTIES:

| | |
|-------------------------|---|
| Appearance: | Liquid |
| Color: | Golden Yellow; Light brown |
| Odor: | Mild, characteristic |
| pH Value: | 9.7 @ 10% |
| Boiling Point / Range: | > 212°F (> 100°C) |
| Flash Point: | > 199.4°F (> 93°C) Pensky-Martens Closed Cup |
| Water Solubility: | Emulsifies |
| Specific Gravity: | 0.96 |
| Total Chlorine: | 0% |
| Mineral Oil: | 50% |
| Dilution Ratio: | Light-Duty Machining: 30:1 (3%) Moderate-Duty Machining: 20:1 (5%) Heavy-Duty Machining: 10:1 (10%) 10:1=9.2, 20:1=4.6, 30:1=3.1 |
| Refractometer Readings: | |

APPLICATIONS:

For use on ferrous and non-ferrous metals including aluminum, titanium, brass, bronze, and copper.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 5 GALLON PAIL | 83305 | 4624782 | \$290.54 |
| 55 GALLON DRUM | 83355 | 5389928t | \$3,035.82 |

tNon-Stock Item.



SCAN TO SHOP RUSTLICK™
ONLINE-ONLY PROMOTIONS




RustlickTM ULTRACUT[®] 380R

Ultracut[®] 380R is a premium heavy-duty, biostable, semi-synthetic metalworking fluid with non-chlorinated extreme-pressure additives.



SCAN TO
LEARN MORE
DOWNLOAD YOUR
FREE RUSTLICK PRODUCT
SELECTION GUIDE



PROPERTIES:

| | |
|-------------------------|---|
| Appearance: | Translucent blue |
| Class: | Semi-synthetic |
| pH Value: | 9.9 |
| Specific Gravity: | 0.99 |
| Density: | 8.3 lbs/gal |
| Flash Point: | > 200°F (93°C) |
| Total Chlorine: | None |
| Mineral Oil: | 25% |
| Water Solubility: | 25% |
| Dilution Ratio: | Light Duty 30:1 (3%), Moderate 20:1 (5%), Heavy Duty 10:1 (10%) |
| Refractometer Readings: | 10:1 = 6.0, 20:1 = 3.0, 30:1 = 2.0 |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 5 GALLON PAIL | 76005 | 5389910† | \$260.39 |
| 55 GALLON DRUM | 76055 | 4660338† | \$2,720.62 |

†Non-Stock Item.

- Non-chlorinated EP additives.
- Biostable and resistant to microorganisms.
- Provides hard water stability.
- Increases coolant life.
- Keeps machines clean.
- Great corrosion protection.
- Dramatically extends tool life.
- Enhances workpiece quality and surface finish.



APPLICATIONS:

Heavy to moderate-duty machining and grinding.
High volume/high pressure coolant systems.
Use on all ferrous and non-ferrous metals including aluminum, titanium, stainless steel, brass, bronze and copper.

RustlickTM G-25J SYNTHETIC GRINDING FLUID

G-25J Synthetic Grinding Fluid is a superior general-purpose synthetic metalworking fluid formulated specifically for surface grinding, especially Blanchard grinding. Transparent solution provides rapid fines settling and good visibility while keeping wheels clean and offering dry-film corrosion protection for work pieces and machines.

PROPERTIES:

| | |
|---------------------------|---|
| Appearance: | Liquid |
| Color: | Dark green |
| Odor: | Mild |
| pH Value: | 9.8 @ 10% |
| Melting / Freezing Point: | Not available |
| Boiling Point / Range: | > 212 °F (> 100 °C) |
| Flash Point: | > 199.4 °F (> 93.0 °C) |
| Vapor Density: | > 1 |
| Water Solubility: | Soluble |
| Specific Gravity: | 1.08 |
| Active sulfur content: | None |
| Total chlorine: | None |
| Density: | 9.0 lbs/gal (1077 kg/m ³) |
| Dilution Ratio: | Cast iron grinding: 1 part to 25 parts water; Steel Grinding: 1 part to 25 parts water |
| Refractometer Readings: | 10:1 = 3.6, 20:1 = 1.8, 30:1 = 1.2 |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 1 GALLON | 75012 | 6195901† | \$38.53 |
| 5 GALLON PAIL | 75052 | 5389906† | \$154.04 |
| 55 GALLON DRUM | 75552 | 4715128† | \$1,609.3 |

†Non-Stock Item.

- Non-foaming, biodegradable grinding fluid.
- Allows for rapid settling of residues which eliminates build up.
- Ideal for use in machines with magnetic brass rings.
- Dry-film rust protection.



APPLICATIONS:

General-purpose grinding.
Surface and Blanchard grinding.
Ferrous metals, titanium, brass, bronze, and copper.
Not recommended for aluminum.

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS | SERVICES | SOLUTIONS



POWERSAW SYNTHETIC CUTTING & GRINDING FLUID

POWERSAW Synthetic Cutting & Grinding Fluid is a moderate to heavy-duty synthetic metalworking fluid with non-chlorinated extreme pressure additives formulated specifically to meet the needs of sawing operations.

- Moderate to heavy-duty synthetic cutting fluid with non-chlorinated EP additives.
- Biodegradable, high lubricity, high rust protection, and low foaming.
- Good tramp oil rejection.
- Exceptional bio-stability provides long-term sump life when maintained.

**APPLICATIONS:**

Moderate to Heavy-duty operations.
Band & circular sawing, machining, grinding.
For use on ferrous metals.
Limited use on titanium.
Not recommended for aluminum, brass, bronze, and copper.

PROPERTIES:

| | |
|-------------------------|--|
| Appearance: | Dark Blue |
| Specific Gravity: | 1.06 |
| Vapor Density: | > 1 |
| pH Value: | 9 |
| Flash Point: | >200°F (93°C) |
| Boiling Point / Range: | 212°F (100°C) |
| Active sulfur content: | None |
| Total chlorine: | None |
| Density: | 8.9 lbs/gal (1063 kg/m ³) |
| Dilution Ratio: | Band, circular, and general sawing: 20:1 Machining and grinding: 10:1 to 20:1 |
| Water Solubility: | Soluble in water |
| Refractometer Readings: | 10:1 = 3.5, 20:1 = 1.8, 30:1 = 1.0 |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 5 GALLON PAIL | 76205 | 5389912† | \$208.82 |
| 55 GALLON DRUM | 76255 | 4597985† | \$2,181.85 |

†Non-Stock Item.

Rustlick™ CARBIDE POWERGRIND SYNTHETIC GRINDING FLUID

CARBIDE POWERGRIND prevents carbide damage and minimizes cobalt leaching. Transparent solution provides excellent lubricity and keeps wheels clean while providing dry-film corrosion protection.

- Recommended for machining tungsten carbide.
- Contains inhibitors to prevent cobalt leaching from all grades of carbide.
- Highly biostable and resistant to bacteria and fungus growth.

**APPLICATIONS:**

Diamond wheel grinding.
Ferrous metals.
Brass, bronze, and copper.
Limited use on stainless steel and titanium.
Not recommended for cast iron or aluminum.

PROPERTIES:

| | |
|-------------------------|------------------------------------|
| Appearance: | Opaque Green |
| Specific Gravity: | 1.04 |
| Vapor Density: | > 1 |
| pH Value: | 10.2 |
| Flash Point: | >200°F |
| Boiling Point / Range: | 212°F |
| Active sulfur content: | None |
| Total chlorine: | None |
| Density: | 8.7 lbs/gal |
| Dilution Ratio: | 10:1 to 30:1 |
| Water Solubility: | Soluble in water |
| Refractometer Readings: | 10:1 = 3.3, 20:1 = 1.7, 30:1 = 1.1 |

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------|----------------|
| 5 GALLON PAIL | 74052 | 4551185† | \$328.48 |
| 55 GALLON DRUM | 74552 | 6195896† | \$3,432.50 |

†Non-Stock Item.

Rustlick™ GROTAN® BIOCIDE



Rustlick™ Grotan® Biocide is a tank side biocide to control bacterial growth. The application is determined by size of sump. Recommended 10 oz per 50 gallons of mixed fluid.

APPLICATIONS:

Use according to manufacturer's specifications.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------|-------|---------|----------------|
| 1 GALLON | 77011 | 589958† | \$214.99 |

†Non-Stock Item.



SUMP-SIDE DEFOAMER

Rustlick™ Sump-Side Defoamer is an anti-foam liquid that treats foaming in machine sumps and washing systems.

- Non-chlorinated.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------|-------|----------|----------------|
| 1 GALLON | 78640 | 2270201† | \$96.61 |
| 55 GALLON | 78655 | 6195908† | \$107.84 |

†Non-Stock Item.



Rustlick™ B RUST PREVENTATIVE

Rustlick™ B Rust Preventative is a non-flammable water-soluble corrosion inhibitor designed to prevent in-process rusting of ferrous metals. It leaves a non-oily, dry, microscopic protective film & can be used for hydrostatic testing and vibratory finishing. Biodegradable and non-irritating, it is not subject to bacterial decomposition or rancidity and does not require removal prior to painting, plating, or assembly.

PROPERTIES:

| | |
|--|--|
| Appearance: | Green Liquid |
| Odor: | Amine-like |
| pH Value: | 9.1 @ 10% |
| Boiling Point / Range: | 212°F (100°C) |
| Flash Point: | >199.4°F (>93.0°C) Pensky-Martens Closed Cup |
| Evaporation Rate: | <1 |
| Vapor Density: | >1 |
| Density: | 9.1 lb/gal (1089 kg/m³) |
| Specific Gravity: | 1.05 |
| Dilution Ratio: (Hydrostatic & immersion testing, rinsing, washing, tumbling): | 10:1-30:1 |
| Refractometer Readings: | 10:1 (10%) = 4.0, 20:1 (5%) = 2.0, 30:1 (3%) = 1.3 |

- Use for short-term indoor storage; prevents flash rusting.
- No cleaning required before painting or plating.
- Can be used for sand blasting or vibratory finishing.



| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 1 GALLON | 73011 | 4608408† | \$44.56 |
| 5 GALLON PAIL | 73051 | 6195903 | \$187.04 |
| 55 GALLON DRUM | 73551 | 6195904† | \$1,953.77 |

†Non-Stock Item.

APPLICATIONS:

For short-term corrosion prevention.

Rustlick™ 631 MOISTURE DISPLACING RUST PREVENTATIVE

Rustlick 631 is a moisture-displacing rust preventative and corrosion inhibitor designed for long-term in-door use. It spreads into scratches and pores to displace moisture and leaves an oily thin-film. 631 is easily applied and removed, non-conductive, and safe to use on electrical parts.

- Displaces moisture and water.
- Easy aerosol spray application.
- No chlorinated solvents.
- Non-conductive.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 1 GALLON | 71011 | 5388561† | \$51.23 |
| 5 GALLON PAIL | 71051 | 4780505 | \$215.03 |
| 55 GALLON DRUM | 71551 | 4666831† | \$2,311.05 |

†Non-Stock Item.

APPLICATIONS:

For Corrosion & Rust Prevention.
Spray On Wherever Protection Is Needed.



Rustlick™ DRUM MIXER/PROPORTIONER FLOOD COOLANT ACCESSORIES

INCLUDES:

| | |
|-------------------------|-------------------------|
| Ball Valve | Metering Tip (From Kit) |
| Bung Adapter Assembly | Mounting Bracket |
| Discharge Tube Assembly | Nipple |
| Eductor Assembly | Stainer Washer |
| Flooding Ring | Suction Tube Assembly |
| Hose Swivel | |

- Automatically mixes coolant concentrate with water and dispenses the diluted solution into any container.
- Works with all coolant types.
- Guarantees precise coolant concentration.
- Prevents messy fluid spills.
- Reduces coolant use.



APPLICATIONS:

Use the Drum Mixer/Proportioner to dilute and mix coolant concentrate with the proper amount of water to create the perfect concentration for your operations.

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS • SERVICES • SOLUTIONS

DYKEM® STEEL BLUE® LAYOUT FLUID

Machine shop operators depend on DYKEM® STEEL BLUE® Layout Fluid to scribe sharp, clear, precise lines. When applied, our layout fluids provide a uniform deep blue color that prevents glare and dries in minutes. All Dykem® Layout Fluids create an extremely thin film which adds practically no thickness to the work piece and remains flexible without cracking and chipping.



- STEEL BLUE® provides a uniform deep color that prevents glare and eye strain.
- Allows for sharp, clear, and precise scribes.
- Provides a thin film without cracking/chipping and adds practically no thickness to work surface.
- Meets A-A 59168 dated 21st May 2014 paragraph 3.1.1 thru 3.2.4.4 with the exception of 3.3 (chemical resistance to chlorinated solvents).
- Dries within minutes.
- Reveals defects and pinholes in a variety of surfaces.
- Great for inspection of gear tooth contact patterns.
- Available in multiple package sizes.
- Does not contain any reportable amounts of Xylene.

APPLICATIONS:

Safe on most surfaces.

Removable with DYKEM® Remover & Cleaner.

Surface tests should be run to determine compatibility prior to use.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|---------------------------|-------|---------------|----------------|
| 2 OZ. FELT TIP APPLICATOR | 80200 | 95105 | \$8.49 |
| 4 OZ. BRUSH-IN-CAP | 80300 | 101142 | \$10.19 |
| 8 OZ. BRUSH-IN-CAP | 80400 | 107252 | \$14.09 |
| 16 OZ. AEROSOL | 80000 | 83835 | \$15.87 |




SCAN TO LEARN MORE
ABOUT STEEL BLUE® LAYOUT FLUID



INDUSTRIAL INSIGHTS

DYKEM® STEEL RED™ LAYOUT FLUID

- STEEL RED™ provides a uniform deep color that prevents glare and eye strain.
- Allows for sharp, clear, and precise scribes.
- Provides a thin film without cracking/chipping and adds practically no thickness to work surface.
- Meets A-A 59168 dated 21st May 2014 paragraph 3.1.1 thru 3.2.4.4 with the exception of 3.3 (chemical resistance to chlorinated solvents).
- Dries within minutes.
- Reveals defects and pinholes in a variety of surfaces.
- Great for inspection of gear tooth contact patterns.
- Available in multiple package sizes.
- Does not contain any reportable amounts of Xylene.

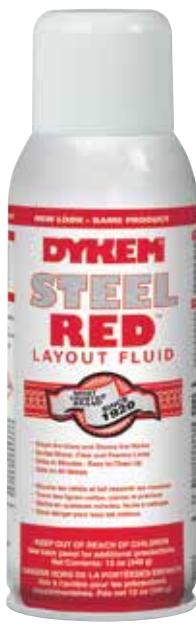

SCAN TO SHOP DYKEM
ONLINE-ONLY PROMOTIONS



APPLICATIONS:

Safe on most surfaces.

Removable with DYKEM® Remover & Cleaner.

Surface tests should be run to determine compatibility prior to use.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|---------------------------|-------|----------------|----------------|
| 2 OZ. FELT TIP APPLICATOR | 80296 | 5204495 | \$8.49 |
| 4 OZ. BRUSH-IN-CAP | 80396 | 107001 | \$10.19 |
| 8 OZ. BRUSH-IN-CAP | 80496 | 112978 | \$14.09 |
| 16 OZ. AEROSOL | 80096 | 89144 | \$16.99 |

DYKEM® CROSS CHECK™ TORQUE SEAL® TAMPER-PROOF INDICATOR PASTE

DYKEM® Cross Check™ Torque Seal® Tamper-Proof Indicator Paste provides a convenient visual method for identification of vibratory loosening or tampering in nuts, bolts, fasteners, and assemblies. Provides warranty protection against tampering. Marks will be easily broken if parts are tampered with or become loose. Highly visible under ambient light and fluorescent under UV light. Excellent adhesion to metal and other substrates.

APPLICATIONS:

Assemblies
Bolts
Fasteners
Nuts

**SCAN TO LEARN MORE
ABOUT CROSS CHECK™ TORQUE SEAL®**

**A&M
INDUSTRIAL** INSIGHTS

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------------|-------|----------------|----------------|
| ORANGE 1 OZ. TUBE | 83314 | 4553951 | \$6.66 |
| GREEN 1 OZ. TUBE | 83315 | 6195964 | \$6.66 |
| RED 1 OZ. TUBE | 83316 | 4708718 | \$6.66 |
| YELLOW 1 OZ. TUBE | 83317 | 4792297 | \$6.66 |
| BLUE 1 OZ. TUBE | 83318 | 4818509 | \$6.66 |
| WHITE 1 OZ. TUBE | 83319 | 4708152 | \$6.66 |
| PINK 1 OZ. TUBE | 83320 | 4748078 | \$6.66 |
| GRAY 1 OZ. TUBE | 83321 | 6195963 | \$6.66 |

- Tamper proof torque mark.
- Safe for most surfaces.
- Highly visible- blue, yellow, red, green, and orange colors are fluorescent under black light.
- Excellent adhesion.
- Visually detects loose nuts & bolts.
- Provides warranty protection.
- 3 Year Shelf Life.
- Case quantity: (24) 1 oz. tubes

Specifications:

- Approved product replacement for Organic Products Company F-900 Torque Seal.
- BOEING Specification, BMS8-45 Type II.
- NORTHROP GRUMMAN GC115UG rev K - Colors: Orange, Red, Yellow, Blue, White, Pink.
- Lockheed Martin 302-40812.
- CPW487 Rev. B.

DYKEM® REMOVER & PREP

The preferred solution for removal of DYKEM® Layout Fluids. DYKEM® REMOVER & PREP is non-chlorinated and leaves no residue, preparing the part for the next production.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|-------------------|
| 930 ML | 82638 | 136412 | \$17.96 |
| 1 GALLON | 82738 | 10734 | \$51.41 |
| 5 GALLON PAIL | 82838 | 285947† | \$222.58 |
| 55 GALLON DRUM | 82938 | 6195983† | \$2,454.72 |

†Non-Stock Item.

- Removes layout fluids from metal surfaces.
- Dries in minutes.
- Does not contain toluene or chlorinated solvents.
- Leaves no residue.



Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS | SERVICES | SOLUTIONS

DYKEM BRITE-MARK® MEDIUM PERMANENT PAINT MARKER / VALVE ACTION

Our most popular marker, the BRITE-MARK® Medium features a medium tip for clear, bold markings. DYKEM® BRITE-MARK® is a general purpose permanent marker ideal for making clear, bold markings on almost any surface. Its quick drying, oil-based paint withstands indoor and outdoor conditions without fading, chipping or losing its opacity. DYKEM® BRITE-MARK® can be used to permanently identify inventory, assemblies, tools, finished products or work-in-progress while resisting most work related abuses or compounds.



APPLICATIONS:

Safe on most surfaces.

Removable with DYKEM® Remover & Cleaner.

Surface tests should be run to determine compatibility prior to use.

- Makes permanent bright marks on metal, rubber, plastic, glass, concrete, leather, stone, wood, vinyl and more.
- Quick drying, oil based, UV resistant paint withstands harsh indoor and outdoor conditions.
- Does not contain any HAP's (Hazardous Air Pollutants) which makes them a smart alternative to using spray paint and stencil for big, bold marks.
- Does not contain any reportable amounts of Xylene.
- Markers can be used to permanently identify inventory, assemblies, tools, finished products or work in progress while resisting most work related abuses or compounds.
- Valve action mechanism prevents paint in barrel from drying when the cap is left off.
- Bullet tips are replaceable to assure complete use of paint in each marker.
- Heavy duty aluminum body with large paint capacity.
- Top selling marker with a felt tip for smooth, even marks.

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|-------------|-------|---------------|----------------|
| BLACK | 84002 | 296096 | \$4.06 |
| BLUE | 84001 | 166672 | \$4.06 |
| GREEN | 84007 | 296102 | \$4.06 |
| ORANGE | 84005 | 296100 | \$4.06 |
| RED | 84006 | 296101 | \$4.06 |
| WHITE | 84003 | 83641 | \$4.06 |
| YELLOW | 84004 | 137468 | \$4.06 |

Dymon® THE END.™ WASP & HORNET KILLER

THE END.™ Brand of insect killers are formulated using advanced technology to be some of the most powerful insecticides available.



- Instant knockdown.
- Sprays up to 20 feet.
- dielectric breakdown voltage of 40,700 volts.
- Kills wasps, hornets, yellow jackets, and bees.
- Kills nest and insects with residual action.
- Case quantity: 12/case

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|----------------|----------------|
| 12 OZ. AEROSOL | 18320 | 6195924 | \$8.32 |

Dymon® THE END.™ DRY FOG™ FLYING INSECT KILLER



- Water-based insecticide.
- Kills flies, mosquitoes, gnats, midges, wasps, hornets, and flying moths.
- Case quantity: 12/case

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|----------------|-------|-----------------|----------------|
| 14 OZ. AEROSOL | 45120 | 6195925† | \$13.36 |

†Non-Stock Item.

SCRUBS® INSECT SHIELD™ INSECT REPELLENT WIPES

SCRUBS® INSECT SHIELD™ Insect Repellent Wipes feature an insect Repellent formula combined with a large, lint-free wipe. The 30% DEET insect Repellent formula provides a safe, yet highly effective level of protection. The wipe allows for a one-step, controlled application making it safer than aerosol and pump sprays to use around the face with no worry of inhaling mist or vapors. Once applied, the formula is waterproof and greaseless so it won't interfere with activities or tasks. Each wipe is individually packaged making it convenient to take along and easy to store.

- 30% DEET.
- Easy Application.
- Non-greasy.
- Waterproof Formula.
- Long Lasting Protection.

APPLICATIONS:

| | |
|--------------|------------|
| Biting Flies | Mosquitoes |
| Chiggers | Ticks |
| Fleas | |



| DESCRIPTION | MFR # | A&M # | SALE PRICE PER BOX |
|-------------|-------|---------|--------------------|
| 100/BOX | 91401 | 4627280 | \$103.00 |

SCRUBS® SUNSCREEN LOTION

SCRUBS® Sunscreen Lotion is a broad spectrum, SPF 30+ sunscreen lotion in a convenient single-dose pouch. The non-greasy formula offers UVA/UVB protection and is PABA-free and oil-free. Contains added aloe vera gel and vitamin E. Passed lineman's glove test.

- SPF 30+, Broad Spectrum
- Resistant to water and sweat for up to 80 minutes.
- UVA/UVB Protection.
- PABA-free.
- Oil-free.
- Non-greasy.
- Contains Aloe Vera Gel & Vitamin E.
- Passed Lineman's Glove Test (Type 1 Class 2 ANSI/ASTM D 120).



| DESCRIPTION | MFR # | A&M # | SALE PRICE PER BOX |
|-------------|-------|---------|--------------------|
| 100/BOX | 92101 | 4608608 | \$110.00 |

SCRUBS® NO RINSE FOOD SURFACE DISINFECTANT WIPES

SCRUBS® NO RINSE Food Surface Disinfectant Wipes simplifies training and cleaning processes by cleaning and disinfecting² with no required after-rinse. These pre-moistened wipes leave your facility clean and disinfected in one time-saving step, all while eliminating the guesswork of measuring and portioning cleaning chemicals. No Mixing. No Spraying. No Mess.

APPLICATIONS:

| | |
|-----------------------------------|--------------------------------------|
| Appliances | Deli Slicers |
| Back-Of-House Restaurant Cleaning | Dining Tables |
| Bars | Food Preparation Lines |
| Booths | Food Trays |
| Counters | Non-Wood Cutting Boards ² |

KILL CLAIMS:

- Bacteria
- HIV-1 [AIDS Virus]
- Human Norovirus
- Escherichia Coli
- Escherichia Coli O157:H7
- Influenza A Virus [H1N1]
- Klebsiella Pneumoniae
- Listeria Monocytogenes
- Measles Virus
- Pseudomonas Aeruginosa
- SARS-Related Coronavirus² (Cause Of COVID-19)
- Salmonella Enterica
- Salmonella Typhi
- Shigella Dysenteriae [Shigella]
- Staphylococcus Aureus
- Staphylococcus Aureus - Methicillin-Resistant [MRSA]
- Viruses
- Yersinia Enterocolitica

| DESCRIPTION | MFR # | A&M # | SALE PRICE EA. |
|--|-------|----------|----------------|
| (80) 7" X 8" TOWELS PER TUB ^t | 97080 | 6195929† | \$5.63 |

^tNon-Stock Item.

- Kills 99.9% of bacteria on food contact surfaces² in 30 seconds.
- Cleans and disinfects in one step.²
- No rinse required, even on food contact surfaces.
- Simplifies your training process.
- Pre-moistened wipe eliminates the need for chemical dilution systems.
- Reduce risk of cross contamination between treated surfaces.¹
- Ideal for use on food preparation lines, cutting boards², trays, counters, appliances, dining tables, and more.
- Kills food-borne pathogens including Listeria monocytogenes, Escherichia coli, Salmonella typhi, and Human Norovirus
- Case quantity: 6 Tubs/Case



¹On hard non-porous surfaces.

²When used according to the directions for disinfection.

Headquarters & NJ Sales Office
Rahway, NJ
800.864.2660

New England Regional Office
West Lebanon, NH
800.225.6711

Northern NJ Regional Office
Fair Lawn, NJ
800.622.1363

CT Regional Office
Middletown, CT
800.771.1233

PA Regional Office
Stroudsburg, PA
855.207.0400

A&M
INDUSTRIAL
PRODUCTS | SERVICES | SOLUTIONS

SCRUBS® ALL PURPOSE CLEANING WIPES



EXCLUSIVE
**WEB
DEALS**

SCAN TO SHOP SCRUBS®
ONLINE-ONLY PROMOTIONS



SCRUBS® All Purpose Cleaning Wipes combine a powerful solvent blend with a highly effective detergent and emulsifier package and a strong wipe that can handle a variety of everyday cleaning tasks. Featuring a pleasant citrus scent, these wipes contain no harsh chemicals and do not leave a heavy residue.

- Formulated to be strong and effective at cleaning dirt and grime.
- Quick clean of hands on the go or when traditional hand washing facilities are not readily available.
- Cleaning formula has been proven to be effective in breaking down and removing everyday soils and stains.
- The wipes can handle tough messes without tearing or falling apart during use.
- Packed with enough cleaning power to tackle multiple messes with each wipe.

APPLICATIONS:

| | |
|--------------------------|------------------------|
| Airport Terminals | Kitchens & Restaurants |
| Auto Interiors | Marinas |
| Bus Stations | Multi-Family Dwellings |
| Cafeterias & Food Courts | Office Buildings |
| Catering Facilities | Schools |
| Child Care Facilities | Shopping Centers |
| Correctional Facilities | Spas |
| Gyms | Train Stations & More! |

| DESCRIPTION | MFR # | A&M # | SALE PRICE |
|---|-------|----------------|---------------------|
| (72) 10" X 12" TOWELS PER TUB, SINGLE TUB | 96580 | 6461057 | \$13.50/EA. |
| (72) 10" X 12" TOWELS PER TUB, 6 TUB CASE | 96580 | 6476514 | \$75.00/CASE |

SCRUBS® SCRUBS IN-A-BUCKET® HAND CLEANER TOWELS



SCRUBS IN-A-BUCKET® Hand Cleaner Towels combine an advanced cleaning formula with a strong, dual-textured towel to thoroughly clean hands and surfaces ANYWHERE, ANYPLACE, ANYTIME!® The clean, citrus-scented formula loosens and dissolves industrial soils while leaving hands free from dryness and irritation. The Rough Touch® blue towel locks in soil to prevent it from transferring back onto hands and surfaces. Hands are left feeling clean with no sticky residue and no rinsing required.

- Clean, citrus fragrance.
- Advanced cleaning power.
- For use on hands & surfaces.
- No sticky residue.

APPLICATIONS:

| | |
|-------------|-------------|
| Adhesives | "Icky-PIC" |
| Asphalt | Inks & Dyes |
| Cable Jelly | Oils |
| Caulks | Paints |
| Dirt | Lubricants |
| Epoxy | Tar |
| Grease | Urethanes |

| DESCRIPTION | MFR # | A&M # | SALE PRICE |
|--|-------|-----------------|-----------------------|
| (72) 10" X 12" TOWELS PER TUB, SINGLE TUB | 42272 | 74583 | \$19.00/EA. |
| (72) 10" X 12" TOWELS PER TUB, 2 TUB PACK | 42272 | 6406886 | \$36.00/2-PACK |
| (72) 10" X 12" TOWELS PER TUB, 6 TUB CASE | 42272 | 6163175 | \$80.00/CASE |
| (100) 5" X 12" INDIVIDUALLY WRAPPED TOWELS | 42201 | 4804313† | \$54.00/CASE |

†Non-Stock Item.



SCAN TO LEARN MORE
ABOUT HOW SCRUBS PROVIDES
SIGNIFICANT COST SAVINGS
**A&M
INDUSTRIAL INSIGHTS**



Pages 4-6 & 11



Pages 6-7



Pages 8-9



Pages 12-14



Pages 15-19



Pages 20-22



Page 22



Pages 23-24

Valid thru 12/31/26 in US only. Specifications and pricing are subject to change without notice, please see our website or contact your rep for current pricing.
Not responsible for typographical errors. Offers cannot be combined with any other promotional or discount offers. Please see our website for a full listing of our Terms & Conditions.