

DB-C5-STX DashMatch™

2024-Newer Chevy

1. Position DB-C5-STX onto dash as shown in (Images 1 & 2) below.

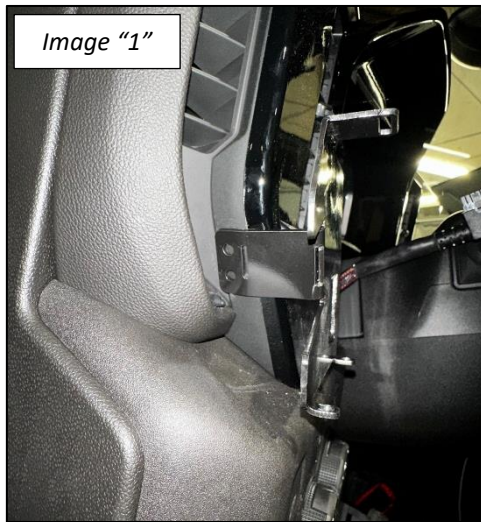



Image "3"




2. Using #2 Phillips screwdriver, secure mounting tab A to bottom of chrome trim under vent using (1) #6 screw as pictured in (Image 3)

CAUTION: DO NOT OVER-TIGHTEN SCREWS
SECURING DB-C5-STX

3. Using #2 Phillips screwdriver, secure mounting tab B to dash as pictured in (Image 4) using (2) #6 screws.

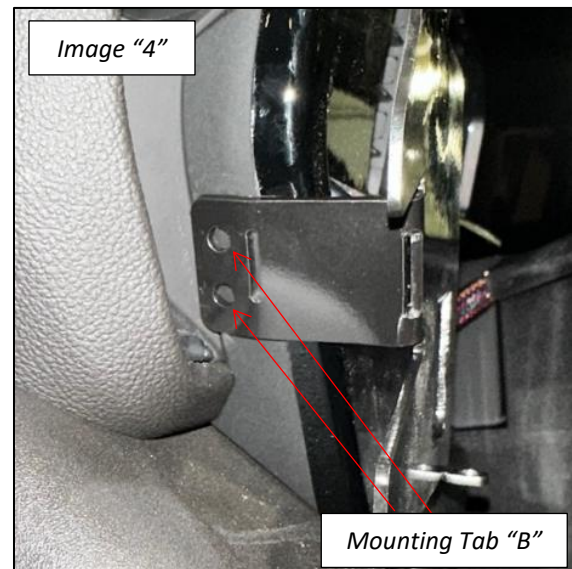

4. Install HYDRASTX® in-cab controller onto dash match bracket by tabbing into DB-C5-STX
5. Secure in-cab controller to DB-C5-STX using (2) #6 machine screws into the mounting holes of the in-cab controller as pictured in (Image 5).

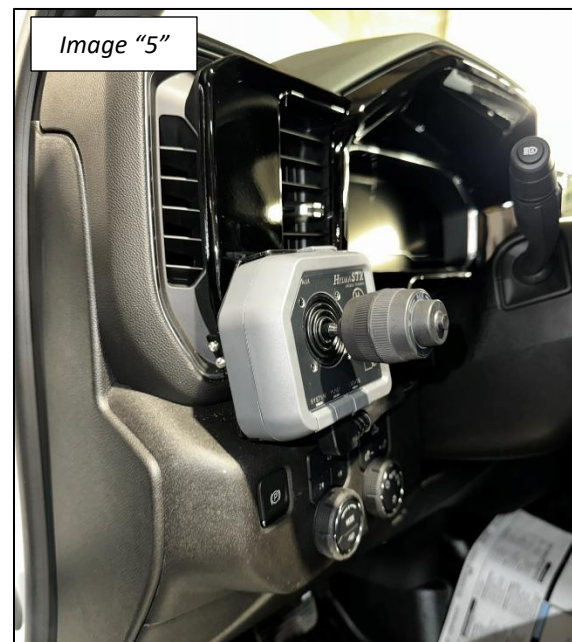

CAUTION: THE SCREWS SECURING THE IN-CAB CONTROLLER ARE THREADING INTO PLASTIC, NOT METAL, DO NOT OVER-TIGHTEN SCREWS SECURING IN-CAB CONTROLLER