

DB-C5-DENALI-STX DashMatch™

2024 Chevy Denali

1. Position DB-C5-DENALI-STX onto dash as shown in (Images 1 & 2) below.

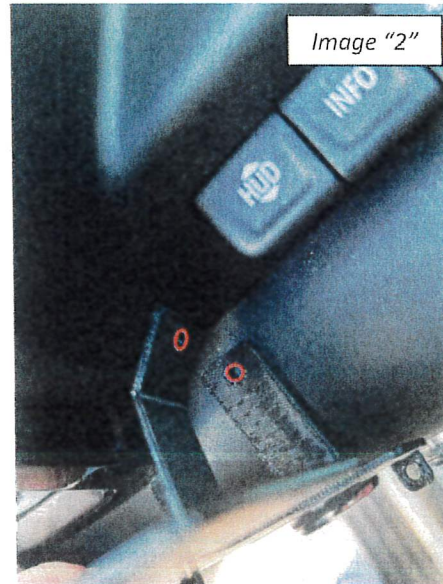


Image "3"

2. Using #2 Phillips screwdriver, secure mounting tab A and B to top of black trim using (2) #6 screws as pictured in (Image 3)

**CAUTION: DO NOT OVER-TIGHTEN SCREWS
SECURING DB-C5-DENALI-STX**

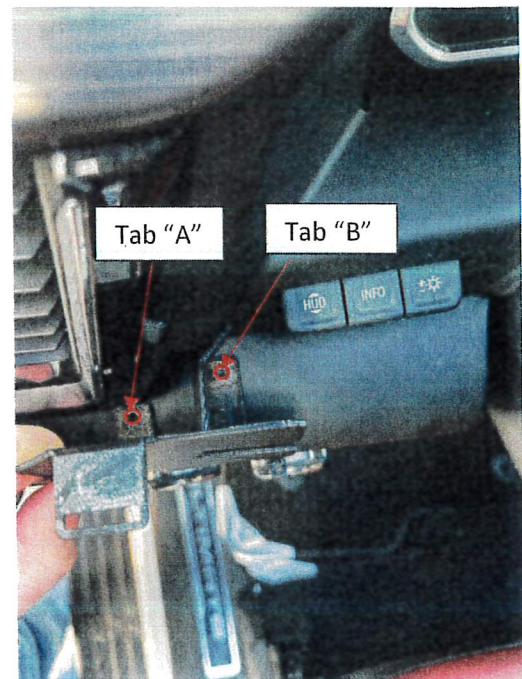


Image "4"

3. Using #2 Phillips screwdriver, secure mounting tab B to dash as pictured in (Image 4) using (1) #6 screw.



Image "5"

4. Install HYDRASTX® in-cab controller onto dash match bracket by tabbing into DB-C5-DENALI-STX
5. Secure in-cab controller to DB-C5-DENALI-STX using (2) #6 machine screws into the mounting holes of the in-cab controller as pictured in (Image 5).



CAUTION: THE SCREWS SECURING THE IN-CAB CONTROLLER ARE THREADING INTO PLASTIC, NOT METAL, DO NOT OVER-TIGHTEN SCREWS SECURING IN-CAB CONTROLLER