

### TECH SPECS


Frame type	floor model			
Panels	Stainless Steel			
Output capacity per cycle	lt	20	gal	5,28
Crate dimensions	cm	132x50x175	in	52x31,5x69
Width (A)	cm	61	in	24
Depth (B)	cm	115	in	45,3
Depth with shelf (C)	cm	122,5		48,2
Height (H)	cm	140	in	55,1

### AIR MODEL

Max power	kW	6,5	HP	8,8
Voltage	208-230 Volt/60Hz/1Phase			
Drive motor	kW	3	HP	4
Compressor power	kW	2,9	HP	3,9
Breaker size	Amp 32			
Freon R404A	g	2000	Oz	70,55
Refrigeration condensation	Air			
Machine weight	kg	280	lbs	517,3
Crate weight	kg	330	lbs	728
Min. Clearance	mm	203	in	8

### WATER MODEL

Max power	kW	6,1	HP	8,3
Voltage	208-230 Volt/60Hz/1Phase			
Drive motor	kW	3	HP	4
Compressor power	kW	2,9	HP	3,9
Breaker size	Amp 32			
Freon R404A	g	900	Oz	31,75
Refrigeration condensation	Water			
Machine weight	kg	275	lbs	606,3
Crate weight	kg	320	lbs	705,5
Water connection Npt	Ø		inches	1/2
Min. water pressure	bar	2	Psi	29
Max. water pressure	bar	3	Psi	40

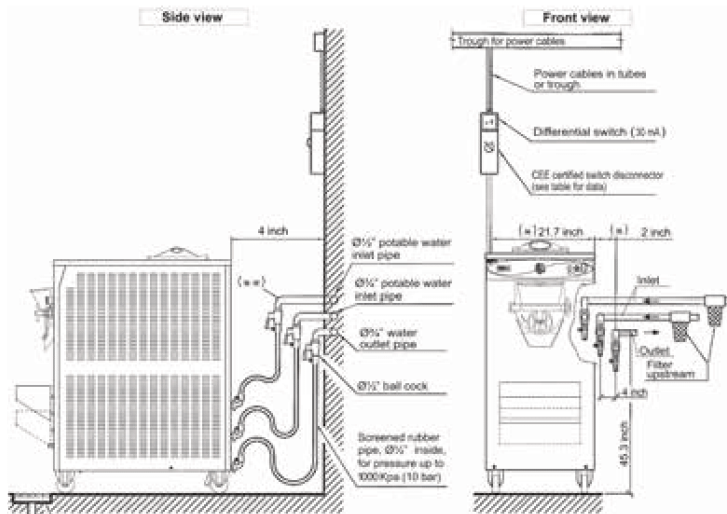

(\*) The Dimensions of the machines may vary but the water and electrical connections are always on the left hand side of the machines.

(\*\*) The cock is shown raised only for purposes of illustration. In fact it is next to the other one.

MAKE THE SAME CONNECTIONS FOR EACH MACHINE