

# MWLD | Single-Zone | Wall Only



Cold Climate | High Efficiency Heat Pump Outdoor Units | R-32 | 60 Hz

RESIDENTIAL / COMMERCIAL  
PRODUCT SPECIFICATIONS (EHB)

SEER2 up to 25.0

HSPF2 up to 11.0

0.75 to 2 Tons

Cooling Capacity - 9,000 to 22,000 Btuh

Heating Capacity - 11,000 to 20,000 Btuh

Heating down to -22°F (-30°C)



MWLD018S6S and MWLD024S6S  
Heat Pump Outdoor Units




MWMDS6 Wall-Mount Units  
with Wireless Remote Control  
(furnished)



MWLD009S6S and MWLD012S6S  
Heat Pump Outdoor Units  
(MWLD015S6S not shown)



## MODEL NUMBER IDENTIFICATION

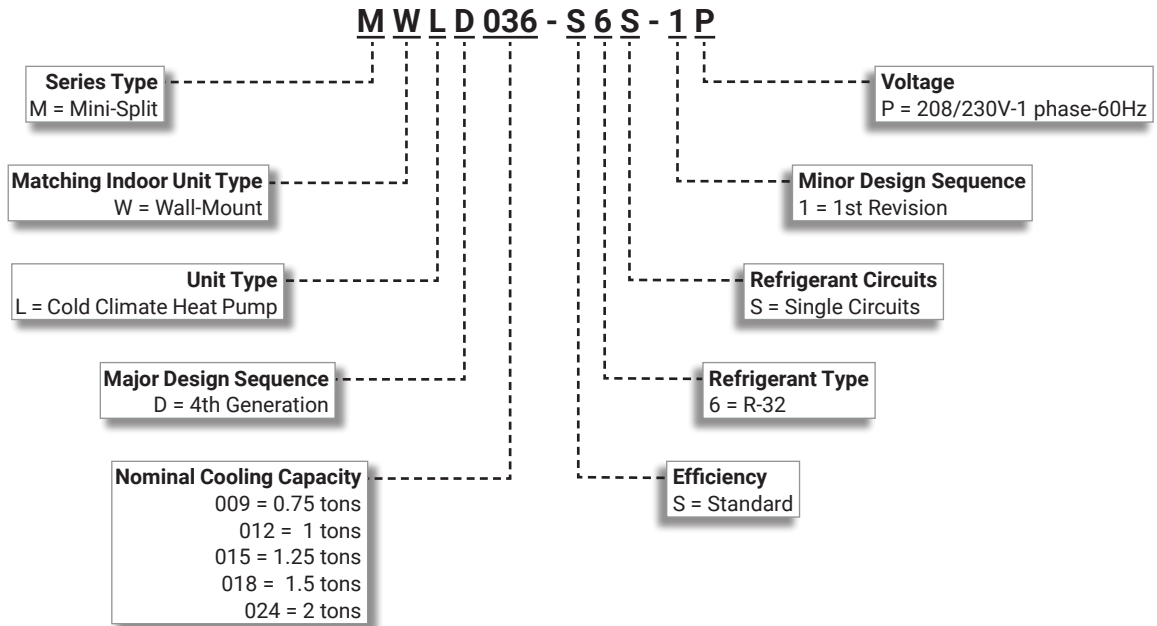

## CONTENTS

AHRI System Matches . . . . .	12
Approvals And Warranty . . . . .	4
Capacity Correction. . . . .	26
Dimensions . . . . .	18
- Center Of Gravity. . . . .	21
- Unit . . . . .	18
Features . . . . .	4
- Indoor Units Overview. . . . .	6
- Outdoor Units . . . . .	4
Installation Clearances . . . . .	22
- Multiple Outdoor Units . . . . .	23
- Single Outdoor Unit . . . . .	22
Mobile Apps . . . . .	2
Model Number Identification. . . . .	2
Operation Range . . . . .	25
Optional Accessories - Order Separately . . . . .	11
Sound Data . . . . .	24
Specifications . . . . .	9
- 009-015. . . . .	9
- 018-024. . . . .	10
System Components . . . . .	3

## MOBILE APPS



# SmartThings

- SmartThings is a free app that uses Wi-Fi to connect smart devices built on the Matter protocol, regardless of the company that makes them
- Users can remotely regulate temperature, adjust settings, receive real-time updates about system performance and energy usage, as well as troubleshoot solutions if service is needed
- Quickly and easily connect, automate and manage your smart home devices through SmartThings
- SmartThings is compatible with hundreds of smart home brands

- With SmartThings, you can connect, monitor and control multiple smart home devices quicker and easier
- Connect smart TVs, smart appliances, smart speakers and brands like Samsung, Ring, Nest and Philips Hue - all from one free app
- Control your smart devices using voice assistant skills including Alexa, Bixby and Google Assistant



## SYSTEM COMPONENTS



Wireless Remote Control  
(Included with all indoor units)

Also available:  
Advanced Wired Control  
Touchscreen Controller  
Thermostat Adaptor  
(use with any 24V thermostat)



MWMD Wall-Mounted  
Non-Ducted Indoor Unit



Single zone heat pumps offer a wide range of capacities and indoor unit configurations. One outdoor unit is matched to one indoor unit.

MWLD009 thru 012 Outdoor Unit  
(not shown - MWLD015, 018 and 024)

## APPROVALS AND WARRANTY

### **APPROVALS**

- AHRI Standard 210/240-2023 certified with Addenda 1 and 2
- ENERGY STAR® certified units are designed to use less energy, help save money on utility bills, and help protect the environment
- Rated According to U.S. Department of Energy (DOE) test procedures
- Outdoor units and components UL and CEC bonded for grounding to meet safety standards for servicing
- ETL certified for the U.S. and Canada

### **WARRANTY**

- Compressor - Limited seven years
- All other covered components
  - Limited five years in all applications
- Accessories and controls - Limited one year

**NOTE** - Refer to Lennox Basic Limited Warranty at [www.Lennox.com](http://www.Lennox.com) for additional details.

## FEATURES

### **APPLICATIONS**

- Cold climate heating down to -22°F (-30°C)
- 0.75 through 2 ton
- Single phase power supply (208/230V)
- Outdoor unit powers indoor unit
- Sound levels as low as 45 dBA
- Ductless mini-split systems provide a wide range of capacities and applications and provide an alternative when a ducted system is impractical or cost prohibitive
- Units shipped completely factory assembled, internally piped, and wired

**NOTE** - Outdoor unit is designed for outdoor location only.

### **REFRIGERATION SYSTEM**

#### **R-32 Refrigerant**

- Low GWP (Global Warming Potential)
- Zero ODP (Ozone Depletion Potential)
- Low Toxicity/Lower Flammability - A2L
- Unit is factory pre-charged

#### **Outdoor Coil**

- Aluminum fins fitted to copper tubes

#### **Outdoor Fan**

- Direct drive fan moves large air volumes uniformly through entire outdoor coil for high refrigeration capacity
- Fan guard furnished

## OUTDOOR UNITS

### **Refrigerant Line Connections, Service Valve**

- Flare connection lines are located on side of unit cabinet
- Fully serviceable brass service valve prevents corrosion and provides access to refrigerant system

### **COMPRESSOR**

#### **Variable Frequency Rotary Compressor**

- Compressor features high efficiency operation
- Balanced for reduced vibration and quiet operation
- Brushless DC motor uses powerful Neodymium magnets, which are approximately 15-20 times stronger than ferrite magnets used in conventional AC compressors

#### **Compressor Crankcase Heater**

- Protects against liquid refrigerant migration that can occur during low ambient operation

**CONTROLS****DC Inverter Control**

- Provides continuous operation, while adjusting capacity according to room temperature
- The accurate sensing of cooling loads prevents frequent changes in capacity and ensures efficient, economical operation

**Inverter Module Protection**

- Protects against differences in current, voltage and temperature
- Displays code on the indoor unit indicating a need for servicing

**Outdoor Unit Microprocessor**

- Electronic expansion valve control
- Automatic compressor timed-off protection (3 minutes)
- Temperature sensor
- LEDs on control display error codes and assist in troubleshooting
- 4-Way reversing valve control

**Electronic Expansion Valve**

- Furnished on all models

**Compressor Overcurrent Protection**

- Overcurrent protection can result due to any of the following:
  - Ambient temperature is too high
  - Locked rotor on the compressor
  - Outdoor air is blocked or restricted

**Condenser High Temperature Protection**

- Condenser high temperature can occur due to any of the following conditions:
  - High outdoor ambient
  - Outdoor fan blocked
  - Outdoor coil blocked
- The outdoor coil thermistor continuously monitors the temperature and communicates with the microprocessor
- Depending on the temperature measured, the compressor will be allowed to increase the frequency if needed to meet the load or is forced to run at the current or reduced frequency
- If the temperature becomes excessively high the compressor will be de-energized

**Compressor Discharge Temperature Protection**

- The compressor discharge line thermistor continuously monitors the temperature and communicates with the microprocessor
- Depending on the temperature measured, the compressor will be allowed to increase the frequency to meet the load or is forced to run at the current or reduced frequency
- If the temperature becomes excessively high, the compressor will be de-energized

**Voltage Protection**

- Protects unit from low or high voltage fluctuations

**Terminal Strip**

- Furnished for easy wiring connections

**Defrost Control**

- Defrost cycle is automatically enabled if there is a build-up of frost on the outdoor coil
- Outdoor fan operation is terminated during the defrost cycle
- Indoor fan changes to ultra low speed during the defrost cycle to help bring warm refrigerant back to the outdoor coil to assist during defrost operation
- Defrost LED is lit on the indoor unit panel on the front cover during a defrost cycle

**Reversing Valve**

- 4-way interchange reversing valve effects a rapid change in direction of refrigerant flow resulting in quick changeover from cooling to heating and vice versa
- Valve operates on pressure differential between outdoor unit and indoor unit of the system

**CABINET**

- Constructed of heavy gauge steel
- Tabs on unit base allow secure mounting to slab
- Condensate drain outlets furnished on unit base

**NOTE** - Drain must be field furnished.

- Pan heater prevents ice build-up in the bottom of the unit during heating operation
- Access cover for power and control wiring connections
- Access cover for service valves

**WALL-MOUNTED INDOOR UNITS**

- Eliminates ductwork by utilizing refrigerant piping to preserve space in the attic or closet
- Compact and unobtrusive design also blends seamlessly into any space
- Low-sound
- Swing louver angles to 90°
- **Calm Air Feature** - When louvers are closed, thousands of micro holes in panel provide a dispersed, gentle flow of air
- Unit installs horizontally on a vertical wall
- Vacuum or washable reusable filter media
- Flare connections
- Wall plate furnished for installation
- Wireless remote controller furnished

**NOTE** - See the MWMD Product Specifications.

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

### OUTDOOR UNITS

(See Optional Accessories Table on page 11 for Selection)


- Equipment Pads
- Equipment Stands
- Hail Guards
- Wind Baffles
- Wall Brackets
- Line Sets
- Control Wiring
- Disconnects
- Whips

### SPEEDICHANNEL™ SYSTEM



- SpeediChannel™ is a channel system covers system line sets
- Two-part system has a base and a cover
- Base is fastened to a wall or ceiling with plastic clips (SpeediClip™) that snap into a channel already molded into the base
- Cover fits on top of the base
- Manufactured from rigid PVC, which is UL rated and resistant to UV light
- System is a natural color that closely matches typical mini-split outdoor units
- Can be painted as desired to match any wall color

#### Typical Application

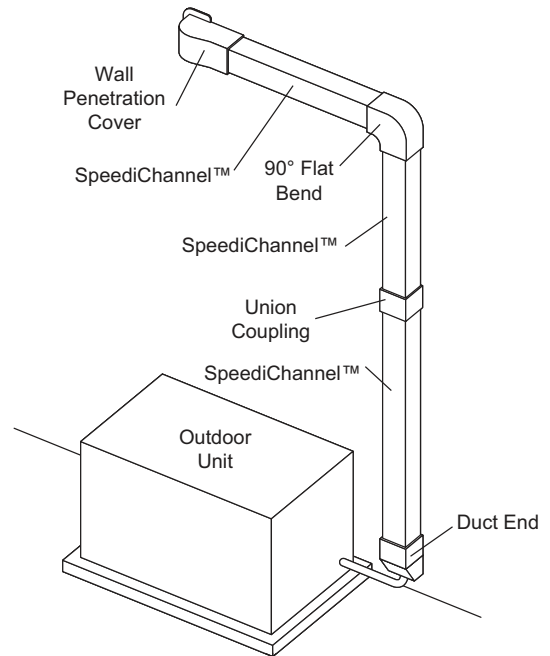

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

### **SPEEDICHANNEL™ SYSTEM (continued)**

#### **SpeediChannel™ Starter Kit**

- The starter kit includes (1) Coupling, (1) Wall Penetration, (1) Inside Elbow, (1) Long Radius Flat Bend, (10) Speediclips™, (10) 11 in. Cable Ties, and (1) SpeediChannel Instruction Booklet

#### **Duct End**

- Duct Ends are used to terminate a run of SpeediChannel™ to a small opening just large enough for the line set and condensate drain line to pass through



#### **Flat Wall Escutcheon**

- Flat Wall Escutcheons are used to cover a rough opening in a soffit, wall, or ceiling penetration




- One side of the escutcheon is flat to allow for a SpeediChannel™ to run along a wall and to penetrate through an adjacent wall or ceiling
- This is the most common type of wall penetration
- Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel™

#### **Flex Joint**

- A Flex Joint is an accordion-style piece of SpeediChannel™
- The flex joint can be extremely flexible when routing a SpeediChannel™ system around an obstacle
- Each joint is 20 in. long and can be combined together for longer flex runs
- The flex joint does not require the use of a union coupling
- The flex joint slides tightly inside the SpeediChannel™ system

#### **T-Joint**

- T-Joints are used for creating a tee connection between three pieces of SpeediChannel™
- Each tee is individually packed and furnished with stainless steel screws



#### **Union Coupling**

- Union Couplings are used for joining two pieces of SpeediChannel™
- Each coupling is individually packed and furnished with stainless steel screws



#### **Wall Penetration Cover**

- Wall penetration covers are used to transition from the SpeediChannel™ system to a through wall penetration
- Wall covers are designed to allow for easy installation, even after the line set has been installed
- A hooking and fastening arrangement allows for quick installation
- Each wall cover is individually packed, and furnished with stainless steel screws to attach the wall cover to the base
- Three screws are necessary to fasten the wall cover to the wall construction, regardless of the type of installed system



#### **45° and 90° Flat Bend Elbows**

- 45° Flat Bends are used to route the SpeediChannel™ around obstacles
- Each bend is individually packed and furnished with stainless steel screws




45°



90°

#### **90° Inside Elbow**

- 90° Inside Elbows are used to route the SpeediChannel™ around an inside corner
- Each elbow is individually packed and furnished with stainless steel screws



#### **Mount Block White Qty. (2) 14 in. and (2) 36 in.**

- Mount Blocks are used as mounting bases when outdoor units must be bolted down
- End caps (for aesthetics) come furnished with mounting bolts
- Maximum load capacity is 900 pounds per mounting block
- Installation temperatures range from -4°F to 140°F
- Mount blocks fit all mini-split outdoor units with a sliding rail feature



SPECIFICATIONS		009-015		
Model		MWLD009S6S	MWLD012S6S	MWLD015S6S
<b>Tons</b>		0.75	1	1.25
<b>Ambient Temperature Range - °F</b>	Cooling	0 to 115	0 to 115	0 to 115
	Heating	-22 to 75	-22 to 75	-22 to 75
<b>Connections</b>	Liquid (flare) - in.	1/4	1/4	1/4
	Gas (flare) - in.	3/8	3/8	1/2
	Maximum pipe length for all rooms - ft	66	66	98
	Maximum height difference between indoor and outdoor units - ft	49	49	66
<b>Refrigerant</b>	Charge furnished (R-32)	2 lbs. 2 oz.	2 lbs. 2 oz.	3 lbs. 2 oz.
<b>Compressor</b>	Type	BLDC Rotary	BLDC Rotary	BLDC Rotary
	Output (kW)	4.09	4.09	4.68
	Refrigerant oil type	POE	POE	POE
	Initial oil charge - oz	11.8	11.8	15.2
<b>Outdoor Fan</b>	Number and Type	1 Propeller	1 Propeller	1 Propeller
	cfm	1560	1560	2013
<b>Outdoor Fan Motor</b>	Type	BLDC	BLDC	BLDC
	Output (W)	40	40	125
<b>Outdoor Coil</b>	Type	Aluminum Fin/Copper Tube		
<b>Sound Data (dBA)</b>	Cooling	45	46	48
<b>Shipping Data</b>	Net	71	71	108
	Shipping	77	77	116
ELECTRICAL DATA				
<b>Line voltage data (Volts-Phase-Hz)</b>		208/230-1-60	208/230-1-60	208/230-1-60
	<sup>1</sup> Maximum Overcurrent Protection (MOCP) amps	20	20	25
	<sup>2</sup> Minimum circuit ampacity (MCA)	12	12	12

NOTE - Extremes of operating range are plus and minus 10% of line voltage.

<sup>1</sup> HACR type circuit breaker or fuse.

<sup>2</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

**SPECIFICATIONS**
**018-024**

Model		MWLD018S6S	MWLD024S6S
<b>Tons</b>		1.5	2
<b>Ambient Temperature Range - °F</b>	Cooling	0 to 115	0 to 115
	Heating	-22 to 75	-22 to 75
<b>Connections</b>	Liquid (flare) - in.	1/4	1/4
	Gas (flare) - in.	1/2	5/8
	Maximum pipe length for all rooms - ft	98	98
	Maximum height difference between indoor and outdoor units - ft	66	66
<b>Refrigerant</b>	Charge furnished (R-32)	4 lbs. 8 oz.	4 lbs. 8 oz.
<b>Compressor</b>	Type	BLDC Rotary	BLDC Rotary
	Output (kW)	8.02	8.02
	Refrigerant oil type	POE	POE
	Initial oil charge - oz	23.7	23.7
<b>Outdoor Fan</b>	Number and Type	1 Propeller	1 Propeller
	cfm	2825	2825
<b>Outdoor Fan Motor</b>	Type	BLDC	BLDC
	Output (W)	125	125
<b>Outdoor Coil</b>	Type	Aluminum Fin/Copper Tube	
<b>Sound Data (dBA)</b>	Cooling	51	54
<b>Shipping Data</b>	Net	150	150
	Shipping	162	162
<b>ELECTRICAL DATA</b>			
<b>Line voltage data (Volts-Phase-Hz)</b>		208/230-1-60	208/230-1-60
<sup>1</sup> Maximum Overcurrent Protection (MOCP) amps		30	30
<sup>2</sup> Minimum circuit ampacity (MCA)		20	20

NOTE - Extremes of operating range are plus and minus 10% of line voltage.

<sup>1</sup> HACR type circuit breaker or fuse.

<sup>2</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

**OPTIONAL ACCESSORIES - ORDER SEPARATELY**

Description	Order Number	Size				
		009	012	015	018	024
<b>OUTDOOR UNIT</b>						
Line Sets	1/4 x 3/8   3/8   25 ft.	<b>90X53</b>	•	•		
Liquid x Gas OD   Insulation Thickness   Length	1/4 x 3/8   3/8   50 ft.	<b>X0258</b>	•	•		
	1/4 x 1/2   3/8   25 ft.	<b>90X52</b>			•	•
	1/4 x 1/2   3/8   50 ft.	<b>X0259</b>			•	•
	1/4 x 5/8   3/8   25 ft.	<b>90X51</b>				•
	1/4 x 5/8   3/8   50 ft.	<b>X0260</b>				•
Hail Guards	Side	<b>38U95</b>	•	•		
	Back	<b>38U89</b>	•	•		
	Side	<b>38U96</b>			•	
	Back	<b>38U90</b>			•	
	Side	<b>38U97</b>				•
	Back	<b>38U91</b>				•
Wind Baffles	Front	<b>38V18</b>	•	•		
	Back	<b>38V12</b>	•	•		
	Front	<b>38V20</b>			•	
	Back	<b>38V14</b>			•	
	Front	<b>38V17</b>				•
	Back	<b>38V11</b>				•
Equipment Pads	18 x 38 x 3 in. direct mount, gray plastic	<b>Y5014</b>	•	•	•	•
	24 x 48 x 3 in. black	<b>28V63</b>	•	•	•	•
Equipment Stands	12 in. height, adjustable 34 to 40 in. white	<b>Y8240</b>	•	•	•	•
	18 in. height, adjustable 34 to 40 in. white	<b>Y8236</b>	•	•	•	•
	10 in. height, 24 x 36 in. gray	<b>Y8397</b>	•	•	•	•
	18 in. height, 30 x 40 in. gray	<b>28U18</b>	•	•	•	•
Wall Brackets	Wall unit installation support tool	<b>Y6999</b>	•	•	•	•
	30 x 16 in. (D x H) gray (qty 2)	<b>X1727</b>	•	•	•	•
25 x 18-3/8 in. (D x H), adjustable width 6 to 34 in. SS, wind/hurricane rated		<b>Y8239</b>	•	•	•	N/A
Control Wiring	Five conductor cable, 250 ft. (14/3, 16/2)	<b>29F41</b>	•	•	•	•
	Weather-tight cable connector (qty 1)	<b>29F45</b>	•	•	•	•
Disconnects	30A Pull-out Fusible	<b>Y9684</b>	•	•	•	•
	60A Pull-out Fusible	<b>Y9685</b>	•	•	•	•
	60A Pull-out Non-Fusible	<b>Y9686</b>	•	•	•	•
Whips	Metal Fittings 1/2 in. x 6 ft., 10 AWG	<b>29P54</b>	•	•	•	•
	Metal Fittings 3/4 in. x 6 ft., 8 AWG	<b>27P44</b>	•	•	•	•
	Plastic Fittings 1/2 in. x 6 ft., 10 AWG	<b>36P48</b>	•	•	•	•
	Plastic Fittings 3/4 in. x 6 ft., 8 AWG	<b>46N89</b>	•	•	•	•
<b>SPEEDICHANNEL™ SYSTEM</b>						
SpeediChannel™ Starter Kit - 4 in.		<b>Y7950</b>	•	•	•	•
SpeediChannel - 4 in. x 6-1/2 ft. (qty. 6)		<b>Y3388</b>	•	•	•	•
Union Coupling - 4 in.		<b>Y3389</b>	•	•	•	•
90° Flat Bend Elbow - 4 in.		<b>Y3390</b>	•	•	•	•
90° Inside Elbow - 4 in.		<b>Y3391</b>	•	•	•	•
90° Outside Elbow - 4 in.		<b>Y6074</b>	•	•	•	•
45° Flat Bend Elbow - 4 in.		<b>Y3392</b>	•	•	•	•
Flex Joint - 4 in.		<b>Y3393</b>	•	•	•	•
T-Joint - 4 in.		<b>Y3394</b>	•	•	•	•
Duct End - 4 in.		<b>Y3395</b>	•	•	•	•
Flat Wall Escutcheon - 4 in.		<b>Y3396</b>	•	•	•	•
Wall Penetration Cover - 4 in.		<b>Y3399</b>	•	•	•	•
Mount Block (White) Qty, 2 - 14 in.		<b>Y3397</b>	•	•	•	•
Mount Block (White) Qty, 2 - 36 in.		<b>Y3398</b>	•	•	•	•

## AHRI SYSTEM MATCHES

Outdoor Unit	Indoor Unit	Cooling Capacity	SEER2	EER2	Heating Capacity	HSPF2 (IV)	AHRI Reference Number	Energy Star Certified?
MWLD009S6S-1P	MWMD009S6-1P	9,000	25.0	16.35	11,000	10.5	216411305	Yes
MWLD012S6S-1P	MWMD012S6-1P	12,000	24.0	14.10	12,000	10.5	216411306	Yes
MWLD015S6S-1P	MWMD015S6-1P	15,000	23.0	14.55	15,000	11.0	216411307	Yes
MWLD018S6S-1P	MWMD018S6-1P	18,500	21.0	13.20	20,000	9.7	216411308	Yes
MWLD024S6S-1P	MWMD024S6-1P	22,000	20.0	12.80	25,000	9.5	216411309	Yes

Ratings are AHRI certified to AHRI Standard 210/240-2023;

- Cooling Ratings - 95°F wet bulb/75°F dry bulb outdoor air temperature and 80°F dry bulb/67°F wet bulb entering indoor coil air.
- High Temperature Heating Ratings - 47°F dry bulb/43°F wet bulb outdoor air temperature and 70°F dry bulb/60°F wet bulb entering indoor coil air.
- Low Temperature Heating Ratings - 17°F dry bulb/15°F wet bulb outdoor air temperature and 70°F dry bulb/60°F wet bulb entering indoor coil air.

To convert HSPF from Region IV to Region V - Divide by 1.15.

## COOLING CAPACITY

MWLD009S6S + MWMD009S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)																							
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72			90 / 75		
	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW
-0.4	10.9	8.8	0.5	10.5	8.4	0.5	10.5	8.4	0.6	11.1	8.9	0.7	11.6	9.3	0.7	12.0	9.6	0.7	13.0	10.4	0.8	14.0	11.2	0.7
32	11.2	9.0	0.4	10.9	8.7	0.4	11.0	8.8	0.5	11.6	9.3	0.6	12.2	9.7	0.6	12.6	10.1	0.6	13.6	10.9	0.6	14.7	11.7	0.6
50	11.6	9.3	0.3	11.2	9.0	0.4	11.3	9.1	0.5	12.0	9.6	0.6	12.6	10.0	0.6	13.0	10.4	0.6	14.0	11.2	0.6	15.1	12.0	0.6
68	11.7	9.4	0.4	11.4	9.1	0.4	11.5	9.2	0.5	12.1	9.7	0.6	12.7	10.1	0.7	13.1	10.5	0.7	14.1	11.3	0.7	15.1	12.1	0.6
85	11.4	9.2	0.4	11.1	8.9	0.5	11.2	8.9	0.6	11.8	9.4	0.7	12.3	9.8	0.8	12.7	10.2	0.8	13.7	10.9	0.8	14.7	11.7	0.8
95	11.0	8.8	0.5	10.6	8.5	0.6	10.7	8.5	0.7	11.2	9.0	0.8	9.0	7.2	0.6	12.2	9.8	0.9	13.1	10.5	0.9	14.1	11.3	0.9
104	10.4	8.3	0.6	10.0	8.0	0.7	10.0	8.0	0.8	10.6	8.4	0.9	11.1	8.9	1.0	11.5	9.2	1.0	12.3	9.9	1.0	13.3	10.6	1.0
110	9.8	7.9	0.7	9.4	7.5	0.8	9.5	7.6	0.9	10.0	8.0	1.0	10.4	8.4	1.1	10.8	8.7	1.1	11.7	9.4	1.1	12.6	10.1	1.1
115	9.3	7.5	0.7	8.9	7.1	0.8	8.9	7.1	1.0	9.4	7.5	1.1	9.8	7.9	1.2	10.2	8.2	1.2	11.1	8.9	1.2	11.9	9.6	1.2

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

## HEATING CAPACITY

MWLD009S6S + MWMD009S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb)											
	60		64		68		70		72		75	
	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
-22	6.8	1.1	6.7	1.1	6.6	1.1	6.6	1.2	6.5	1.2	6.5	1.4
-5	11.5	1.7	11.4	1.6	11.3	1.6	11.2	1.7	11.1	1.8	11.0	2.0
-4	11.7	1.7	11.6	1.6	11.5	1.7	11.4	1.7	11.3	1.8	11.2	2.0
0	12.4	1.7	12.3	1.7	12.2	1.7	12.1	1.8	12.0	1.9	11.8	2.0
5	13.2	1.8	13.1	1.7	13.0	1.8	12.9	1.8	12.8	1.9	12.5	2.1
14	14.2	1.8	14.2	1.7	14.0	1.8	13.9	1.8	13.7	1.9	13.4	2.1
23	14.9	1.7	14.8	1.7	14.6	1.7	14.5	1.8	14.3	1.9	14.0	2.0
32	15.4	1.6	15.3	1.6	15.0	1.6	14.9	1.7	14.6	1.8	14.2	1.9
41	15.7	1.4	15.6	1.4	15.3	1.5	15.1	1.5	14.9	1.6	14.4	1.8
47	15.9	1.3	15.8	1.3	15.5	1.4	11.0	0.7	15.0	1.5	14.5	1.7
55	16.2	1.2	16.1	1.2	15.8	1.3	15.5	1.3	15.2	1.4	14.6	1.5
65	16.9	1.1	16.7	1.1	16.4	1.2	16.1	1.2	15.7	1.3	15.0	1.4
75	17.9	1.0	17.8	1.0	17.3	1.1	17.0	1.2	16.6	1.2	15.8	1.3

TC = Total Capacity

PI - Power Input

## COOLING CAPACITY

## MWLD012S6S + MWMD012S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)																							
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72			90 / 75		
	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW
-0.4	11.5	9.4	0.5	11.7	9.3	0.6	12.0	9.5	0.7	12.5	9.9	0.8	12.9	10.3	0.9	13.3	10.6	0.9	14.2	11.4	0.9	15.5	12.4	0.9
32	11.1	9.1	0.3	11.4	9.1	0.5	11.7	9.3	0.6	12.3	9.8	0.7	12.8	10.3	0.7	13.2	10.6	0.7	14.2	11.4	0.7	15.6	12.4	0.7
50	11.8	9.7	0.3	12.2	9.7	0.5	12.5	9.9	0.6	13.1	10.5	0.7	13.6	10.9	0.7	14.1	11.3	0.7	15.1	12.1	0.7	16.4	13.1	0.7
68	12.6	10.3	0.4	12.9	10.3	0.6	13.2	10.5	0.7	13.9	11.0	0.8	14.4	11.5	0.9	14.8	11.8	0.9	15.8	12.7	0.9	17.1	13.7	0.8
85	12.7	10.4	0.5	13.0	10.4	0.7	13.4	10.6	0.9	14.0	11.1	1.0	14.4	11.6	1.1	14.8	11.9	1.1	15.8	12.7	1.1	17.2	13.7	1.1
95	12.4	10.1	0.6	12.7	10.1	0.9	13.0	10.3	1.0	13.6	10.8	1.2	12.0	9.6	0.9	14.4	11.6	1.2	15.4	12.4	1.2	16.7	13.4	1.2
104	11.7	9.6	0.7	12.0	9.6	1.0	12.3	9.7	1.2	12.8	10.2	1.3	13.3	10.6	1.4	13.7	10.9	1.4	14.6	11.7	1.4	15.9	12.7	1.4
110	11.0	9.0	0.8	11.3	9.0	1.1	11.6	9.2	1.3	12.1	9.6	1.4	12.5	10.0	1.5	12.9	10.3	1.5	13.8	11.1	1.5	15.1	12.1	1.5
115	10.3	8.4	0.9	10.5	8.4	1.1	10.8	8.6	1.3	11.3	9.0	1.5	11.7	9.4	1.6	12.1	9.7	1.6	13.0	10.5	1.6	14.3	11.4	1.6

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

## HEATING CAPACITY

## MWLD012S6S + MWMD012S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb)											
	61		64		68		70		72		75	
	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
-22	6.7	1.2	6.3	1.1	6.2	1.1	6.2	1.2	6.3	1.3	6.4	1.5
-5	12.8	1.9	12.6	1.8	12.4	1.8	12.3	1.9	12.2	2.0	12.0	2.2
-4	13.1	1.9	12.8	1.8	12.6	1.9	12.5	1.9	12.4	2.0	12.2	2.2
0	14.0	2.0	13.8	1.9	13.6	2.0	13.5	2.0	13.3	2.1	13.0	2.3
5	14.9	2.0	14.8	2.0	14.6	2.0	14.4	2.1	14.2	2.2	13.9	2.4
14	16.1	2.0	16.1	2.0	15.8	2.0	15.7	2.1	15.4	2.2	15.0	2.4
23	16.7	1.9	16.8	1.9	16.6	2.0	16.4	2.0	16.1	2.1	15.5	2.3
32	16.9	1.8	17.1	1.8	16.9	1.8	16.7	1.9	16.4	2.0	15.7	2.2
41	16.7	1.6	17.1	1.6	17.0	1.7	16.8	1.7	16.4	1.8	15.6	2.0
47	16.5	1.5	17.0	1.5	17.0	1.5	12.0	0.8	16.4	1.7	15.5	1.8
55	16.2	1.3	16.8	1.3	16.9	1.4	16.7	1.4	16.3	1.5	15.4	1.7
65	15.8	1.1	16.7	1.1	16.9	1.2	16.7	1.3	16.3	1.3	15.3	1.5
75	15.7	1.0	16.8	1.1	17.1	1.1	16.9	1.2	16.5	1.2	15.5	1.3

TC = Total Capacity

PI - Power Input

## COOLING CAPACITY

## MWLD015S6S + MWMD015S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)																							
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72			90 / 75		
	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW
-0.4	13.1	11.3	0.9	14.4	11.4	0.9	15.3	12.0	0.9	16.7	12.5	1.0	17.3	13.3	1.0	18.1	12.9	1.0	19.2	13.3	1.0	20.4	13.3	1.0
32	13.5	11.7	0.9	14.8	11.8	0.9	15.8	12.4	0.9	17.2	12.9	0.9	17.8	13.7	1.0	18.7	13.3	1.0	19.8	13.7	1.0	21.0	13.8	1.0
50	13.9	11.8	0.8	15.1	11.9	0.8	16.1	12.5	0.9	17.6	12.9	0.9	18.2	13.7	0.9	19.0	13.3	0.9	20.1	13.7	0.9	21.3	13.7	0.9
68	14.3	11.9	0.8	15.4	12.0	0.8	16.5	12.5	0.8	17.9	12.9	0.8	18.6	13.7	0.9	19.3	13.3	0.9	20.4	13.6	0.9	21.5	13.6	0.9
85	15.7	13.0	1.4	17.1	13.1	1.5	18.3	13.7	1.5	20.0	14.2	1.5	20.8	15.1	1.5	21.6	14.7	1.5	22.9	15.0	1.6	24.3	15.1	1.6
95	16.7	13.7	1.9	18.3	13.8	1.9	19.6	14.5	1.9	21.4	15.0	2.0	15.0	12.0	1.0	23.2	15.6	2.0	24.6	16.0	2.0	26.0	16.0	2.0
104	15.5	12.7	2.1	17.0	12.9	2.1	18.2	13.5	2.1	19.9	14.0	2.2	20.6	14.8	2.2	21.5	14.5	2.2	22.8	14.9	2.2	24.2	14.9	2.2
110	14.8	12.1	2.2	16.1	12.2	2.2	17.3	12.8	2.2	18.9	13.3	2.3	19.6	14.1	2.3	20.4	13.7	2.3	21.7	14.1	2.4	23.0	14.2	2.4
115	15.2	12.2	0.6	16.2	12.2	0.7	17.4	12.7	0.7	18.8	13.0	0.7	19.7	13.9	0.7	20.2	13.3	0.7	21.3	13.6	0.8	22.2	13.4	0.8

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

## HEATING CAPACITY

## MWLD015S6S + MWMD015S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb)											
	61		64		68		70		72		75	
	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
-22	7.8	1.6	7.7	1.7	7.6	1.7	7.5	1.7	7.5	1.7	7.4	1.7
-5	16.1	2.1	15.8	2.2	15.6	2.2	15.5	2.2	15.5	2.2	15.2	2.3
-4	16.6	2.2	16.3	2.2	16.1	2.2	15.9	2.2	15.9	2.3	15.7	2.3
0	17.8	2.2	17.5	2.3	17.3	2.3	17.1	2.3	17.1	2.4	16.9	2.4
5	19.3	2.4	19.1	2.4	18.8	2.4	18.6	2.5	18.6	2.5	18.3	2.5
14	21.0	2.3	20.7	2.4	20.4	2.4	20.2	2.4	20.2	2.5	19.9	2.5
23	22.8	2.3	22.4	2.4	22.1	2.4	21.9	2.4	21.7	2.5	21.5	2.5
32	24.5	2.3	24.1	2.4	23.7	2.4	23.5	2.4	23.3	2.4	23.0	2.5
41	25.2	2.2	24.8	2.3	24.4	2.3	24.2	2.3	24.0	2.3	23.7	2.4
47	25.7	2.2	25.3	2.2	24.9	2.2	15.0	1.0	24.5	2.3	24.2	2.3
55	26.4	2.1	25.9	2.1	25.5	2.2	25.3	2.2	25.1	2.2	24.8	2.2
65	27.2	2.0	26.8	2.0	26.3	2.0	26.1	2.1	25.9	2.1	25.6	2.1
75	28.0	1.9	27.6	1.9	27.1	1.9	26.9	1.9	26.7	2.0	26.3	2.0

TC = Total Capacity

PI - Power Input

## COOLING CAPACITY

## MWLD018S6S + MWMD018S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)																							
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72			90 / 75		
	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW
-0.4	19.2	16.3	1.3	21.0	16.5	1.3	22.4	17.3	1.4	24.4	18.0	1.4	25.2	19.1	1.5	26.5	18.6	1.4	28.1	19.1	1.5	29.8	19.2	1.5
32	19.5	16.5	1.3	21.3	16.7	1.3	22.7	17.6	1.3	24.8	18.2	1.4	25.6	19.4	1.5	26.9	18.9	1.4	28.5	19.4	1.5	30.2	19.5	1.4
50	19.7	16.4	1.2	21.4	16.5	1.2	22.9	17.3	1.3	24.9	17.9	1.3	25.8	19.0	1.4	26.9	18.5	1.4	28.4	18.9	1.4	30.0	18.9	1.4
68	19.3	15.9	1.3	20.9	16.0	1.3	22.3	16.7	1.4	24.3	17.2	1.4	25.2	18.3	1.5	26.2	17.8	1.5	27.7	18.2	1.5	29.2	18.1	1.5
85	18.4	15.0	1.7	20.1	15.1	1.7	21.4	15.8	1.7	23.4	16.4	1.8	24.3	17.4	1.8	25.3	16.9	1.8	26.8	17.4	1.8	28.3	17.4	1.8
95	17.9	14.5	1.9	19.6	14.6	1.9	21.0	15.3	1.9	22.9	15.9	2.0	18.0	14.4	1.4	24.8	16.5	2.0	26.3	16.9	2.0	27.9	16.9	2.0
104	16.0	12.9	2.1	17.4	13.0	2.2	18.7	13.7	2.2	20.4	14.2	2.2	21.2	15.0	2.3	22.1	14.7	2.3	23.5	15.0	2.3	24.9	15.1	2.3
110	14.7	11.8	2.3	16.0	12.0	2.3	17.2	12.6	2.4	18.7	13.0	2.4	19.4	13.8	2.4	20.3	13.5	2.5	21.6	13.8	2.5	22.8	13.9	2.5
115	13.6	11.0	2.4	14.9	11.1	2.5	15.9	11.7	2.5	17.4	12.1	2.6	18.1	12.8	2.6	18.9	12.5	2.6	20.1	12.9	2.6	21.2	12.9	2.7

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

## HEATING CAPACITY

## MWLD018S6S + MWMD018S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb)											
	61		64		68		70		72		75	
	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
-22	11.6	2.3	11.4	2.4	11.2	2.4	11.1	2.4	11.1	2.5	11.0	2.5
-5	20.6	3.2	20.3	3.3	20.0	3.3	19.8	3.4	19.8	3.4	19.5	3.4
-4	21.1	3.3	20.8	3.3	20.5	3.4	20.3	3.4	20.3	3.4	20.0	3.5
0	21.6	3.4	21.3	3.5	21.0	3.5	20.8	3.5	20.8	3.6	20.5	3.6
5	22.3	3.6	22.0	3.6	21.7	3.7	21.4	3.7	21.5	3.7	21.1	3.8
14	24.4	3.6	24.0	3.6	23.6	3.7	23.4	3.7	23.3	3.8	23.0	3.8
23	26.4	3.6	26.0	3.6	25.6	3.7	25.4	3.7	25.2	3.8	24.9	3.8
32	26.8	3.2	26.4	3.3	25.9	3.3	25.7	3.4	25.5	3.4	25.2	3.4
41	26.8	2.8	26.4	2.8	25.9	2.9	25.7	2.9	25.5	2.9	25.2	3.0
47	26.9	2.6	26.4	2.7	26.0	2.7	20.0	1.5	25.6	2.8	25.3	2.8
55	27.1	2.6	26.7	2.6	26.3	2.7	26.1	2.7	25.8	2.7	25.5	2.8
65	27.5	2.6	27.0	2.6	26.6	2.7	26.4	2.7	26.1	2.7	25.8	2.8
75	27.8	2.6	27.4	2.6	26.9	2.7	26.7	2.7	26.5	2.7	26.1	2.7

TC = Total Capacity

PI - Power Input

## COOLING CAPACITY

## MWLD024S6S + MWMD024S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)																							
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72			90 / 75		
	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW	TC MBH	SHC MBH	PI kW
-0.4	20.1	16.1	1.4	22.0	16.3	1.4	23.5	17.1	1.4	25.6	17.8	1.5	26.4	18.9	1.6	27.8	18.4	1.5	29.4	18.9	1.6	31.2	19.0	1.6
32	20.5	16.4	1.3	22.4	16.6	1.3	23.9	17.4	1.4	26.1	18.1	1.4	26.9	19.2	1.5	28.2	18.7	1.5	30.0	19.2	1.5	31.8	19.3	1.5
50	20.5	16.0	1.3	22.2	16.2	1.3	23.7	17.0	1.4	25.8	17.5	1.4	26.8	18.6	1.5	27.9	18.1	1.4	29.5	18.5	1.5	31.2	18.5	1.5
68	20.2	15.7	1.3	21.9	15.8	1.4	23.4	16.5	1.4	25.4	17.0	1.5	26.4	18.1	1.6	27.4	17.5	1.5	28.9	17.9	1.6	30.5	17.9	1.6
85	20.8	16.0	2.3	22.7	16.1	2.3	24.3	16.9	2.4	26.4	17.5	2.4	27.5	18.6	2.5	28.6	18.1	2.5	30.3	18.5	2.5	32.1	18.5	2.6
95	21.3	16.2	2.9	23.3	16.4	3.0	24.9	17.2	3.0	27.2	17.8	3.1	22.0	17.6	1.7	29.5	18.5	3.1	31.3	19.0	3.2	33.2	19.0	3.2
104	18.4	14.1	2.8	20.1	14.2	2.8	21.6	14.9	2.9	23.5	15.4	2.9	24.4	16.4	3.0	25.5	16.0	3.0	27.1	16.4	3.0	28.7	16.4	3.1
110	16.5	12.6	2.7	18.1	12.7	2.8	19.3	13.4	2.8	21.1	13.9	2.9	21.9	14.7	2.9	22.9	14.3	2.9	24.3	14.7	2.9	25.8	14.8	3.0
115	15.0	11.5	2.7	16.4	11.6	2.7	17.6	12.1	2.8	19.2	12.6	2.8	19.9	13.3	2.8	20.8	13.0	2.8	22.1	13.4	2.9	23.4	13.4	2.9

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

## HEATING CAPACITY




## MWLD024S6S + MWMD024S6

Outdoor Temp. °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb)											
	61		64		68		70		72		75	
	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
-22	12.0	2.3	11.9	2.4	11.7	2.4	11.6	2.4	11.6	2.4	11.4	2.5
-5	23.7	4.0	23.3	4.1	23.0	4.1	22.7	4.2	22.8	4.2	22.4	4.2
-4	24.3	4.1	24.0	4.2	23.7	4.2	23.4	4.3	23.4	4.3	23.1	4.4
0	24.8	4.0	24.5	4.1	24.1	4.1	23.9	4.1	23.9	4.2	23.5	4.2
5	25.4	3.9	25.1	3.9	24.7	4.0	24.4	4.0	24.5	4.0	24.1	4.1
14	26.7	3.6	26.3	3.7	25.9	3.7	25.7	3.7	25.6	3.8	25.2	3.8
23	28.0	3.3	27.5	3.4	27.1	3.5	26.9	3.5	26.6	3.5	26.3	3.6
32	29.5	3.3	29.1	3.4	28.6	3.4	28.4	3.4	28.1	3.5	27.8	3.5
41	28.2	2.7	27.8	2.7	27.3	2.8	27.1	2.8	26.8	2.8	26.5	2.9
47	28.2	2.4	27.8	2.5	27.3	2.5	25.0	2.0	26.9	2.6	26.6	2.6
55	30.1	2.5	29.7	2.5	29.2	2.6	29.0	2.6	28.7	2.6	28.4	2.7
65	32.5	2.6	32.0	2.6	31.5	2.7	31.3	2.7	31.0	2.7	30.6	2.7
75	35.0	2.7	34.4	2.7	33.9	2.7	33.6	2.8	33.3	2.8	32.9	2.8


TC = Total Capacity

PI - Power Input


**MWLD009S6S | MWLD012S6S**

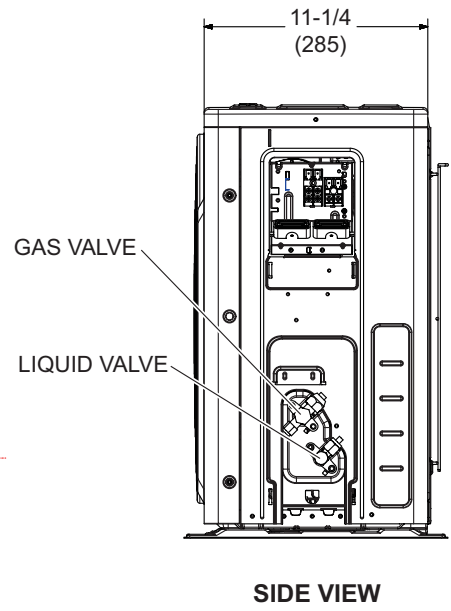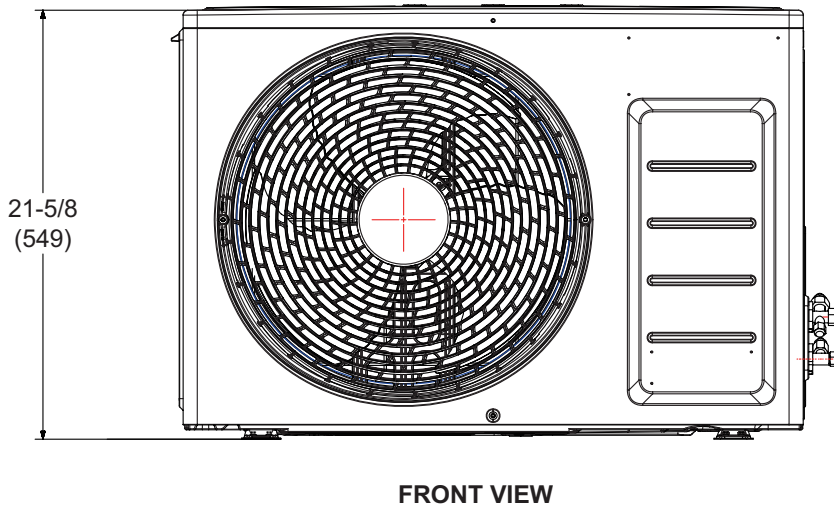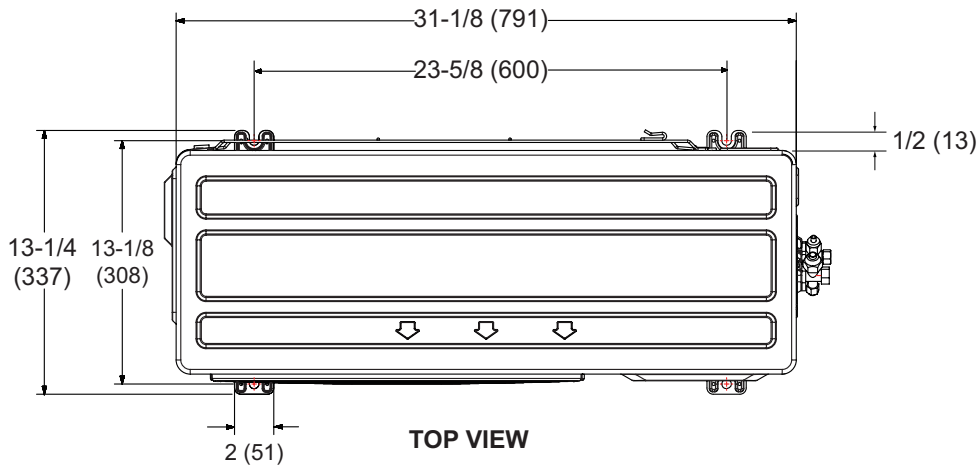


**MWLD015S6S**

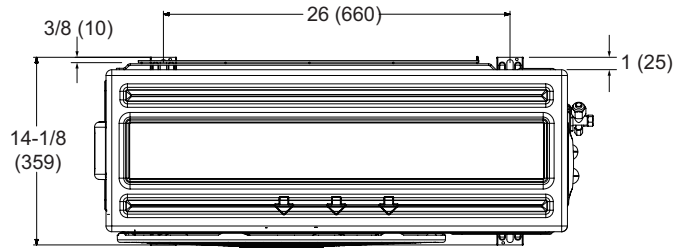


TOP VIEW

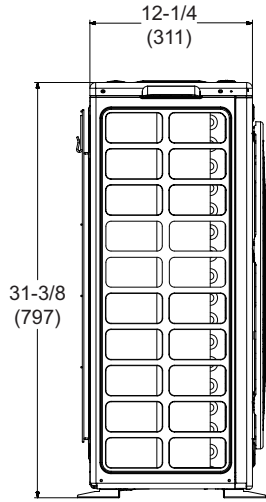


SIDE VIEW

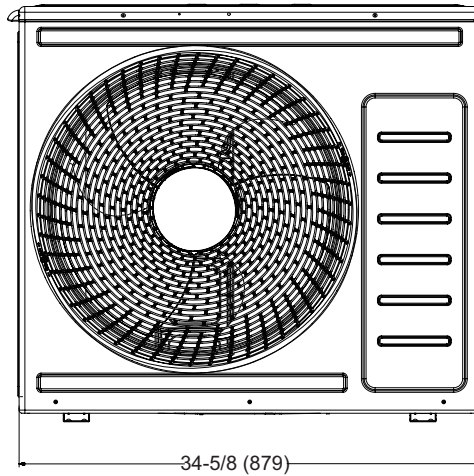

FRONT VIEW

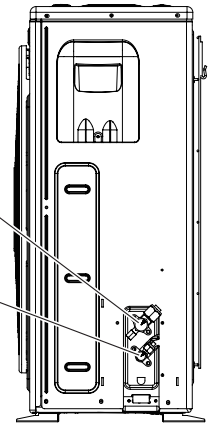


SIDE VIEW

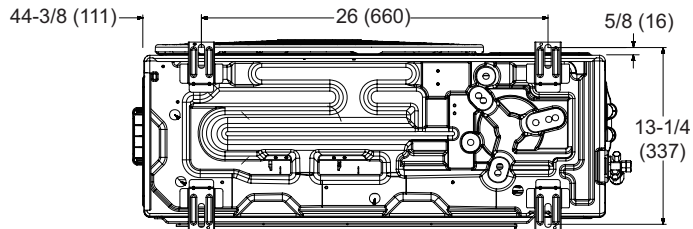


BOTTOM VIEW

**MWLD018S6S | MWLD024S6S**

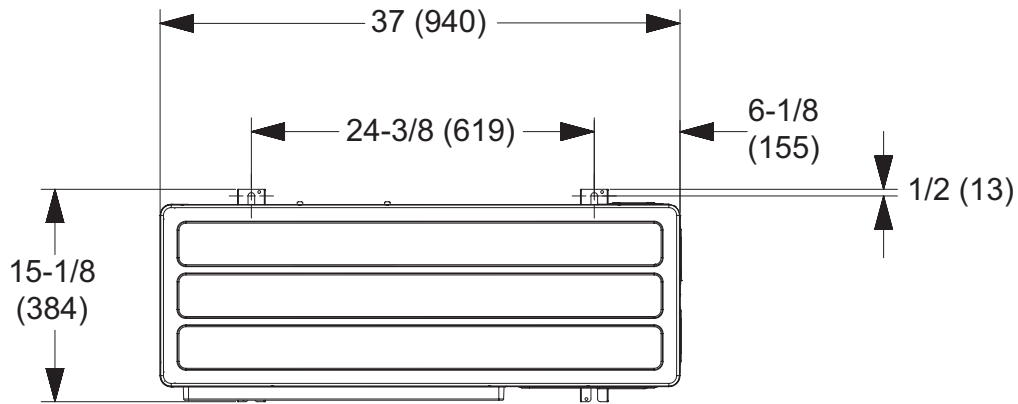

**TOP VIEW**

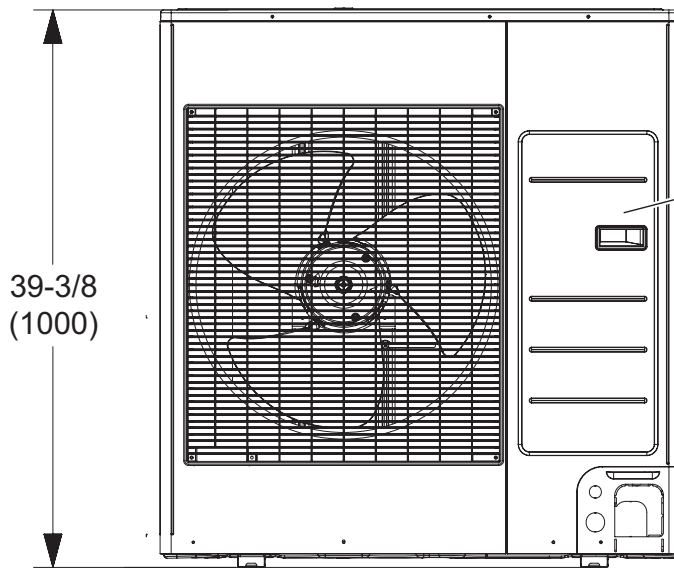


**FRONT VIEW**


LIQUID AND GAS VALVES (Under Cover)

LIQUID PIPE INLET

GAS PIPE INLET

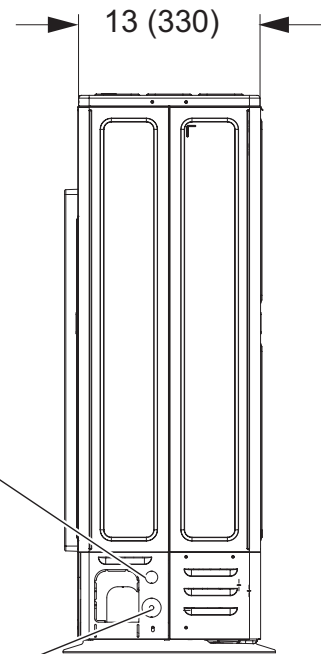


**SIDE VIEW**

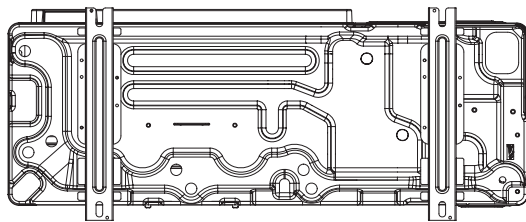


**BOTTOM VIEW (51)**


**MWLD009S6 | MWLD012S6, MWLD015S6**

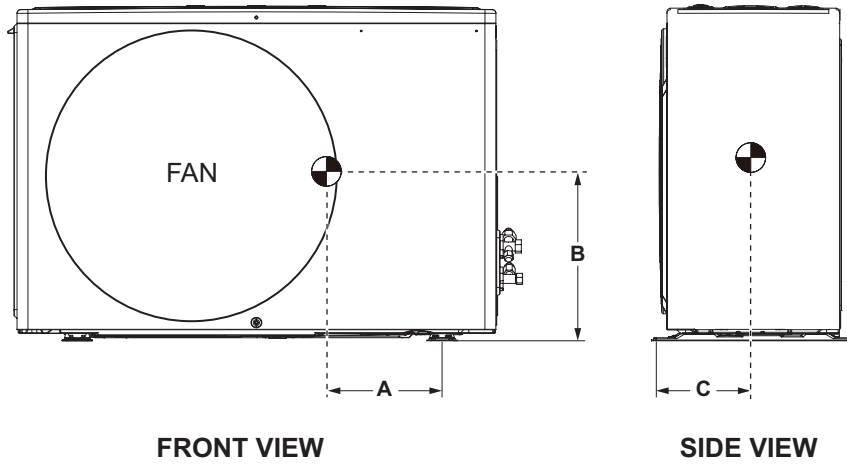


**MWLD018S6, MWLD024S6**

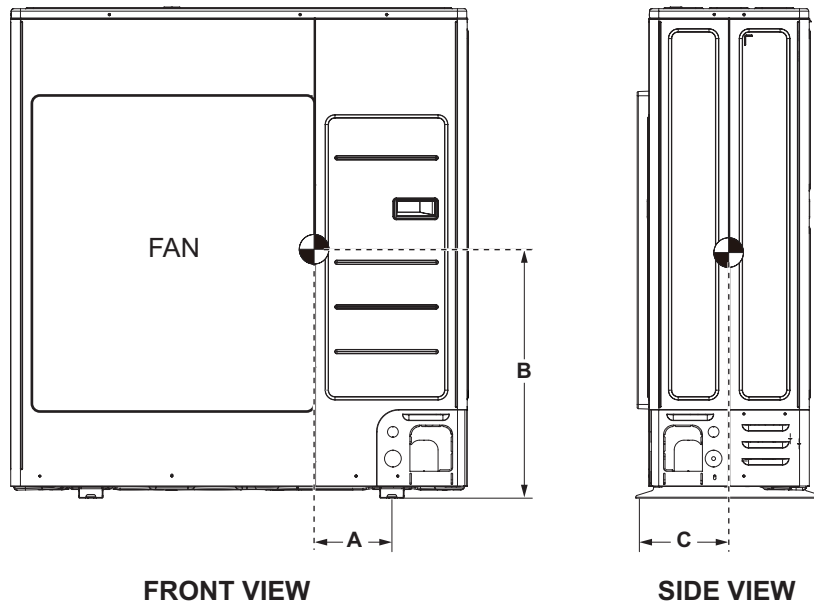


Dimensions	009		012		015		018		024	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
<b>A</b>	7-1/2	191	7-1/2	191	9-7/8	250	8-1/8	207	8-1/8	207
<b>B</b>	11	279	11	279	13-3/4	350	17-1/2	444	17-1/2	444
<b>C</b>	6-1/8	155	6-1/8	155	6-3/8	162	7	178	7	178

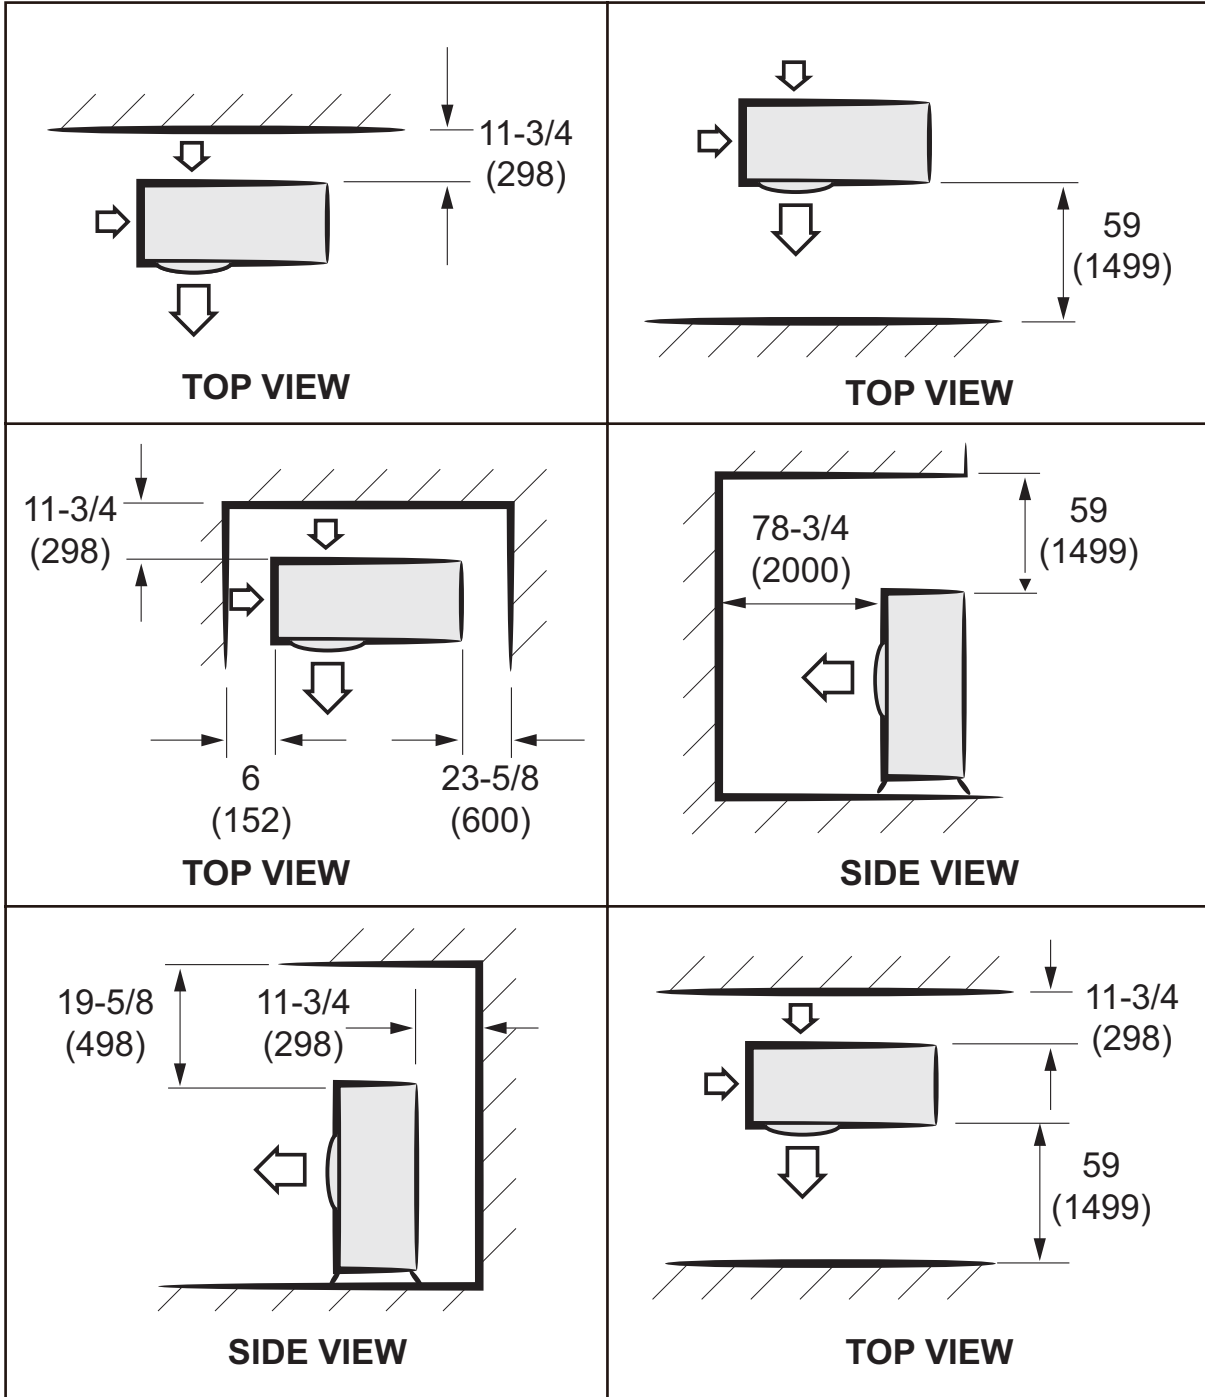

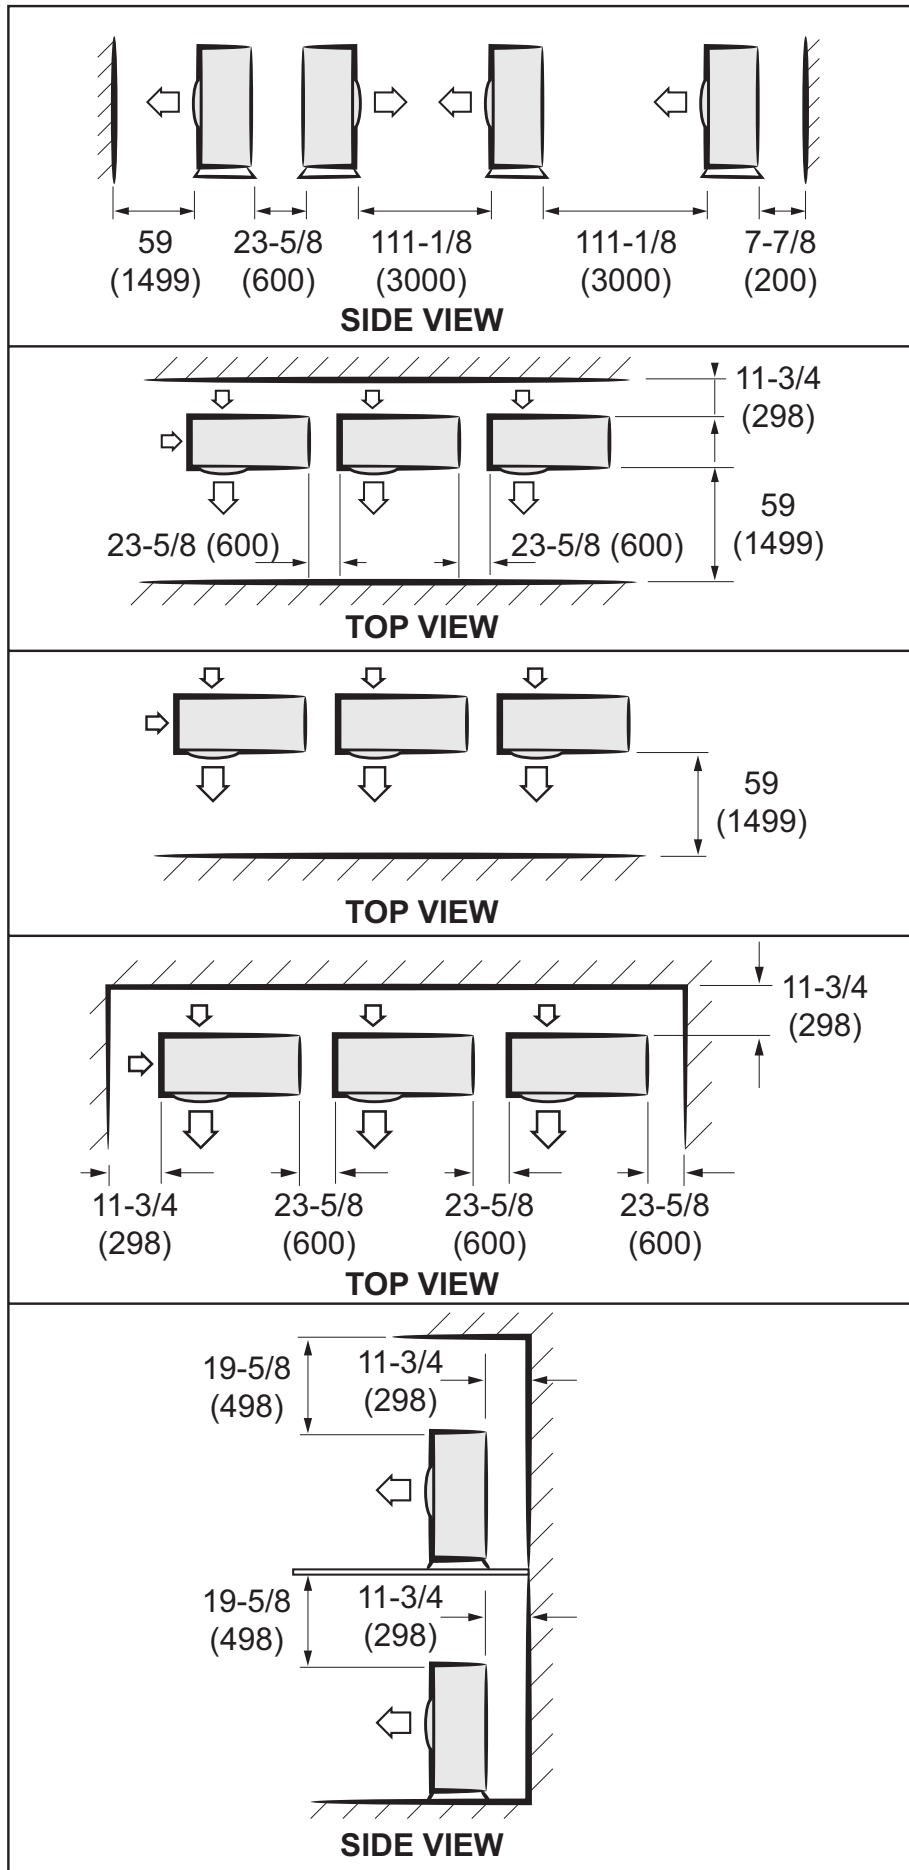

**Sound Pressure level**

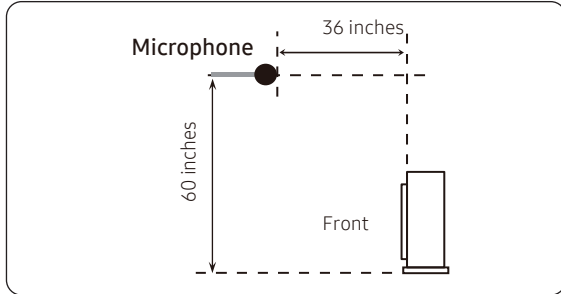


Unit: dBA


Model	Cooling
MWLD009S6S-1P	45
MWLD012S6S-1P	46
MWLD015S6S-1P	48
MWLD018S6S-1P	51
MWLD024S6S-1P	54

• **NC Curve**


1) MWLD009S6S-1P

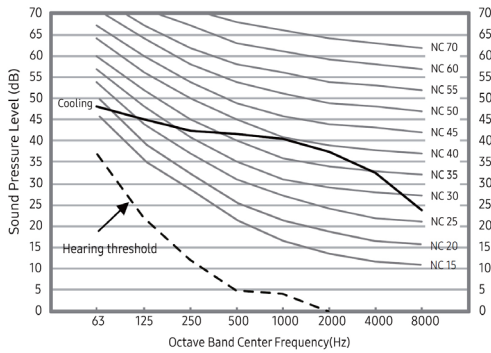


2) MWLD012S6S-1P

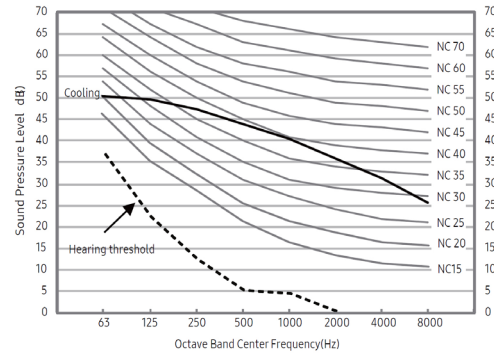


3) MWLD015S6S-1P

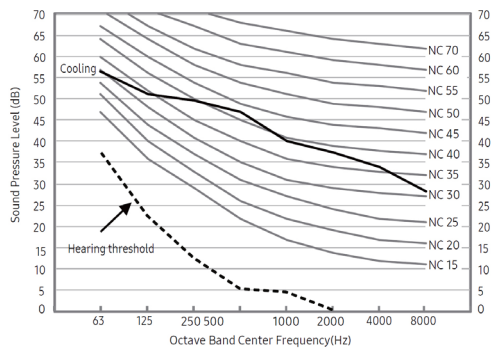

4) MWLD018S6S-1P

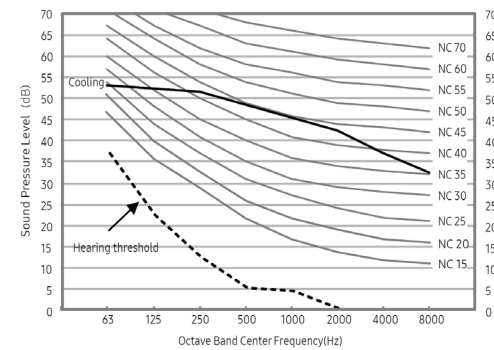

5) MWLD024S6S-1P

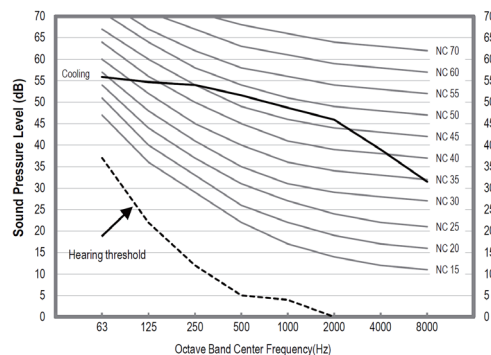


**NOTE**


- Specifications may be subject to change without prior notice.
- Sound pressure Level
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A weighted sound pressure level
  - Reference acoustic pressure 0 dB = 20µPa

# OPERATION RANGE

Cooling

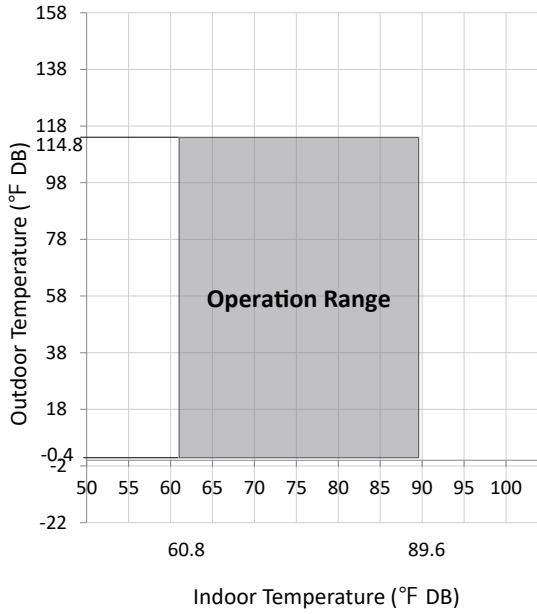

Heating

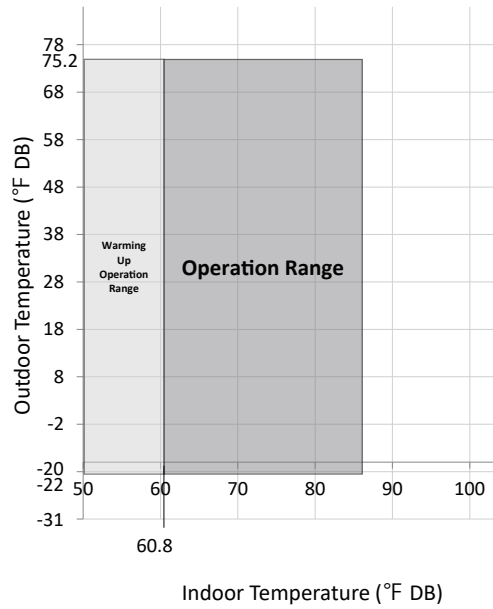

# CAPACITY CORRECTION

9/12KBtu/h

## Cooling

		Pipe Length (ft)					
		16	33	41	49	66	
	Level Difference (ft)	49	-	-	-	0.92	0.90
		33	-	0.95	0.94	0.93	0.91
		23	-	0.96	0.95	0.94	0.92
		16	0.99	0.97	0.96	0.95	0.93
		0	1.00	0.98	0.97	0.96	0.94
		-16	0.99	0.97	0.96	0.95	0.93
		-23	-	0.96	0.95	0.94	0.92
		-33	-	0.95	0.94	0.93	0.91
		-49	-	-	-	0.92	0.90

## Heating

		Pipe Length (ft)					
		16	33	41	49	66	
	Level Difference (ft)	49	-	-	-	0.92	0.90
		33	-	0.95	0.94	0.93	0.91
		26	-	0.96	0.95	0.94	0.92
		16	0.99	0.97	0.96	0.95	0.93
		0	1.00	0.98	0.97	0.96	0.94
		-16	0.99	0.97	0.96	0.95	0.93
		-26	-	0.96	0.95	0.94	0.92
		-33	-	0.95	0.94	0.93	0.91
		-49	-	-	-	0.92	0.90

# CAPACITY CORRECTION

15/18/24KBtu/h

## Cooling

		Pipe Length (ft)							
		16	33	41	49	66	82	98	
	Level Difference (ft)	66	-	-	-	-	-	0.87	0.85
		49	-	-	-	0.92	0.90	0.88	0.86
		33	-	0.95	0.94	0.93	0.91	0.89	0.87
		23	-	0.96	0.95	0.94	0.92	0.9	0.88
		16	0.99	0.97	0.96	0.95	0.93	0.91	0.89
		0	1.00	0.98	0.97	0.96	0.94	0.92	0.90
		-16	0.99	0.97	0.96	0.95	0.93	0.91	0.89
		-23	-	0.96	0.95	0.94	0.92	0.9	0.88
		-33	-	0.95	0.94	0.93	0.91	0.89	0.87
		-49	-	-	-	0.92	0.90	0.88	0.86
		-66	-	-	-	-	-	0.87	0.85

## Heating

		Pipe Length (ft)							
		16	33	41	49	66	82	98	
	Level Difference (ft)	66	-	-	-	-	-	0.87	0.85
		49	-	-	-	0.92	0.90	0.88	0.86
		33	-	0.95	0.94	0.93	0.91	0.89	0.87
		23	-	0.96	0.95	0.94	0.92	0.9	0.88
		16	0.99	0.97	0.96	0.95	0.93	0.91	0.89
		0	1.00	0.98	0.97	0.96	0.94	0.92	0.90
		-16	0.99	0.97	0.96	0.95	0.93	0.91	0.89
		-23	-	0.96	0.95	0.94	0.92	0.90	0.88
		-33	-	0.95	0.94	0.93	0.91	0.89	0.87
		-49	-	-	-	0.92	0.90	0.88	0.86
		-66	-	-	-	-	-	0.87	0.85

## REVISIONS

Sections	Description of Change
Optional Accessories	Updated available accessories.



Visit us at [www.Lennox.com](http://www.Lennox.com)

For the latest technical information, [www.LennoxPros.com](http://www.LennoxPros.com)

Contact us at 1-800-9-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2025 Lennox Industries, Inc.