



100%  
MADE IN ITALY



# LINDHAUS®

QUALITY CLEANING EQUIPMENT

PROFESSIONAL LINE



ECO FORCE

LINDHAUS®  
Activa 30 pro  
eco FORCE

Electronic Shut Off  
» Hospital Grade Filtration  
» Dry Cleaning System



## ACTIVA 30 pro eco FORCE



# Activa pro 30 eco FORCE

Single motor carpet cleaner for small surfaces



## STRENGTHS

- Ultra-light machine (1.63lb weight on handle)
- Ultra strong metal brush supports with ball bearings
- Accessories integrated on board
- Replacement filter bag on board
- Extremely stable
- Extremely low profile
- Integrated dry cleaning system
- Interchangeable roller covers for carpets and floors
- Telescopic handle for maximum comfort
- Very low energy consumption

**Activa pro eco FORCE**  
More than just a vacuum!



## CARPET CLEANER

Activa represents a new generation of the highest filtration vacuum/ dry carpet cleaning machine all in one.

This uniquely designed world class, single motor vacuum is light weight, and has two geared belts protected by a patented clutch system and an electronic overload control.

The lightest and quietest of its class, Activa is equipped with four wheels to smoothly follow the desired direction. The lowest possible barycentre allows the above the floor cleaning preventing the risk of failing off.

## EXTREMELY LOW PROFILE

The sleek low profile design and tool incorporated into the back housing, allows the machine to lie flat for easy access under furniture. It has interchangeable filtration option, 3M Filtrete (standard), optional carbon/active charcoal filter (to odors), or S-Class Hepa filtration.

## SILENT

You can count on the lowest possible sound level from the Activa, thanks to the superior engineering of all the components, and dynamic balancing of all rotating parts.

## BRUSH CHANGE

Nothing could be easier. No tools are required to change the brush roll or to clean the base housing. The patented clutch system and the electronic overload control protect the two cogged drive belts and the motor from overload or brush blockage.

## PATENTED DRY CLEANING SYSTEM


Converting the vacuum to a dry carpet cleaning system is simple as installing a special conveyor. No tools required!

For your convenience Lindhaus also offers many upholstery cleaners.



Activa is equipped with 6 stages of filtration. At the final stage an electrostatic microfilter (3M Filtrete) ensures more than 98% of filtration efficiency at 0.3 micron. You can install the optional filters S-Class Hepa for healthcare environments, which assures 99.96% of filtration efficiency at 0.3 micron. To trap offensive odors use the Lindhaus Carbon Active/Microfilters. All exhaust filters are impregnated with Total antiseptic treatment to avoid the outflow of living micro-organisms.

## NET EFFICIENCY FILTRATION

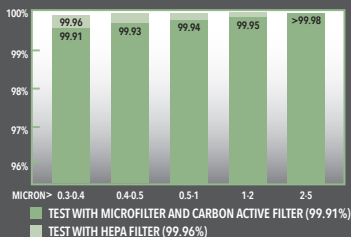

## ELECTRONIC PROTECTION

The electronic circuit permits you to correctly regulate the height of brush roll; it allows the motor to start softly while keeping it at constant speed. The motor will stop immediately should the brush roll get blocked-this will avoid damage to the cogged belt and all the moving parts.

## INTERCHANGEABLE BRUSH SHOE PLATE (optional)

Thanks to the interchangeable shoe plates Activa can be used also on hard floors:

- with squeegee and front wheels for common hard floors: ceramic, linoleum, etc.
- with felt for delicate floors: marble and wood



## TECHNICAL DATA

## Activa 30 pro

Working width - vacuum (mm/in)	303 / 12
Working width - brush (mm/in)	272 / 10.7
Working capacity apx. (sqm/h/sqf/h)	480 / 516.7
Filter bag capacity (2-ply paper bag-lt.)	4.5 / 0.99
Brush roller rotation speed (RPM)	5000
Base height (mm/in)	110 / 4.33
Weight on handle (Kg/lb)	0.74 / 1.63
Full set of tools on board	Standard
Voltage/Frequency (V/Hz)	220-240 / 50-60
Input power (W)	850
Energy consumption class	-
Power cord length (mt./feet)	10 / 32.8
Water-lift/vacuum (mm/H <sub>2</sub> O/in/H <sub>2</sub> O)	2000 / 79
Air flow (lt./sec./CFM)	49 / 103.8
3M Filtrete exhaust microfilter	Standard
Motor protection filter	Standard
HEPA filtration level at 0.3μ (H11-opt.)	99.96%
Vacuum motor protection	Electronic
Overload electronic control	Standard
Insulation class	II
Noise level (dba)	69
Total net weight (Kg/lb)	6.7 / 14.8
Dimensions (mm/in)	315x300x1180/12.4x11.8x46.5

APPROVALS:



### HEADQUARTERS • LINDHAUS SRL

Via Belgio, 22 Z.I. 35127 • Padova, ITALY  
tel. +39 0498700307 • fax +39 049 8700605  
vacuum@lindhaus.it • www.lindhaus.it

### LINDHAUS USA

Minneapolis • Minnesota USA  
info@lindhaus.com • www.lindhaus.com

DEALER STAMP