

HURFORD'S FLOORING RANGE




SOLID HARDWOOD FLOORING


A solid Hardwood Floor is an investment for a lifetime. It not only adds value to your home but makes a statement of timeless style all on its own.









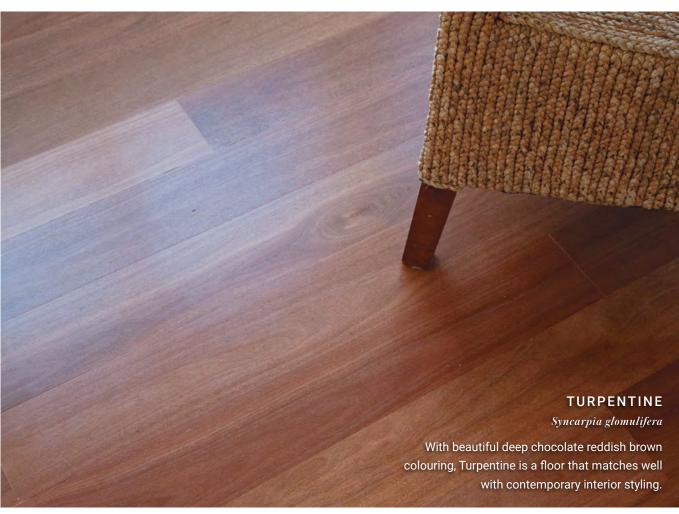


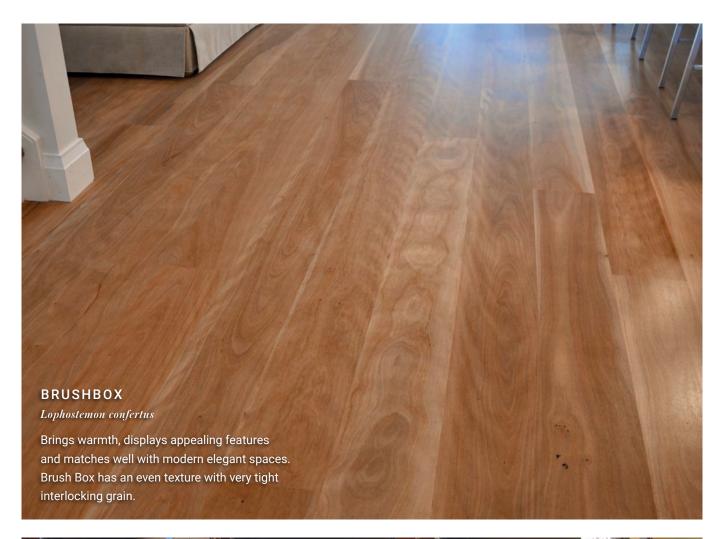



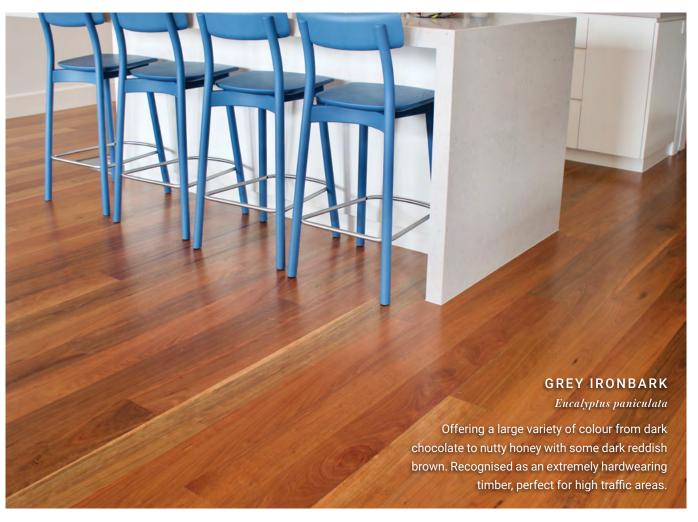


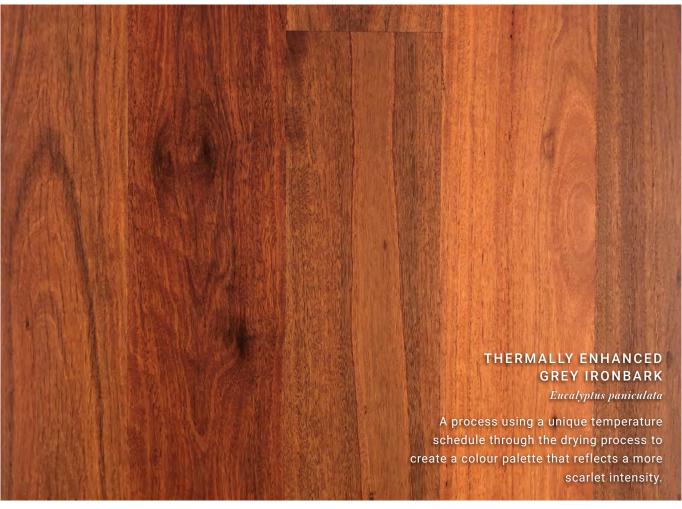

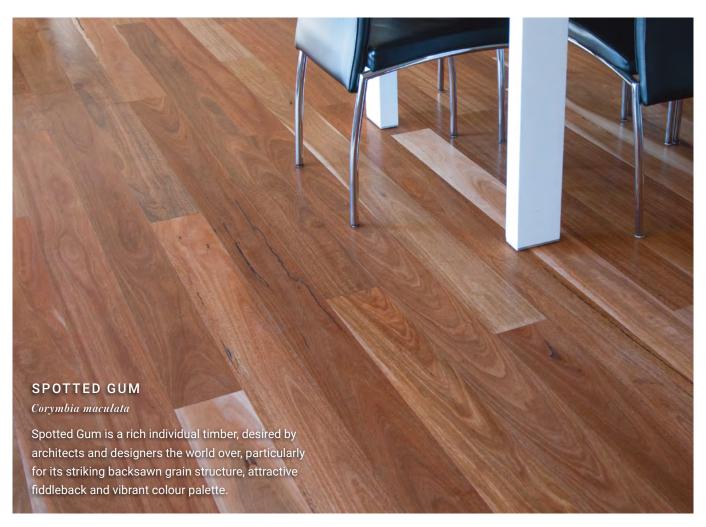







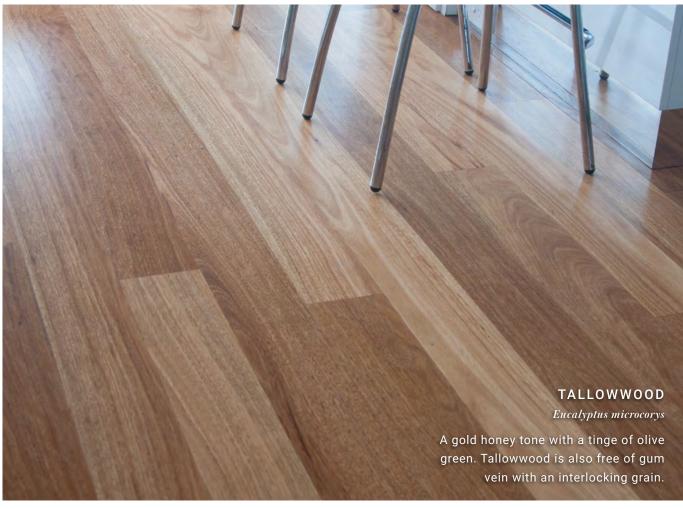



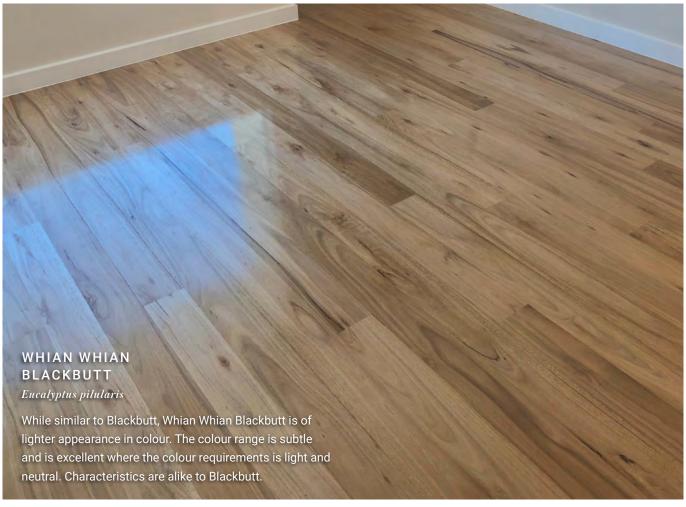



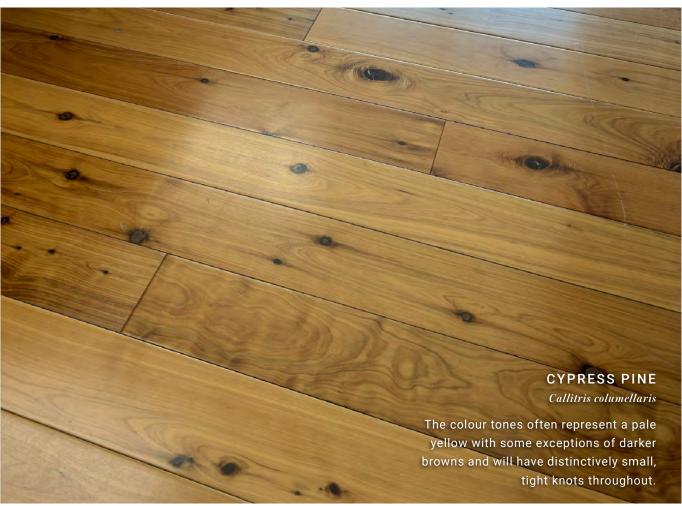





Solid Flooring Specifications

Species Product	Ultra10		Overlay		Four	teen	Fourteen+		Traditional		
Matrix	86 x 10mm	83 x 12mm	86 x 12mm	83 x 14mm	130 x 14mm	180 x 14mm	85 x 14mm	60 x 19mm	80 x 19mm	130 x 19mm	180 x 21mm
Blackbutt	0	0	0	0	0	0	0	0	0	0	0
Brush Box	0	0	0	0	0	0	0	0	0	0	0
Flood Gum/Rose Gum									0	0	
Grey Box	Available o	n request									
Grey Ironbark	0	0	0	0	0	0	0	0	0	0	0
Mixed Hardwood								0	0	0	
New England Blackbutt		0	0	0	0	0	0		0	0	0
Red Ironbark	0	0	0	0	0	0	0		0	0	0
Roasted Cayenne	0			0	○ 128 x 14mm	○ 178 x 14mm					
Roasted Peat	0			0	○ 128 x 14mm	○ 178 x 14mm					
Silvertop		0	0	0	0	0	0		0	0	0
Spotted Gum - NSW	0	0	0	0	0	0	0	0	0	0	0
Spotted Gum - QLD				0	0	0	0	0	0	0	0
Sydney Blue Gum	0	0	0	0	0	0	0	0	0	0	0
Tallowwood	0	0		0	0	0	0	0		0	0
Thermally Enhanced Grey Ironbark		0		0	0	0	0	0		0	0
Thermally Enhanced NSW Spotted Gum				0	0	0	0		0	0	0
Thermally Enhanced Sydney Blue Gum		0		0		0	0		0	0	0
Turpentine		0		0	0	0			0	0	0
Whian Whian Blackbutt									0	0	0
White Mahogany		0		0	0	0			0	0	0

Cypress Pine available in 62 x 20mm, 85 x 20mm, 98 x 20mm, 100 x 20mm, 108 x 20mm, 133 x 20mm


Please Note: Images are not always an accurate representation of the normal colour tones of a species. Please speak with your local Hurford's supplier for samples. If you do not know your closest Hurford's supplier or are unable to acquire your desired samples please email us at info@hurfordwholesale.com.au.




A contemporary take on a historic style...

For a standout and visually appealing designed floor, Hurford's XL Parquetry will give your home or commercial space a unique feature with the charm of historic style.

Single blocks are manufactured so they can be installed into endless parquetry patterns, popular patterns suggested are Herringbone, Brick Pattern and Square on Square. A selection of Australian native species are available for you to choose.







XL Parquetry Specifications

AL I diquetily op	Comcations
Species:	Blackbutt, Brush Box, Grey Ironbark, New England Blackbutt, Red Ironbark, Silvertop, Spotted Gum – NSW, Spotted Gum – QLD, Sydney Blue Gum, Thermally Enhanced Sydney Blue Gum, *Roasted Peat & Roasted Cayenne (Other species available on request)
Grade:	Prestige
Profile:	Secret Nail, Tongue & Groove, End Matched
Coating:	Uncoated (Sand and coat once installed)
Size:	130mm x 14mm *Roasted Peat & Roasted Cayenne 128 x 14mm (Different widths available on request)
Length:	650mm *Roasted Peat & Roasted Cayenne 640mm (Different lengths available on request)
Coverage:	1.014M²/box *Roasted Peat & Roasted Cayenne 0.983 M²/box
Packaging:	12 pieces per box – Left and Right Box
Install Over:	Wood, particle board, plywood & plywood over concrete



American Oak

American Oak is a popular species for flooring due to its interesting and pronounced grain pattern. American Oak is also a species that takes stain extremely well, meaning that a multitude of colours can be achieved with little fuss. Hurford's import raw American Oak feed stock, and the timber is re-dried, treated, machined and graded.

American Oak is grown predominantly on the East Coast of the United States. All the White Oak raw material that Hurford's source is from reputable sawmills that practice sustainable forestry.

Species	American Oak
Grade	Prestige or Rustic
Profile	Top Nail, Tongue & Groove (End Matched)
Size	130x19mm, 155x19mm, 180x21mm, 205x21mm & 220x21mm
Lengths	600mm – 4500mm
Colours	Golden honey browns, some boards can have hints of soft pink tones.



Nothing quite captures the romance of a beautiful hardwood floor, like genuine French Oak.

From the base in Vermelles, France, our own staff source sawn French Oak boards from boutique French Sawmills, through a strict forestry scheme. The sawn French Oak boards are then dried to the rigorous Hurford's standard before the final production and quality assurance phase. Hurford's genuine French Oak Solid Hardwood Flooring is graded to capture all the character and charm of this extraordinary resource.

Species	French Oak
Grade	Provincial, Rustic
Profile	Top Nail Tongue & Groove (End Matched)
Size	83mm x 12mm, 130mm x 12mm, 180mm x 21mm, 195mm x 21mm, 205mm x 21mm,
Lenaths	600mm - 2500mm







Solid Oak Block Parquetry Herringbone and Chevron

Parquetry is a unique floor system with its decorative patterns, adds quality and value to new and renovated spaces.

Species	European Oak
Species	Luiopean Oak
Grade	Prestige
Profile	Square Edge
Size	123mm x 18mm
Lengths	700mm
Coating	RAW (Sand and coat once installed)
Pieces Per Box	12 Pieces
Coverage Per Box	1.033m ²







Chevron Pattern

THE IMPORTANCE IN SELECTING THE RIGHT FINISH FOR YOUR FLOOR.

Choosing Hurford's high quality solid hardwood flooring is an important step to having a beautiful floor installed in your home, but choosing what finish is applied on top of it can make all the difference to the look and feel. Finish choices are developing at a rapid pace and products that give a more natural deep earthly tone are becoming popular.





The above example shows 2 panels of Sydney Blue Gum Flooring with alternate finishes applied. A water based finish gives a lighter appearance whereas an oiled finish brings out a darker tone. These examples are only indicative however they show that a deeper red colour can be achieved depending upon the finish that is applied.

It is recommended to test different finishes on offcut flooring pieces to finalise your finish choice.

ENGINEERED FLOORING

Experience the natural beauty of real wood with the durability and versatility of modern engineering of Hurford's Engineered Flooring ranges for a stunning and long-lasting flooring solution.



nested rows

nested rows










BLACKBUTT



Australian Native Specifications			Australian Native Herringbone Specifications	Australian Native Optimise Specifications	RUSTIC BLACKBUTT
Species	Blackbutt, Rustic Blackbutt, Blue Gum, Brush Box, Silvertop, Spotted Gum & QLD Spotted Gum	Blackbutt, Rustic Blackbutt, Spotted Gum & QLD Spotted Gum	Blackbutt, Rustic Blackbutt, Blue Gum, Brush Box, Silvertop, Spotted Gum & QLD Spotted Gum	Blackbutt & Spotted Gum	SILVERTOP
Surface	Australian Hardwood Smooth	Australian Hardwood Smooth	Australian Hardwood Smooth	Australian Hardwood Smooth	
Locking System	Välinge 5G Glueless Joining System	Välinge 5G Glueless Joining System	Tongue & Groove (Side and Ends)	Tongue & Groove (Side and Ends)	SPOTTED GUM
Edge Profile	Micro Bevel (Sides and Ends)	Micro Bevel (Sides and Ends)	Micro Bevel (Sides and Ends)	Micro Bevel (Sides and Ends)	
Coating	Bona UV Lacquer system, Matte 8-12%	Bona UV Lacquer system, Matte 8-12%	Bona UV Lacquer system, Matte 8-12%	Bona UV Lacquer system, Matte 8-12%	BRUSH BOX
Size	132mm	180mm	120mm	132mm	
Length	1,830mm & 2,190mm	1,830mm & 2,190mm	600mm	1,830mm & 2,190mm	QLD
Thickness	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)	13.5mm (Lamella Nominal 3mm)	SPOTTED GUM
Packaging	8 rows per 6 rows per 8 pieces per box, max 3 box, max 3 box - nested rows nested rows Set A (Left) &		8 rows per box, max 3 nested rows	CVDNEV	
	Rustic Blackbutt: 8 rows per box, max 4	Rustic Blackbutt: 6 rows per box, max 4	Set B (Right)		SYDNEY BLUE GUM





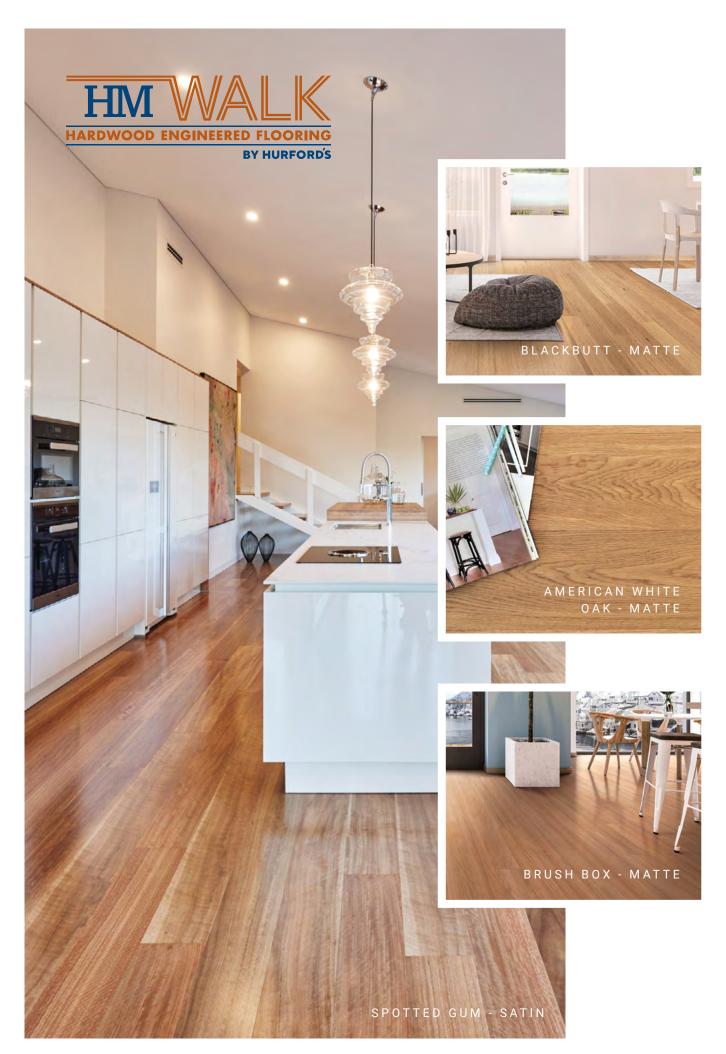















SPOTTED GUM

HM Walk Specifications	SATIN	MATTE	OAK
Species	Blackbutt, Brush Box, Ironbark, Jarrah*, Spotted Gum & Sydney Blue Gum	Blackbutt, Brush Box, Ironbark, Silvertop, Spotted Gum, Sydney Blue Gum & Tallowwood	American White Oak
Surface	Australian	Australian	Australian
	Hardwood Smooth	Hardwood Smooth	Hardwood Smooth
Locking	Välinge 2G Glueless	Välinge 5G Glueless	Välinge 2G Glueless
System	Joining System	Joining System	Joining System
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel
	(Side and Ends)	(Side and Ends)	(Side and Ends)
Coating	13 coat system incorporating Aluminium Oxide - Satin Finish	13 coat system incorporating Aluminium Oxide - Matte Finish	13 coat system incorporating Aluminium Oxide - Matte Finish
Size	136mm & 186mm	136mm	186mm
Length	1,830mm	1,830mm	1,830mm
Thickness	13.5mm	12.5mm	13.5mm
	(0.6mm Veneer)	(0.6mm Veneer)	(0.6mm Veneer)
Packaging	6 rows per carton,	6 rows per carton,	6 rows per carton,
	up to 2 nested rows	up to 2 nested rows	up to 2 nested rows

SYDNEY BLUE GUM





BRUSH BOX IRONBARK







First Floors Specifications

Species	Blackbutt	Spotted Gum	Blackbutt, Spotted Gum	Roasted Peat	Blackbutt, Spotted Gum
Surface	Australian	Australian	Australian	Australian	Australian
	Hardwood	Hardwood	Hardwood	Hardwood	Hardwood
	Light Brushed	Light Brushed	Light Brushed	Non-Brushed	Non-Brushed
Locking	Tongue & Groove	Tongue & Groove	Tongue & Groove	Tongue & Groove	Tongue & Groove
System	(Side & Ends)	(Side & Ends)	(Side & Ends)	(Side & Ends)	(Side & Ends)
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel	Square Edge
Coating	Invisible BONA UV Lacquer Matte	BONA UV Lacquer Matte	BONA UV Craft Oil Matte	BONA UV Craft Oil Matte	RAW (Uncoated)
Size	135mm	135mm	135mm & 180mm	180mm	135mm & 180mm
Length	1,830mm &	1,830mm &	1,830mm &	1,830mm &	1,830mm &
	2,190mm	2,190mm	2,190mm	2,190mm	2,190mm
Thickness	14mm (Lamella	14mm (Lamella	14mm (Lamella	14mm (Lamella	14mm (Lamella
	Nominal 4mm)	Nominal 4mm)	Nominal 4mm)	Nominal 4mm)	Nominal 4mm)
Packaging	8 rows per	8 rows per	135mm: 8 rows	6 rows per box,	135mm: 8 rows
	box, max of 3	box, max of 3	per box, max of	maximum of 2	per box, max of
	nested rows	nested rows	3 nested rows	nested rows	3 nested rows
			180mm: 6 rows per box, max of 2 nested rows		180mm : 6 rows per box, max of 2 nested rows

SHOWCASE THE NATURAL BEAUTY OF OUR AUSTRALIAN SPECIES WITH OUR NEW UV LACQUER RANGE OF FLOORING.

The new 'Invisible' UV Lacquer finish helps to bring out the warm, gentle feel of our Blackbutt flooring while the addition of non-yellowing agents ensure that your floor will maintain a clear look throughout its lifetime.

The vibrant richness of colour found in Spotted Gum flooring lends itself to a traditional UV Lacquer finish which helps to accentuate the impressive spectrum of colours available in this timber.

LUXURY IN ANY SPACE BRINGS THE FEELING OF STYLE AND SOPHISTICATION, AND STARTS FROM THE FLOOR UP.


First Floors is a premium engineered floor, with its slightly textured surface and modern matte oil finish it is the perfect choice for interiors of distinction. With the coastal golden rays of Blackbutt, the attractive wild warmth of Spotted Gum and the deep rich tones of Roasted Peat this boutique collection offers only the finest from our Australian species.

Roasted Peat, is an Australian Hardwood that has been through a thermal modification process that uses no chemicals to permanently alter the structure of the wood fibre. This process greatly increases the stability and density of the hardwood, as well as locking in the gorgeous deep earth to chocolate brown colour tones.

We use a stable hevea core along with native Australian hardwood lamellas to provide a consistent and sturdy construction in all our flooring.

Choose from one of our prefinished options for long lasting and easy-to-maintain protection or take advantage of the high degree of flexibility offered by our raw timber to perfectly match your floor to its surroundings.

Eirct Eleere

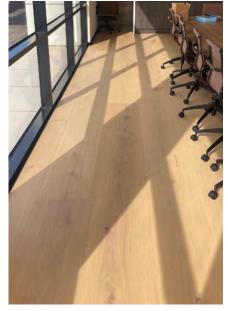




First Floors 400mm Wide Oak Specifications	NATURAL	RAW
Surface	European Oak Lightly Brushed	European Oak Smooth
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel (Sides and Ends)	Square Edge
Coating	Invisible BONA UV Lacquer	RAW (Uncoated)
Size	400mm	400mm
Length	2,800mm & 5,000mm	2,800mm & 5,000mm
Thickness	20mm (Lamella Nominal 5mm)	20mm (Lamella Nominal 5mm)
Construction	Multi Ply – Eucalyptus Substrate and Birch Back Layer	Multi Ply – Eucalyptus Substrate and Birch Back Layer
Install Suitability	Glue Down	Glue Down
Packaging	2 rows per box, some boxes contain nested rows. No less than 1,000mm for the nested length	2 rows per box, some boxes contain nested rows. No less than 1,000mm for the nested length



Genuine Oak Specifications	260/20	240/15	190/15	190/14
Colour Stains	Snowfall**, Hamptons, White Wash, Natural Clear, Western, Barrel, Slate Grey and RAW (Uncoated)	Whitehaven, Snowfall**, Hamptons, White Wash, Natural Clear, Western, Distress**, Smouldered**, Caramel, Urban, Barrel, Vintage, Wheat, Slate Grey, Ash**, Smokey**, Chocolate**, Tuxedo**, Sterling**, Nuage**, Contrast**	Whitehaven, Snowfall**, Hamptons, White Wash, Natural Clear, Western, Distress**, Smouldered**, Caramel, Urban, Barrel, Vintage, Wheat, Slate Grey, Ash**, Smokey**, Chocolate**, Tuxedo**, Sterling**, Nuage**, Contrast**	Whitehaven, Snowfall**, Hamptons, White Wash, Natural Clear, Western, Distress**, Smouldered**, Caramel, Urban, Barrel, Vintage, Wheat, Ash**, Sterling**, Smokey**, Nuage**, Chocolate**, Slate Grey, Contrast** & Tuxedo**
Surface	Subtle Brush Texture Oak - Character	Subtle Brush Texture Oak - Prime	Subtle Brush Texture Oak - Character	Subtle Brush Texture Oak - Character
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Coating	UV cured 5 coat Ciranova Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte
Size	260mm	240mm	190mm	190mm
Length	2,200mm	2,200mm	1,900mm	1,900mm
Thickness	20mm (Lamella 6mm)	15mm (Lamella 4mm)	15mm (Lamella 4mm)	14mm (Lamella 3mm)
Packaging	4 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	5 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	6 rows per box, max of 2 nested rows	6 rows per box, max of 2 nested rows

^{*}Hurford's offer RAW, a pre-sanded, square edge and unfinished product, designed to be installed and finished on site. An ideal substitute if the stains in our pre-finished range aren't quite what you're looking for.

^{**}Longer lead times may apply for this colour.

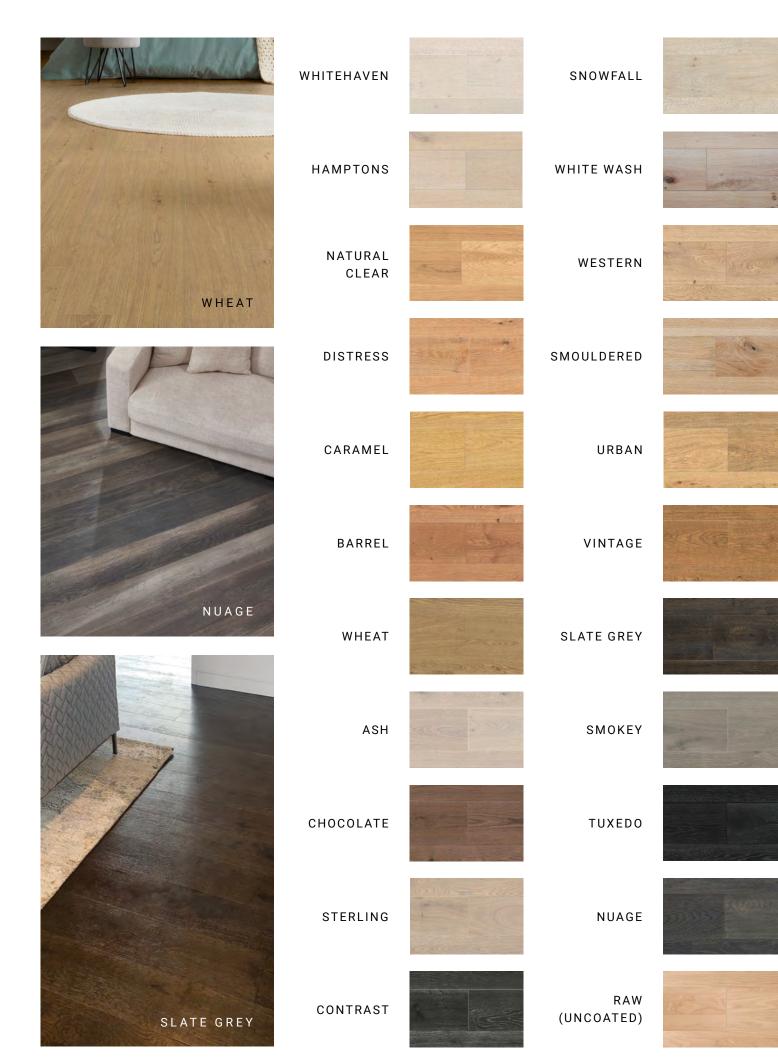









Naked Oak Specifications	NATURAL	RAW
Surface	Light Brushed Texture - Oak Prime	Smooth Lightly Sanded - Oak Prime
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel (Sides and Ends)	Fine Sand, Square Edge
Coating	UV Lacquer Matte	RAW (Uncoated)
Size	190mm	190mm
Length	1,830mm & 2,190mm	1,830mm & 2,190mm
Thickness	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)
Packaging	6 rows per box, max of 2 nested rows	6 rows per box, max of 2 nested rows



NATURAL



RAW (UNCOATED)



NATURAL CLEAR



WESTERN



BLONDE



MINK




HAZEL




RAW (UNCOATED)





Herringbone Pattern



Chevron Pattern

Hurford's Parquetry Specifications	PRE-FINISH COLOUR	RAW
Colours	Natural Clear, Western, Blonde, Mink & Hazel	RAW (Uncoated)
Pattern	Chevron or Herringbone	Chevron or Herringbone
Surface	Light Brushed Texture - Oak Character	Smooth Lightly Sanded - Oak Character
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel (Sides and Ends)	Fine Sand, Square Edge (Side and Ends)
Coating	UV cured 6 coat Klumpp system - Ultra Matte	RAW (Uncoated)
Size	150mm	150mm
Length	750mm	750mm
Thickness	14mm (Lamella Nominal 3mm)	14mm (Lamella Nominal 3mm)
Packaging	20 pieces per box	20 pieces per box









Hurford Herringbone Specifications	RAW
Surface	Smooth Lightly Sanded - Oak Prime
Locking System	Tongue & Groove (Sides & Ends)
Edge Profile	Square Edge, Side & Ends
Coating	RAW (Uncoated)
Size	120mm
Length	600mm
Thickness	14mm (Lamella Nominal 3mm)
Packaging	24 pieces per box



RAW (UNCOATED)

MATCHING ACCESSORIES

Hurford's can supply matching accessories; Aluminium Trims, MDF Wrapped Scotia's and Floating Floor Underlay

everWALK - 2mm closed cell underlay with attached moisture protection.

hushWALK - 2mm ultra high density premium underlay with attached moisture protection.





OneTrim is a collection of radiata pine, white pre-primed, kiln dried, finger jointed mouldings. We offer an extensive selection from contemporary to traditional profiles that add distinctive features, dimension, texture and architectural interests to your home, retail or commercial interior.

To view the full collection of OneTrims moulding profiles and size options, please visit www.onetrim.com.au









BLACKBUTT



CARBON



CHESTNUT



FRENCH GREY



HARBOR GREY



KHAKI



SANDSTONE



SPOTTED GUM



Inspired by the beauty of natural timber, Hurford's latest collection Supacore has been precisely created by a team of interior experts. Each design has been thoughtfully developed to appeal exclusively to the Australian market, with beautiful grain structures, warmth of colour and attention to detail.

Specifications

Colours	Blackbutt, Spotted Gum, Carbon, Chestnut, French Grey, Harbor Grey, Khaki, Sandstone
Thickness	5mm + backing (6.5mm overall)
Wear Layer	0.55mm
Dimensions	1500 (L) x 180mm (W)
Planks per box	6
M² per box	1.62m ²
M ² per pallet	89.10m ²
Install Method	Drop Lock
Finish	Matte
Surface	Aus = embossed, oaks = EIR
Top layer	Decorative film & Wear layer
Substrate Layer	Limestone Composite
Backing Layer	1.5mm IXPE
Profile	Micro Bevel
Protective Coating	UV Coating



By producing realistic designs from our own manufactured timber, Heritage LVP is on it's way to becoming the leading choice for authentically detailed and stylish contemporary colours. The Heritage LVP range brings a depth of warmth and sophistication to any residential or commercial use.

Specifications

Colours	Caramel, Coastal Blackbutt, Hamptons, Huonville Tasmanian Oak, Mink, Natural Clear, Roasted Spotted Gum, NSW Spotted Gum, Western & Wheat
Thickness	4.5mm (0.5 Wear Layer)
Length	1,524mm
Width	228mm
Packaging	7pcs - 2.44m²/box
Slip Rating	P3



Durable



Quiet underfoot



Low maintenance



Water resistant



100% recyclable



Pet friendly



Non slip back



Ultra realistic timber designs









NATURAL CLEAR

NSW SPOTTED GUM

ROASTED SPOTTED GUM

TASMANIAN OAK

WESTERN

WHEAT





Caring for your Engineered Floors

It is important that your floor is appropriately cared for and generally this just means some common sense precautions and using the right products and practices.

Cleaning your floor: Antistatic mops provide an effective means of collecting dust and grit for your daily cleaning. For a deeper clean, use a microfiber spray mop that is compatible and safe for timber floors. Steam mops must not be used. Never use excess amounts of water, oil, soap, wax or other household products to clean your floor, only use neutral pH cleaners. Loba is a company that provides suitable floor care products. Vacuum cleaners can also be used but with a need to ensure that the bristles are not worn to avoid scratches. If a spill or leak occurs, soak up the bulk of the liquid quickly so as to reduce the risk of staining.

Preventing scratches and indentations: To prevent dirt, sand, grit and other substances from being tracked onto your floor, use doormats outside each entrance to your home. As added protection floor mats can be placed inside at external doorways. However, ensure that these are not rubber-backed, latex-backed or coco fibre, which can stain the floor beneath.

Felt protectors are to be used under furniture legs and in particular moveable furniture that more easily cause scratches. In offices, casters (type W) and floor protection mats under chairs can be used to prevent the castors from marking the floor. Support larger furniture with widebearing, furniture floor protectors. Ideally, these protectors should be at least 25mm in diameter, made of non-pigmented hard plastic, and are to rest flat on the floor.

High heels and shoes with gravel and grit stuck on them can damage any floor. We suggest using rugs and runners in high traffic areas. Remember to shake out rugs and vacuum regularly. Your furry friends can also scratch your floors, so be sure to have your dog and cat toenails regularly clipped.

If you need to move heavy furniture and/or appliances across the floor, always use strips of wood or hardboard 'runways' to protect the floor. Use the 'runways', even if you have an appliance dolly or with heavy items that have their own wheels or rollers.

Care with substances: Some household substances can be very aggressive and damage the board coating. While damage from some products would seem more obvious, there are others that are much less obvious. Applied flea treatments for pets, drips from wall mounted air fresheners, insect repellents or concentrated insect sprays and ironing sprays, along with others can all damage the coating. Cleaning products must also be neutral pH and free of the likes of eucalyptus oil, which acts as a slow solvent. It is therefore important that correct cleaning products are used and that consideration is given to other products that may contact the floor.

If a substance contacts the floor which may be of concern it is important to attend to it as soon as possible, as with time greater damage often occurs. Dab the substance with an absorbent tissue or paper towel. Do not wipe it up, as this will spread it. Once absorbed wipe over with a wet paper towel containing a diluted mild detergent.



The internal environment: Changes in humidity cause floors to expand and contract. While floors can be expected to perform well in temperatures from 10°C to 32°C, and relative humidity levels between 40% and 70%, prolonged very dry or very humid weather can cause changes in the board's appearance (e.g. a crowned appearance, minor splits in the surface layer, end or edge joints becoming raised). When possible, during those times of more extreme weather conditions, protect your floor by controlling the heating and cooling, to create a comfortable living environment, maintained within the bounds outlined above

Intense sun exposure: Having your curtains and blinds closed during periods when floor areas would be subject to intense sunlight is also prudent to lessen the rate of colour change in the floor and to limit the development of minor surface splits (or checks). Window tinting and sun filter curtains are also good alternatives that help maintain an acceptable internal climate for your floor.

Note that both the timber and coatings change colour with time. We often see fading in fabrics with sun exposure and with timber floors there can be a similar effect. The change in colour is often not noticeable but when floor rugs are lifted there can be distinct colour tone differences. With new floors, the colour change is more rapid and the changes then slow with time. To lessen the effect, floor rugs should not be placed until three months after installation.

Repairs to damaged floors: Depending on the damage, there are options for repair and it is always beneficial to have a spare box of boards available in case there is a need for board replacement. Minor damage such as chips out of a board or larger indentation can often be repaired with a wax stick of a similar colour tone to your floor. Some companies also specialise in surface repairs and use a number of different

wax colours to blend the repair in. If damage is more extensive then boards can be replaced. The possibility of a recoat can also be considered which range from sacrificial polishes to two component water based polyurethane finishes. The preparation needed and process used will differ depending on the coating system and the engineered product, so it is necessary to discuss options with your flooring professional.

Warranties: Hurford's and quality go hand-in-hand. All of our engineered floorings come with a 25 year structural integrity warranty, as well as a 15 year domestic or 5 year commercial surface warranty. Full warranty details for your product can be accessed from Hurford's website. It is also important to remember, timber is a natural product with its own story. Individual boards will vary in colour, tone and features. This variation is what gives timber flooring it's natural beauty and appeal.



www.hurfords.com.au

HURFORD'S

Queensland

400 Stapylton-Jacobs Well Road, Stapylton QLD 4207 (07) 3442 6300 salesqld@hurfordwholesale.com.au

New South Wales & Australian Capital Territory

Unit 1/1 Orielton Road, Smeaton Grange NSW 2567 (02) 4646 1406 salesnsw@hurfordwholesale.com.au

Victoria & Tasmania

51 Commercial Drive, Pakenham VIC 3810 (03) 8794 3300 salesvic@hurfordwholesale.com.au

South Australia & Northern Territory

7-9 Acorn Road, Camden Park SA 5038 (08) 8376 6694 salessa@hurfordwholesale.com.au

Western Australia

7 Carbonate Road, Wangara WA 6065 0448 132 955 saleswa@hurfordwholesale.com.au









Proud Platinum Member & Accredited Manufacturer of

