

Servo actuator SEMC



Compactness



Lightweight



High power density



Roller screw technology



Servo actuator SEMC



Features

- High performance roller screw for high speed (up to 600 mm/s) and acceleration (up to 9,5 m/s²) requests
- High dynamic servomotor for high speed and acceleration requests
- Optional anti-rotation device
- Adjustable external proximity switches
- Optional lubricant for food grease compatibility
- Optional fail safe brake, absolute encoder on servomotor
- Recirculation roller screw with low lead (up to 1 mm) available on demand

Benefits

- Long lifetime, thanks to roller screw technology
- Aluminium body to save kg and limit total weight of the actuator
- Customized motor adapter for highest flexibility (max motor section 90 mm)
- Compact solution with high power density


Product description

In addition to standard electrical cylinder product range, Ewellix offers an extensive customization program that is able to fulfill specific application needs. This is important for Ewellix recognition as a knowledge engineering company and solution provider.

The SEMC actuator is one of the customized solutions designed by Ewellix. The application requirements consisted of

a dimensionally compact and lightweight actuator with a long lifetime, high speed and high acceleration.

The Ewellix solution is based on a BRC15 × 5 or 8 roller screw, with a full aluminium body, resulting in a very compact solution weighing less than 7 kg including the motor, but robust thanks to the roller screw technology used inside.

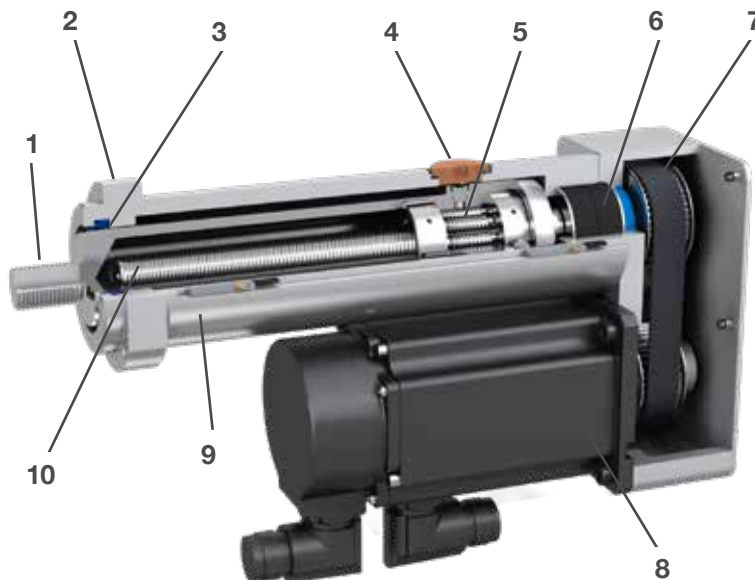

1. Male thread on push rod (customization upon request)
2. Front mount
3. Scraper on the front to keep out contaminants
4. Plug for direct grease access on roller screw nut body
5. High quality Ewellix planetary roller screw with backlash elimination
6. High quality SKF bearings
7. Pulleys/belt transmission (ratio 1:1)
8. Servomotor
9. Aluminium body
10. Steel push rod

SEMC

Linear unit




Technical data


Designation	Symbol	Unit	SEMC1505 w/o motor		SEMC1508 w/o motor	
			P10 interface	L10 interface	P10 interface	L10 interface
Performance data						
Max. dynamic axial force	F _{max}	kN	7,4	10	4,5	6,2
Max. dynamic axial force L10 ¹⁾	F _{L10}	kN	7,4	9	4,5	6,2
Max. static axial force	F _{0max}	kN	7,4	10	4,5	6,2
Dynamic load capacity	C	kN	26	26	27,4	27,4
Maximum torque to reach F _{max}	M _{max}	Nm	7,5	10	7,5	10
Max. linear speed	V _{max}	mm/s	375	375	600	600
Max. rotational speed	n _{max}	1/min	4 500	4 500	4 500	4 500
Max. acceleration	a _{max}	m/s ²	6	6	9,5	9,5
Duty cycle	D _{unit}	%	100	100	100	100
Mechanical Data						
Screw type	–	–	Roller screw	Roller screw	Roller screw	Roller screw
Screw diameter	d _{screw}	mm	15	15	15	15
Screw lead	p _{screw}	mm	5	5	8	8
Lead accuracy	–	–	G5	G5	G5	G5
Stroke	s	mm	up to 125	up to 125	up to 125	up to 125
Internal overstroke each side	s ₀	mm	2	2	2	2
Backlash	s _{backlash}	mm	0	0	0	0
Efficiency	η _{lu}	%	78	80	77	79
Gear reduction	i	–	1	1	1	1
Weight @ 0 mm stroke	m _{lu}	kg	3,7	3,7	3,7	3,7
Δ Weight per 50 mm stroke	Δm	kg	0,4	0,4	0,4	0,4
Environment						
Ambient temperature	T _{ambient}	°C	0...+40	0...+40	0...+40	0...+40
Degree of protection	IP	–	54S	54S	54S	54S

¹⁾ Maximum dynamic axial force usable to apply the theoretical lifetime calculation (L_{10})


Lifetime diagram

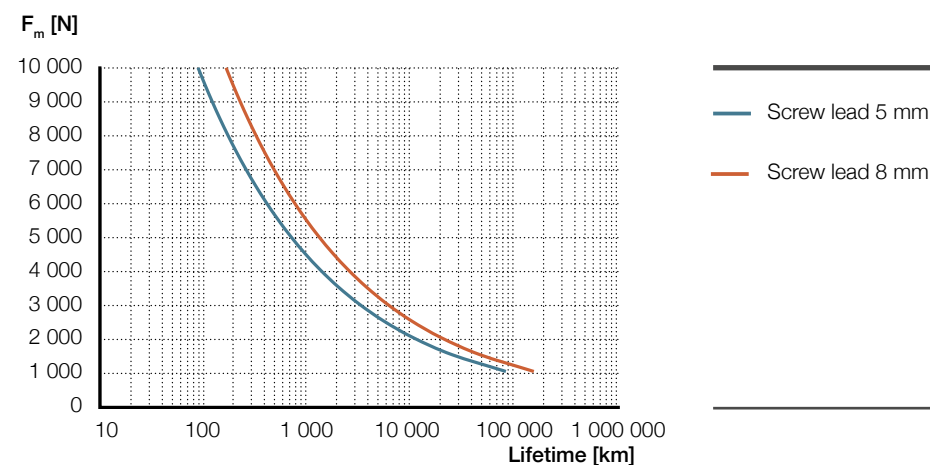

Dimensional drawing parallel configuration

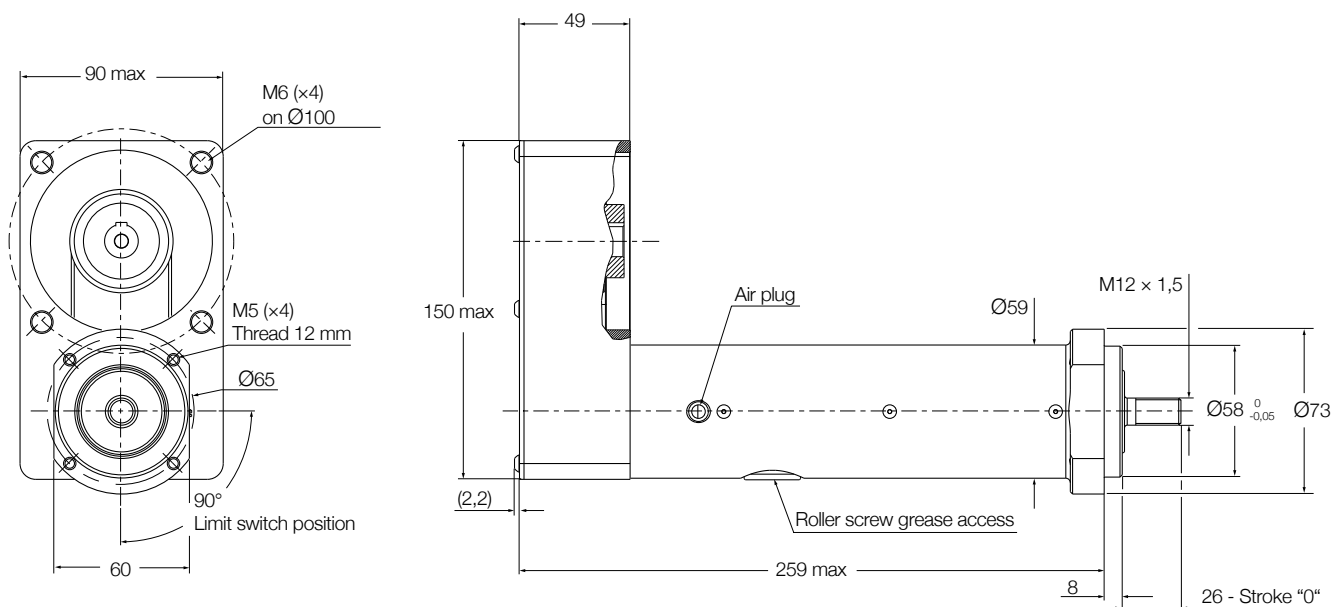

Dimensional drawing inline configuration

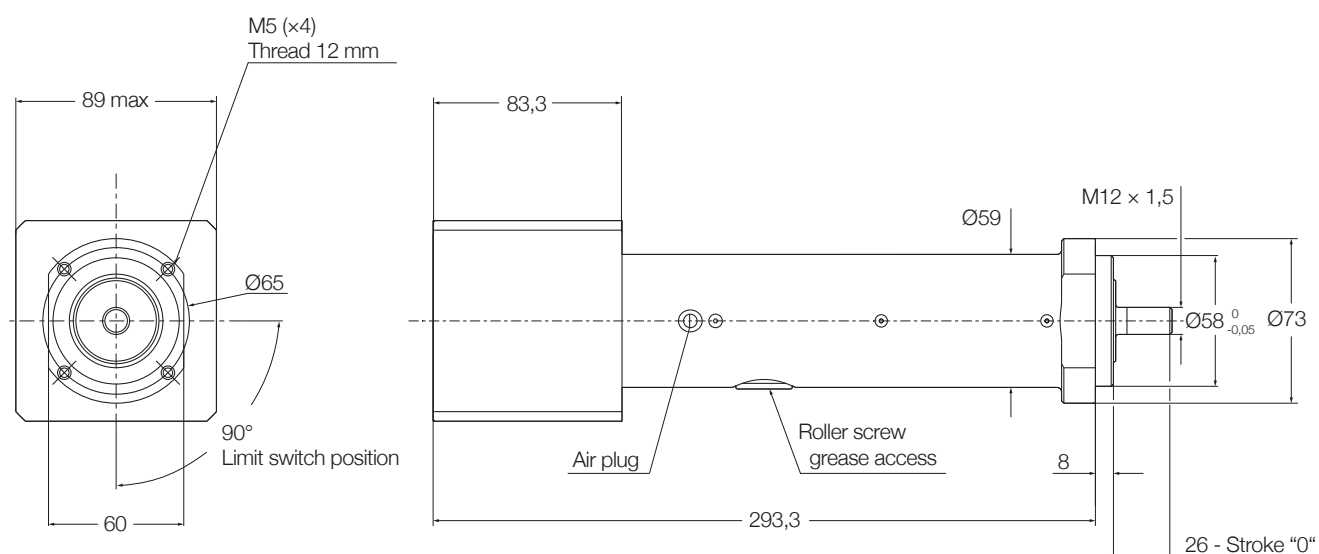

Ordering key

See page 10

SEMC


Servomotor,
inline configuration



Technical data

Designation	Symbol	Unit	SEMC1505 Lenze MCS L10 interface	SEMC1508 Lenze MCS L10 interface
Performance data				
Continuous force @ zero speed	F_{c0}	kN	3,2	2,0
Continuous force @ max speed	F_c	kN	2,4	1,5
Peak force @ zero speed	F_{p0}	kN	7,9	4,8
Peak force @ max speed	F_p	kN	4,7	2,9
Dynamic load capacity	C	kN	26	27,4
Holding force (motorbrake option)	F_{hold}	kN	10	7,1
Max. linear speed	v_{max}	mm/s	300	480
Max. acceleration	a_{max}	m/s ²	6	9,5
Duty cycle	D_{unit}	%	100	100
Mechanical Data				
Screw type	–	–	Roller screw	Roller screw
Screw diameter	d_{screw}	mm	15	15
Screw lead	p_{screw}	mm	5	8
Lead accuracy	–	–	G5	G5
Stroke	s	mm	up to 125	up to 125
Internal overstroke each side	s_0	mm	2	2
Backlash	$s_{backlash}$	mm	0	0
Gear reduction	i	–	1	1
Weight @ 0 mm stroke	m_{lu}	kg	8	8
Δ Weight per 50 mm stroke	Δm	kg	0,4	0,4
Environment				
Ambient temperature	$T_{ambient}$	°C	0...+40	0...+40
Degree of protection	IP	–	54S	54S

Dimensional drawing

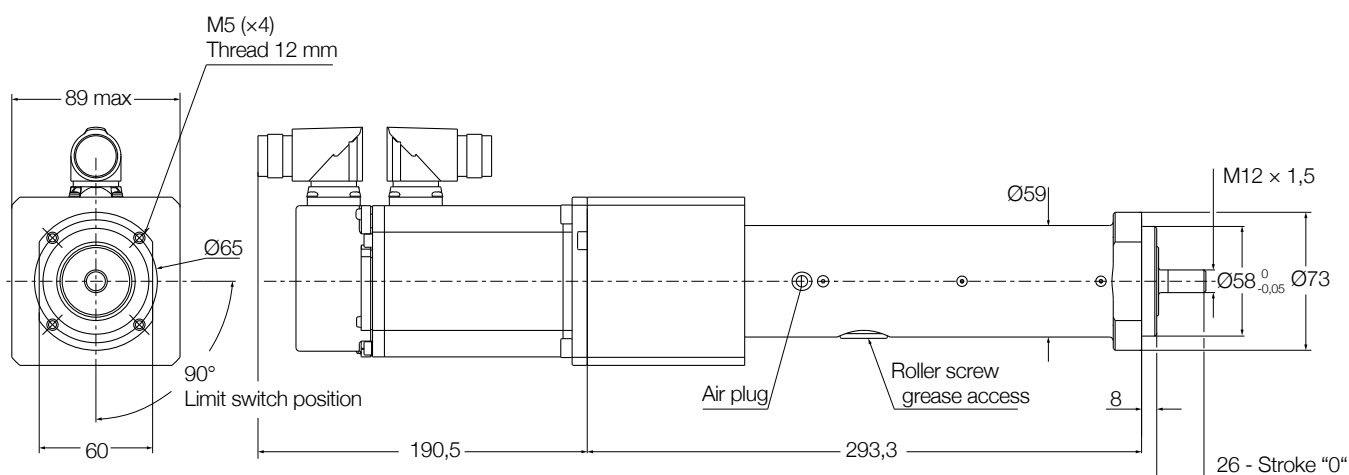

Drawing valid for a stroke of 125 mm (the maximum stroke on SEMC)

For brake option, add 20 mm on the servomotor length

For brake option, add 0,8 kg

For absolute encoder option, add 51 mm on the servomotor length


Motor plugs/connectors are orientable

Standard motor type

Motor	Lenze servo motor	Lenze 9400 Highline servoamplifier
LE6	MCS09D41	E94ASHE0034


Performance diagrams

Axial force [N]

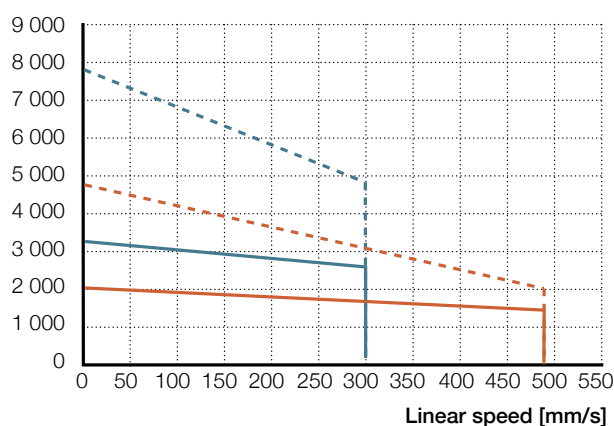

— Screw lead 5 mm - - - Screw lead 8 mm

F_m [N]

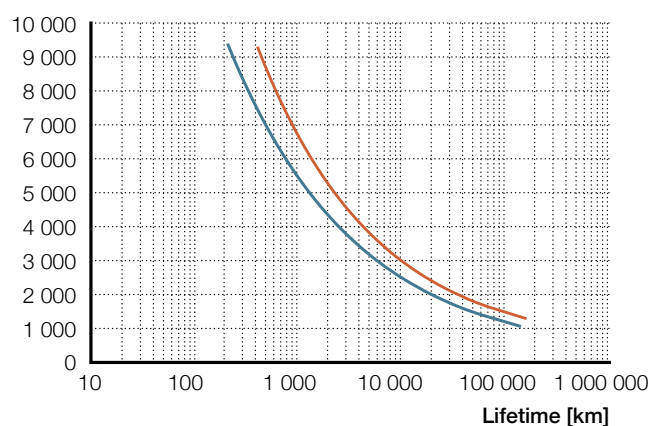

— Screw lead 5 mm - - - Screw lead 8 mm

Ordering key

See page 10

SEMC


Servomotor,
parallel configuration



Technical data

Designation	Symbol	Unit	SEMC1505 Lenze MCS P10 interface	SEMC1508 Lenze MCS P10 interface
Performance data				
Continuous force @ zero speed	F_{c0}	kN	3,1	1,9
Continuous force @ max speed	F_c	kN	2,4	1,5
Peak force @ zero speed	F_{p0}	kN	7,4	4,5
Peak force @ max speed	F_p	kN	4,6	2,8
Dynamic load capacity	C	kN	26	27,4
Holding force (motorbrake option)	F_{hold}	kN	10	6,7
Max. linear speed	v_{max}	mm/s	300	480
Max. acceleration	a_{max}	m/s ²	6	9,5
Duty cycle	D_{unit}	%	100	100
Mechanical Data				
Screw type	–	–	Roller screw	Roller screw
Screw diameter	d_{screw}	mm	15	15
Screw lead	p_{screw}	mm	5	8
Lead accuracy	–	–	G5	G5
Stroke	s	mm	up to 125	up to 125
Internal overstroke each side	s_0	mm	2	2
Backlash	$s_{backlash}$	mm	0	0
Gear reduction	i	–	1	1
Weight @ 0 mm stroke	m_{lu}	kg	8	8
Δ Weight per 50 mm stroke	Δm	kg	0,4	0,4
Environment				
Ambient temperature	$T_{ambient}$	°C	0...+40	0...+40
Degree of protection	IP	–	54S	54S

Dimensional drawing

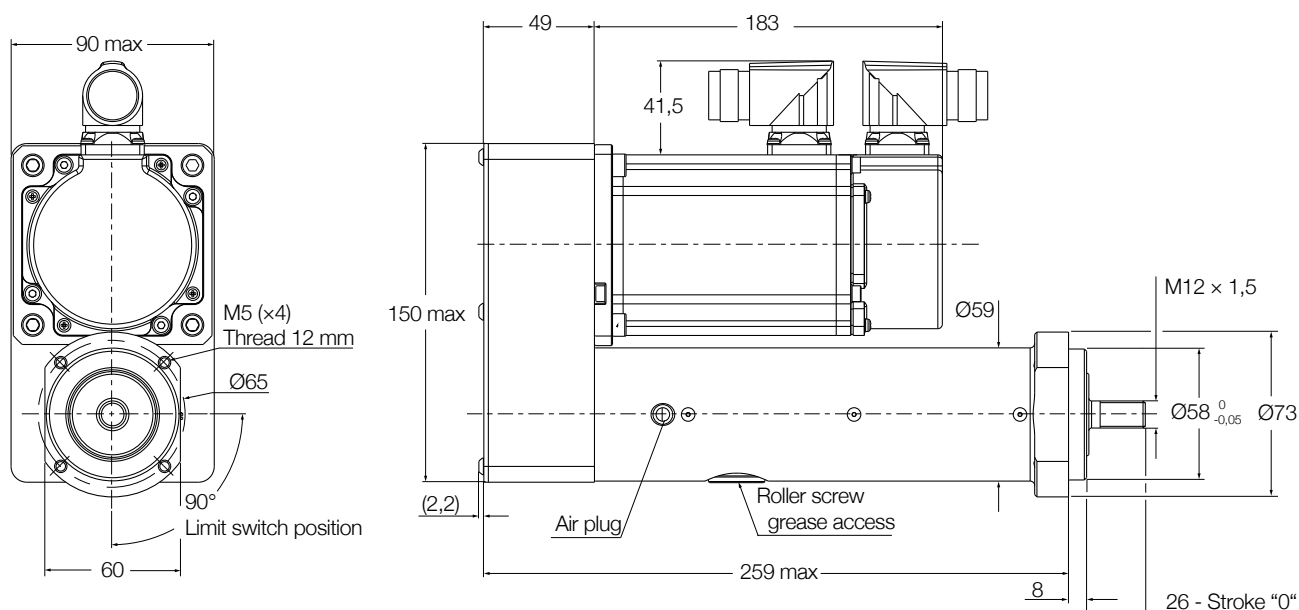

Drawing valid for a stroke of 125 mm (the maximum stroke on SEMC)

For brake option, add 20 mm on the servomotor length

For brake option, add 0,8 kg

For absolute encoder option, add 51 mm on the servomotor length


Motor plugs/connectors are orientable

Standard motor type

Motor	Lenze servo motor	Lenze 9400 Highline servoamplifier
LE6	MCS09D41	E94ASHE0034


Performance diagrams

Axial force [N]

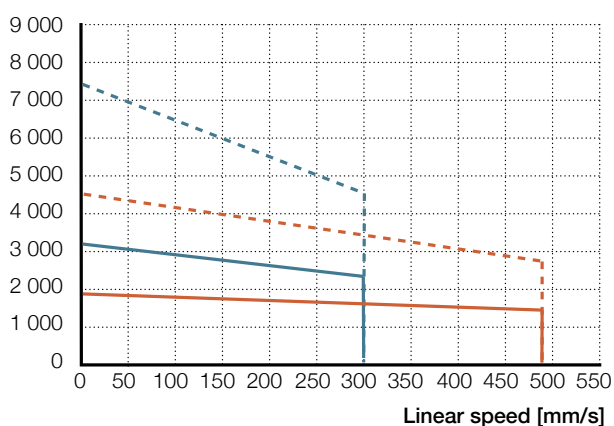

— Screw lead 5 mm — Screw lead 8 mm

F_m [N]

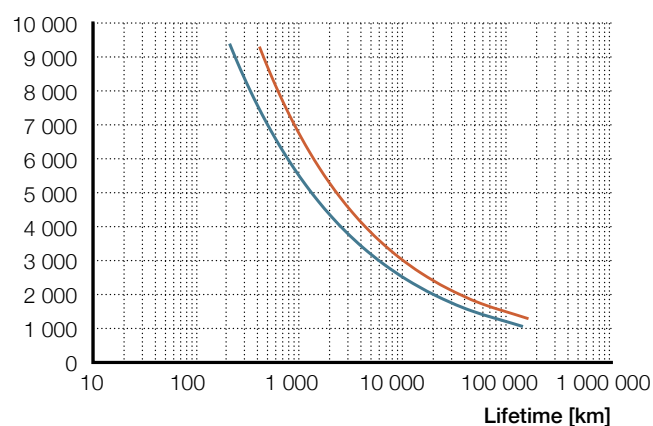

— Screw lead 5 mm — Screw lead 8 mm

Ordering key

See page 10

Ordering key

Linear units

	S	E	M	C	-	S	-	1	5	0	8	-	1	2	5		F	M	A	F	-	P	1	0	L	E	6	1	B	Y	A	1
--	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Type	_____
Design	_____
U	Linear unit only
S	Servo motor
Screw diameter	_____
Screw lead	_____
05	5 mm
08	8 mm
Stroke (mm)	_____
Rear attachment	_____
F	Front plate
Z	Custom
Front attachment	_____
M	Male thread
N	No attachment (female thread)
Z	Custom
Anti-rotation	_____
A	Anti-rotation
N	No anti-rotation
Limit switches¹⁾	_____
F	2 limit switches and 1 home switch
S	2 limit switches only
M	1 limit switch and 1 home switch
L	1 limit switch only
H	Home switch only
N	No switch

¹⁾ The limit switches configuration can be limited by the stroke length

S E M C - **S** - **1 5 0 8** - **1 2 5** **F M A F** - **P 1 0 L E 6 1 B Y A 1**

Linear unit interface

L Inline interface
P Parallel interface

Interface and gear ratio

10 ratio 1:1

Motor code**Feedback**

1 Resolver
2 Absolute encoder Hiperface

EM brake

B Brake 24 VDC
N No brake

Motor drive

Y Drive included
N No drive

Drive fieldbus

A CanOpen
B Devicenet
C Ethercat
D Ethernet
E Powerlink MN/CN
F Powerlink CN
G Profibus
H Profinet
N No fieldbus

Power and signal cables

1 5m
2 10m
3 15m
4 20m
N No cable



ewellix.com

© Ewellix

All contents of this publication are the property of Ewellix, and may not be reproduced or given to third parties (even extracts) without permission. Although great care has been taken in the production of this catalog, Ewellix does not take any responsibility for damage or other loss resulting from omissions or typographical errors. The photo may differ slightly in appearance from the actual product. Due to continuous improvements being made in our products, the product's appearance and specifications are subject to change without notice.

PUB IL-07019/1-EN-May 2020

SKF and SKF logo are trademarks of the SKF Group