



TWINS[®]

JFC 系列 - 无尘拖链

JFC Series - Dust free cloth cable drag chain


采用特氟龙外衣包裹拖链
Cable drag chain with Teflon cloth

适用于高速度运行
Suitable for high speed operation



在运行中具有较低的声噪
Low noise in operation

特氟龙外衣抗腐蚀、防静电
Teflon coat is anti-corrosion and anti-static




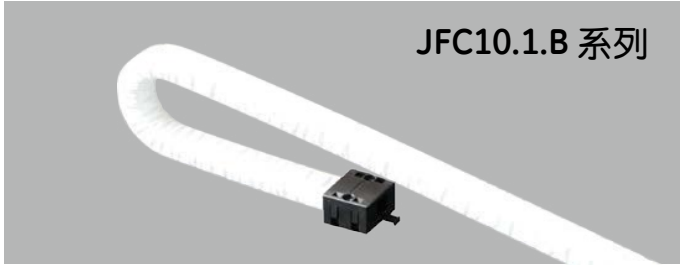

JFC10.1.B 系列



主要技术参数 Basic technical data

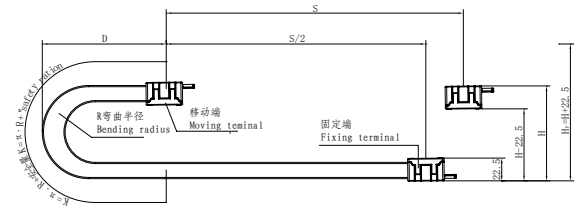


节距=16.7mm, 每米节数=60, 链长=S/2+K, S=行程距离, K=π.R+"安全量"

Pitch=16.7mm, link per meter=60, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"



R	18	28	38	48
H	50.5	70.5	90.5	110.5
D	43	53	63	73
K	90	120	150	180

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JFC10.1.15B	10	15	14.5	22.5	JFC.B	18,28,38,48	F-J	4.2mm	18	30	36		40.5	JFC10.1.15B-FJT		
JFC10.1.20B	10	20	14.5	22.5	JFC.B		F-J	4.2mm	18	35	36		45.5	JFC10.1.20B-FJT		


单位 (unit): mm

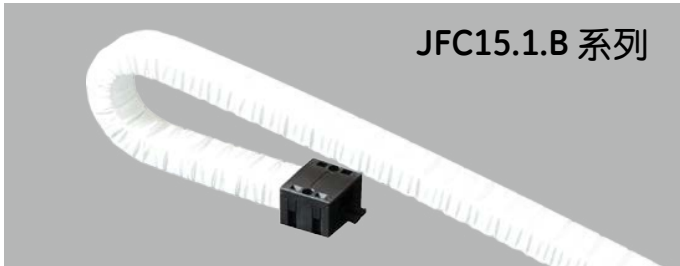

JFC15.1.B 系列

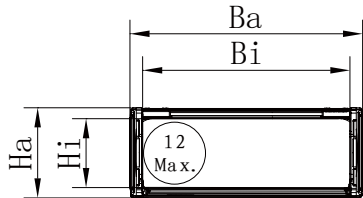

主要技术参数 Basic technical data

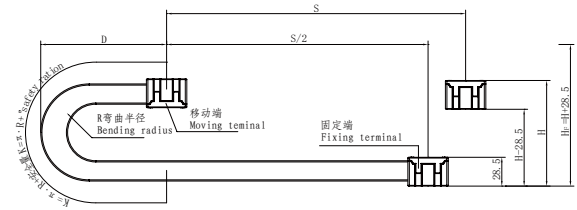

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+"安全量"


Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	28	38	48
H	76	96	116
D	58	68	78
K	140	160	200


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
JFC15.1.15B	15	15	20	23.2	JFC.B	28,38,48	F-J	4.2mm	20	31	40			41	JFC15.1.15B-FJT
JFC15.1.20B	15	20	20	28.5	JFC.B		F-J	4.2mm	20	36	40			46	JFC15.1.20B-FJT
JFC15.1.30B	15	30	20	38.2	JFC.B		F-J	4.2mm	20	46	40			56	JFC15.1.30B-FJT
JFC15.1.40B	15	40	20	48.2	JFC.B		F-J	4.2mm	20	56	40			66	JFC15.1.40B-FJT
JFC15.1.50B	15	50	20	58.2	JFC.B		F-J	4.2mm	20	66	40			76	JFC15.1.50B-FJT

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

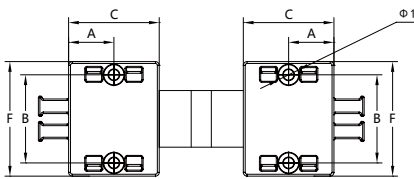

JFC(Hi).1.(Bi)B-FJT

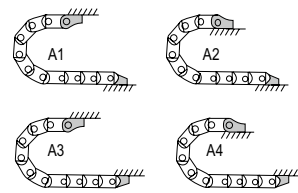

接头安装方式 Connector mounting way

订货示例 Order Example: JFC10.1.15B R18-L1000mm+FJT A1