

FLEXIBLE AND INTUITIVE A3 COLOUR MULTIFUNCTION PRINTERS DESIGNED FOR VIBRANT PRINTING AND SMOOTH SCANNING.

A3 colour multifunction printers with a range of connectivity and finishing features ideal for mid-sized workgroups.

imageFORCE C3100 Series



IMPROVED PRODUCTIVITY

Work faster with rapid start-up, 22 / 26 / 30 / 35 or 50ppm print speeds, high-speed duplex scanning and outstanding uptime. Smart connectivity and flexible finishing options keep every workflow moving – so you can get more done with less effort.

SMOOTH USER EXPERIENCE

A modern, intuitive interface makes every task feel simple. Step-by-step guidance, accurate print previews and quiet performance help everyone work confidently, comfortably and without disruption. Compatibility with uniFLOW Online and Cloud Connector ensures seamless cloud connectivity.

RELIABLE, PROACTIVE SECURITY


Guard every document with 360° protection, AI-driven security settings and strong authentication. Your data stays encrypted, your devices stay defended, and your teams stay confidently productive.

MEET SUSTAINABILITY TARGETS

Reduced power consumption, long-life components and responsibly manufactured devices made of 30% recycled plastic and 5% recycled iron, make every print a smarter choice for your business – and a lighter one for the planet.

imageFORCE C3100 Series

MAIN CONFIGURATION OPTIONS

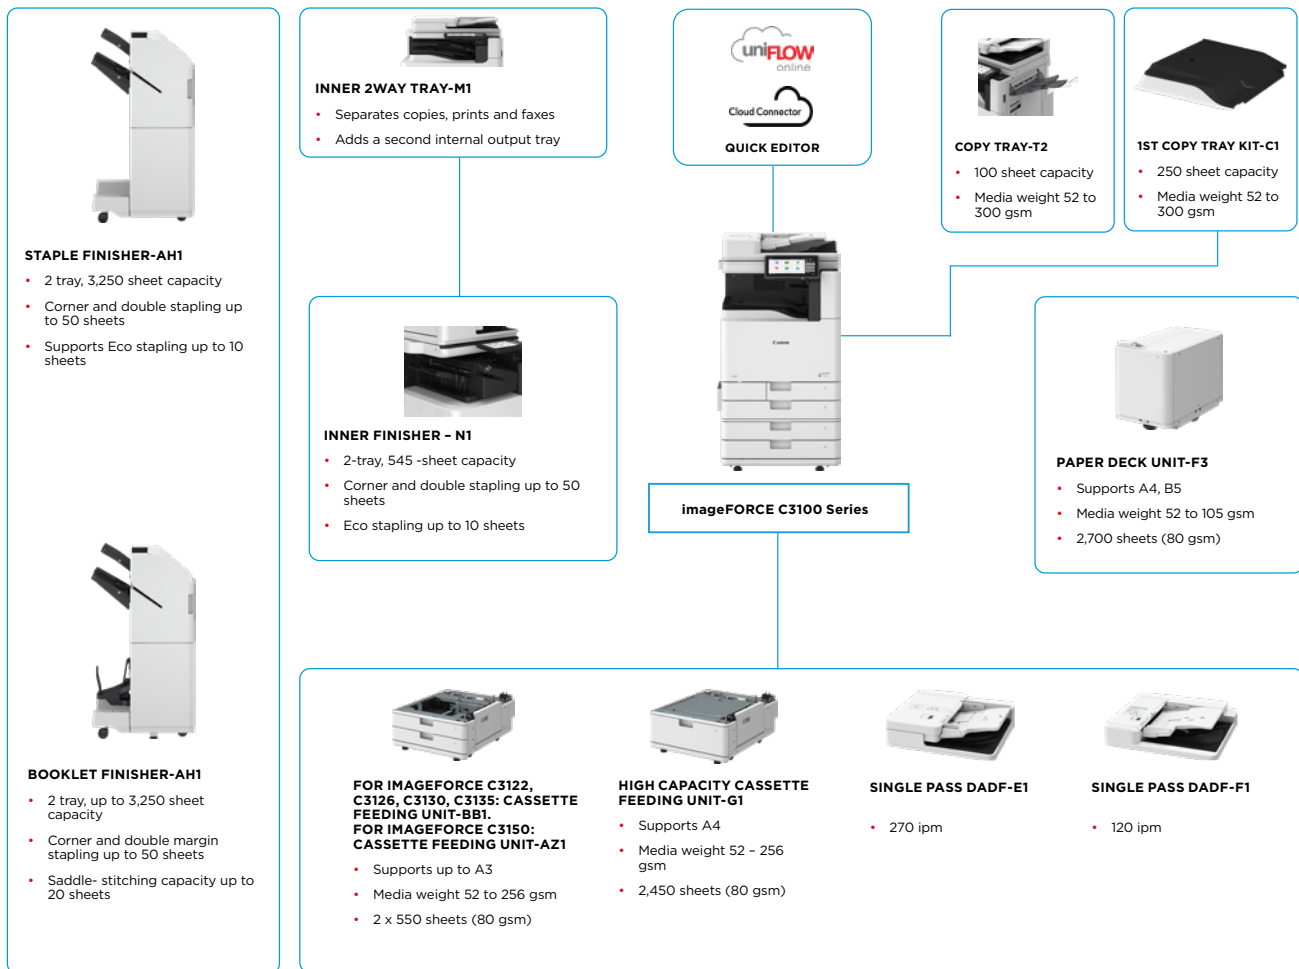

This configuration is for illustration Purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

TECHNICAL SPECIFICATIONS

imageFORCE C3100 Series

MAIN UNIT	
Machine type	A3 Color Multifunctional
Core functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.8GHz Dual Core Processor
Control Panel	10.1 inch TFT LCD WSVGA Color Touch panel
Memory	Standard: RAM 5.0GB
Storage	Standard: (SSD) 256 GB Optional: (SSD) 1TB
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Optional: Wireless LAN (IEEE 802.11 a/b/g/n/ ac/ax) OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100 sheets: Multi-purpose tray x 1 550 sheets: Standard Cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-G1 + Paper Deck Unit-F3)
Paper output capacity (A4, 80gsm)	Maximum: 3,450 Sheets (with Staple Finisher-AH1 or Booklet Finisher-AH1 and Copy Tray-T2)
Finishing capabilities*	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary depending on the options connected.
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated*, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope * 257~300gsm requires Media Adjustment Kit Upper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope Lower Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment A (standard) is required

Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free size: 100.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, ISO-C5, DL Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL * Envelope Feeder Attachment A (standard) is required.
Supported media weights	Multi-purpose tray: 52 to 300 gsm (Only 60 to 300 gsm supported with Media Adjustment Kit-A1*) * Media Adjustment Kit-A1 is required for Coated (257-300gsm) Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm
Warm-up Time	Quick Startup Mode: 4 Seconds From Sleep Mode: 10 Seconds
Dimensions (W x D x H)	With Single Pass DADF-E1: 565 x 745 x 897 mm With Single Pass DADF-F1: 565 x 745 x 862 mm
Installation Space (W x D)	Basic: 978 x 1,152 mm (right door & multi-purpose tray opened + paper cassette opened) Fully Configured: 1,651 x 1,152 mm (with Single Pass DADF-E1/ F1 + Booklet Finisher-AH1 + Copy Tray-T2 extended + paper cassette open)
Weight*	With Single Pass DADF-E1: Approx. 91 kg* With Single Pass DADF-F1: Approx. 84 kg* * including the optional 1st Copy Tray Kit-C1
*including regular toner	

TECHNICAL SPECIFICATIONS

imageFORCE C3100 Series

PRINT SPECIFICATIONS	
Print Speed (BW and CL)	<p>imageFORCE C3150 1-sided: Up to 50 ppm (A4, A5R), Up to 25 ppm (A3), Up to 45 ppm (A5, A6R), Up to 30 ppm (A4R) 2-sided: Up to 50 ppm (A4), Up to 45 ppm (A5R), Up to 25 ppm (A3), Up to 30 ppm (A4R)</p> <p>imageFORCE C3135: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R) 2-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R)</p> <p>imageFORCE C3130: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p> <p>imageFORCE C3126: 1-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p> <p>imageFORCE C3122: 1-sided: Up to 22 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 22 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p>
Print Resolution (dpi)	4,800 x 2,400
Page description languages	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3TM
Printing from mobile and cloud	<p>AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector</p> <p>A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information</p>
OS Standard Printing	Android, Windows® 11, Chrome OS, macOS (11.2.2 or later), iOS (15.2 or later), iPadOS
Fonts	<p>PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T¹ (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts²</p> <p>¹ Optional PCL International Font Set-A1 is required. ² Optional Barcode Printing Kit-D1 is required.</p>
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer, Compatible with Quick Editor
Operating Systems	<p>UFR II: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS (11.7 or later)* PCL: Windows® 11/Server2016/Server2019/Server2022/Server2025* PS: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS (11.7 or later)* PPD: Windows® 11*, macOS (11.7 or later)*</p> <p>* As of Oct. 2025</p>

COPY SPECIFICATIONS	
Copy Speed (BW and CL)	<p>imageFORCE C3150: 1-sided: Up to 50 ppm (A4, A5R), Up to 16 ppm (A3), Up to 45 ppm (A5, A6R), Up to 22 ppm (A4R) 2-sided: Up to 50 ppm (A4), Up to 30 ppm (A5R), Up to 12 ppm (A3), Up to 22 ppm (A4R)</p> <p>imageFORCE C3135: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R) 2-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R)</p> <p>imageFORCE C3130: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p> <p>imageFORCE C3126: 1-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p> <p>imageFORCE C3122: 1-sided: Up to 22 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 22 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)</p>
First-Copy-Out Time (A4, BW/CL)	<p>imageFORCE C3135: Approx. 5.5 / 7.4 seconds or less imageFORCE C3130/C3126/C3122: Approx. 6.1 / 8.4 seconds or less</p>
Copy resolution (dpi)	600 x600
Multiple Copies	Up to 999 copies
Magnification	Variable zoom: 25% to 400% (1% Increments)
Copy Features	<p>Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample, Dropout Color</p>
SCAN SPECIFICATION	
Type	<p>Standard: Color Platen Optional: Platen Cover-Y3, Single Pass DADF-E1* or Single Pass DADF-F1** [2-sided to 2-sided (Automatic with DADF)] * Multi-Sheet Feed Detection is supported. ** Multi-Sheet Feed Detection is supported as option</p> <p>DADF: Duplexing Automatic Document Feeder</p>
Document Feeder Paper Capacity (80 gsm)	<p>Single Pass DADF-E1: up to 200 Sheets Single Pass DADF-F1: up to 100 Sheets</p>

TECHNICAL SPECIFICATIONS

imageFORCE C3100 Series

Document Feeder acceptable paper weight	Document Feeder media weight: Single Pass DADF-EI: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm. Single Pass DADF-FI: 1-sided scanning: 38 to 128 gsm (BW, CL) 2-sided scanning: 50 to 128 gsm (BW, CL)
Supported media sizes	Platen scanning size: up to 297.0 x 431.8 mm Single Pass DADF-EI: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 69.9 x 139.7 mm to 304.8 x 431.8 mm Single Pass DADF-FI: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm
Scan Speed (ipm, BW/CL, A4)	Single Pass DADF-EI: 1-sided Scanning: 135/135 (300 x 300 dpi, send) 2-sided Scanning: 270/270 (300 x 300 dpi, send) Single Pass DADF-FI: 1-sided Scanning: 80/80 (300 x 300 dpi, send) 2-sided Scanning: 120/120 (300 x 300 dpi, send)
Scan Resolution (dpi)	600x600
Pull Scan Specifications	Color Network ScanGear2 for both TWAIN and WIA Supported OS: Windows® 11/Server 2016/Server 2019/Server 2022/Server 2025* *As of Oct. 2025
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, SFTP, FTPS, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax * Available OAuth 2.0 authentication method on Microsoft Exchange Online and Google Workspace
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Communication protocol	File: FTP (TCP/IP), SFTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/iFax: SMTP(send), POP3(receive)
File Format	TIFF (MMR), JPEG*, PDF (Compact, Searchable, Optimize for Web, PDF/A-1a, A-1b, PDF/A-2a, PDF/A-2b, PDF/A-2u, PDF/A-3a, PDF/A-3b, PDF/A-3u, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable), PDF/XPS (Device Signature, User Signature), Office Open XML (PowerPoint, Word) * Single-Page only.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Dropout Color

FAX SPECIFICATIONS	
Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A3, A4, A4R, A5 ¹ , A5R ¹ , A6R ¹ , B4, B5 ² , B5R ¹ Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R ¹ Sent as A4 ² Sent as B4 short
FAX memory	Up to 30,000 pages (2,000 jobs)
Speed dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log
STORE SPECIFICATIONS	
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 11* Concurrent Connections (Max.): SMB:64, WebDAV:3 *Windows 11 only supports SMB As of Oct. 2025
Advanced Space available disc space	Standard:16 GB (With option: max. 480 GB)
Advanced Space Features:	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore
SECURITY SPECIFICATIONS	
Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online/uniFLOW™(PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Microsoft Entra ID Authentication (Password Login, Card Login), Google Workspace (Pasword Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) ¹ Optional

TECHNICAL SPECIFICATIONS

imageFORCE C3100 Series

Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print ¹), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Secure Watermark ¹ Optional
Network Security	TLS 1.3 (FIPS140-3), IPsec (FIPS140-3), IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification (Validation pending)
Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (SIEM), Image Data Logging, Security Policy Setting
ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power source	220-240 V, 50/60 Hz, 5A

Power consumption	For imageFORCE C3122 / C3126 / C3130 / C3135: Maximum: Approx. 1,500 W Copying (with DADF continuous scan): Approx. 702W ¹ Standby: Approx. 140 W ¹ Sleep mode: Approx. 0.5 W ² For imageFORCE C3150: Maximum: Approx. 1,800 W Copying (with DADF continuous scan): Approx. 807W ¹ Standby: Approx. 136W ¹ Sleep mode: Approx. 0.5 W ² ¹ Reference value: measured one unit Sleep mode: Approx. 0.5 W* ² 0.5 W is not available in all circumstances due to certain settings. Typical Electricity Consumption (TEC)*: imageFORCE C3150: 0.49 kWh imageFORCE C3135: 0.33 kWh imageFORCE C3130: 0.27 kWh imageFORCE C3126: 0.24 kWh imageFORCE C3122: 0.20 kWh *As per USA Energy Star 3.2 For detailed information relating to Erp:Lot6/26 regulation, please go to: https://www.canon-europe.com/for_work/lot26/
Noise Levels	Sound Power Level (LWA,m)* Active (BW)(1-sided) imageFORCE C3150: 63 dB, Kv 3 dB imageFORCE C3135: 61 dB, Kv 3 dB imageFORCE C3130: 60 dB, Kv 3 dB imageFORCE C3126: 60 dB, Kv 3 dB imageFORCE C3122: 60 dB, Kv 3 dB Sound Pressure (LpAm)* Bystander's position: Active(BW/CL)(1-sided): imageFORCE C3150: 49 dB/ 50dB imageFORCE C3135: 47 dB/ 48 dB imageFORCE C3130: 47 dB/ 47 dB imageFORCE C3126: 46 dB/ 47 dB imageFORCE C3122: 46 dB/ 46 dB *Reference value: measured only one unit with ISO7779, described with ISO9296 (2017) Stand-by: imageFORCE C3150: 18db imageFORCE C3122 / C3126 / C3130 / C3135: Noise-free Noise-free* * "Noise-free" means that the sound pressure level at each bystander position is below the absolute criterion for background noise specified in ISO 7779.
Standards	Blue Angel (Validation pending)

TECHNICAL SPECIFICATIONS

imageFORCE C3100 Series

CONSUMABLES	
Toner Cartridges	Toner 1007 BK/C/M/Y
Toner Yield (Estimated @ 5.0% Coverage)	Toner 1007 BK: 36,000 pages Toner 1007 C/M/Y: 19,000 pages
SOFTWARE AND PRINTER MANAGEMENT	
Tracking and reporting	uniFLOW Online
Remote management tools	iW Enterprise Management Console Remote Distribution & Management Service Monitoring Service
Print Support Application	Canon Print Assistant Quick Editor
Scanning software	Color Network ScanGear 2
Optimisation tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)
PAPER SUPPLY OPTIONS	
Cassette Feeding Unit-BB1 for imageFORCE C3122 / C3126 / C3130 / C3135. Cassette Feeding Unit-AZ1 for imageFORCE C3150.	Paper Capacity: 550 sheets x 2 (1,100 sheets) (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256 gsm
High Capacity Cassette Feeding Unit-G1	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm
Paper Deck Unit-F3	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Pre-punched, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 105 gsm
OUTPUT OPTIONS	
1st Copy Tray Kit-C1	Capacity (with 80gsm paper): 1-Sided Printing A4, A5, A5R, A6R, B5, B5R: 250 sheets SRA3, A3, A4R, B4: 100 sheets 2-Sided Printing A4, A5, A5R, A6R, B5, B5R: 200 sheets SRA3, A3, A4R, B4: 100 sheets Paper Weight: 52 to 300 gsm
Inner 2way Tray-M1	(Requires 1st Copy Tray Kit-C1) Capacity (with 80 gsm paper) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Lower tray: Refer to 1st Copy Tray Kit-C1 Paper Weight: 52 to 300 gsm
Copy Tray-T2	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 220 gsm

Inner Finisher-N1	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: approx. 45 sheets Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)
Inner 2/4 Hole Puncher-D1	(Requires the Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
Inner 4 Hole Puncher-D1	(Requires the Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
Staple Finisher-AH1	Tray Capacity (with 80gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: approx. 250 sheets SRA3, A3, A4R, B4, B5R: approx. 125 sheets Lower Tray: A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets A6R: 250 sheets Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets Paper Weight: Upper Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: 50 sheets (52 to 90 gsm)
Booklet Finisher-AH1	(Includes the above Staple Finisher-AH1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)

2/4 Hole Puncher Unit-A1	(Requires either the Staple Finisher-AH1 or Booklet Finisher-AH1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
---------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

4 Hole Puncher Unit-A1	(Requires either the Staple Finisher-AH1 or Booklet Finisher-AH1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
-------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

HARDWARE ACCESSORIES

Others	Single Pass DADF-E1 Single Pass DADF-F1 Document Feeder Double Feeding Detection Kit-A1 (only for Single Pass DADF-F1) Platen Cover-Y3 Utility Tray-B1 Numeric Keypad-A2 Media Adjustment Kit-A1 IC Card Reader Box for Numeric Keypad-A1 Option Attachment kit for Reader-A2
---------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SECURITY OPTIONS

Data Security	250GB SSD-A1 1TB SSD-A1 MEMORY Mirroring Kit-A2
----------------------	-------------------------------------------------------

SYSTEM AND CONTROLLER OPTIONS

Print Accessories	PS Printer Kit-BG1 PCL International Font Set-A1 Barcode Printing Kit-D1
--------------------------	--------------------------------------------------------------------------------

System Accessories	Copy Control Interface Kit-A1 Serial Interface Kit-K3 Wireless LAN Board-H1 Wireless LAN Attachment Kit-C1 Wireless LAN 5GHz License-A1
---------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------

Fax Accessories	Super G3 FAX Board-BR1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
------------------------	------------------------------------------------------------------------

OTHER OPTIONS

Accessibility Accessories	ADF Access Handle-A1
----------------------------------	----------------------

Staple Cartridges	Staple-P1 Staple Cartridge-Y1/Z1
--------------------------	-------------------------------------



Certifications and compatibility



Canon Inc.
Canon.com

Canon Europe
canon-europe.com

English Edition
© Canon Europa N.V. 2026