

# FLEXIBLE AND INTUITIVE A3 BLACK AND WHITE MULTIFUNCTION PRINTERS DESIGNED FOR HIGH QUALITY PRINTING AND SCANNING.

High-performing black and white A3 multifunction printers with a range of connectivity and finishing features ideal for mid-sized workgroups.

## imageFORCE 4100 Series



### IMPROVED PRODUCTIVITY

Work faster with rapid start-up, 25/30/45ppm print speeds, high speed duplex scanning and outstanding uptime. Smart connectivity and flexible finishing options keep every workflow moving — so you can get more done with less effort.

### SMOOTH USER EXPERIENCE

A modern, intuitive interface makes every task feel simple. Step-by-step guidance, accurate print previews and quiet performance help everyone work confidently, comfortably and without disruption. Compatibility with uniFLOW Online and Cloud Connector ensures seamless cloud connectivity.

### RELIABLE, PROACTIVE SECURITY


Guard every document with 360° protection, AI driven security settings and strong authentication. Your data stays encrypted, your devices stay defended, and your teams stay confidently productive.

### MEET SUSTAINABILITY TARGETS

Reduced power consumption, long-life components and responsibly manufactured devices made of 30% recycled plastic and 5% recycled iron, make every print a smarter choice for your business—and a lighter one for the planet.

# imageFORCE 4100 Series

## MAIN CONFIGURATION OPTIONS

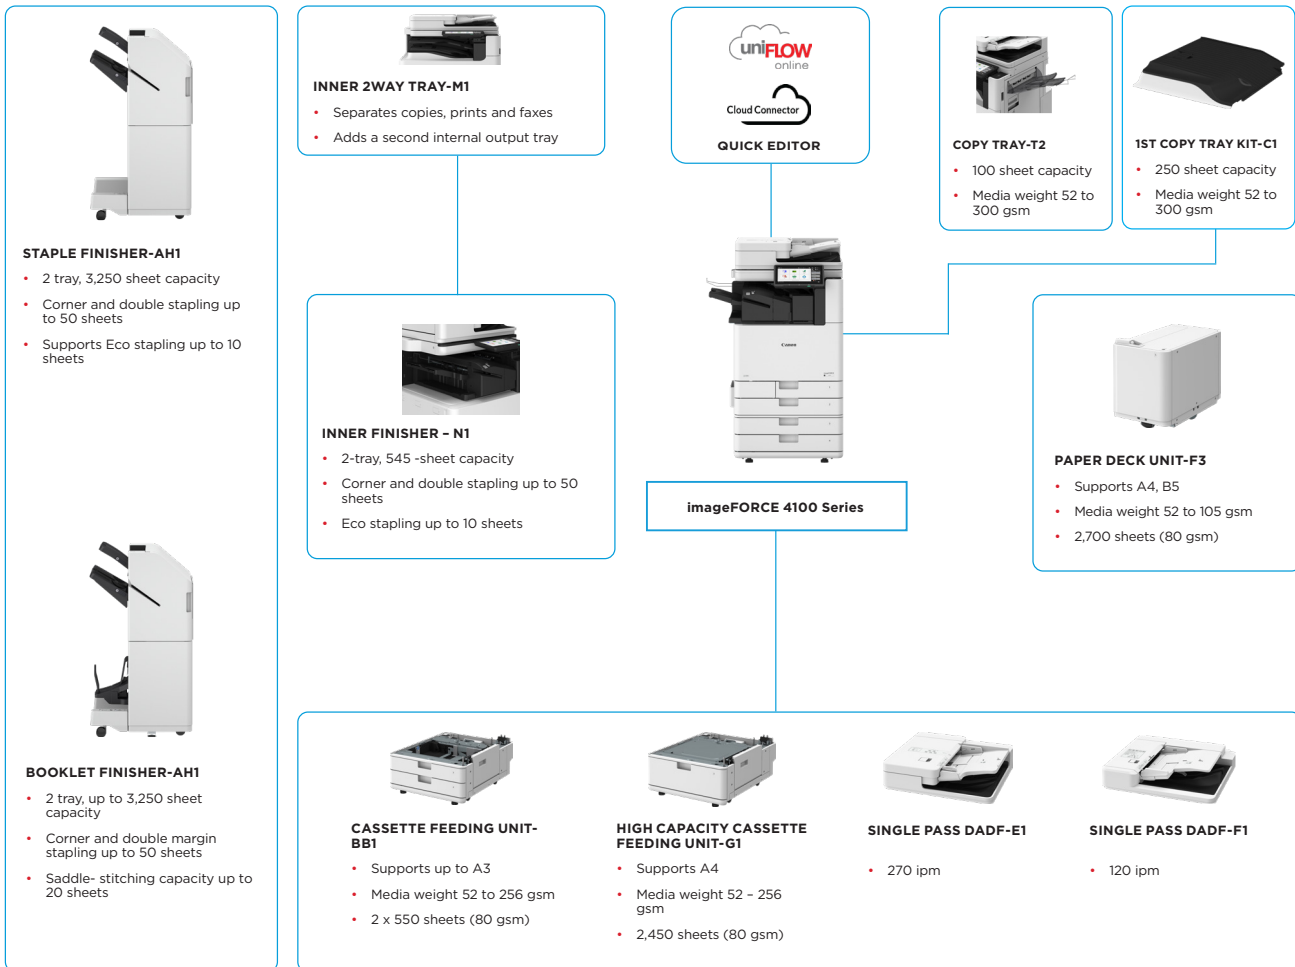

This configuration is for illustration Purpose only. For a complete list of options and the exact compatibility relationships please refer to the [online product configurator](#)

# TECHNICAL SPECIFICATIONS

# imageFORCE 4100 Series

MAIN UNIT	
<b>Machine type</b>	A3 Monochrome Multifunctional
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax
<b>Processor</b>	1.8GHz Dual Core Processor
<b>Control Panel</b>	10.1 inch TFT LCD WSVGA Color Touch panel
<b>Memory</b>	Standard: RAM: 5.0GB
<b>Storage</b>	Standard: (SSD) 256GB Optional: (SSD) 1TB
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T Optional: Wireless LAN (IEEE 802.11a/b/g/n/ac/ax) OTHERS Standard: USB 2.0 (Host) x 1, USB 3.0 (Host) x 1, USB 2.0 (Device) x 1 Optional: Serial Interface, Copy Control Interface
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet Standard cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-G1 + Paper Deck Unit-F3)
<b>Paper Output Capacity (A4, 80gsm)</b>	Maximum: 3,450 Sheets (with Staple Finisher-AH1 or Booklet Finisher-AH1 and Copy Tray-T2)
<b>Finishing capabilities*</b>	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary depending on the options connected.
<b>Supported Media Types</b>	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated*, Tracing, Bond, Transparency, Labels, Pre-punched, Letterhead, Envelope * 257-300gsm requires Media Adjustment Kit  Upper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope  Lower Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment Kit A (standard) is required.
<b>Supported Media Sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free Size: 100.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm  Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5  Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL * Envelope Attachment A (standard) is required.
<b>Supported media weights</b>	Multi-purpose tray: 52 to 300 gsm (Only 60 to 300 gsm supported with Media Adjustment Kit) Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm
<b>Warm-up Time</b>	Quick Startup Mode: 4 Seconds From Sleep Mode: 10 Seconds
<b>Dimensions (W x D x H)</b>	With Single Pass DADF-EI: 565 x 745 x 897 mm With Single Pass DADF-FI: 565 x 745 x 862 mm
<b>Installation Space (W x D)</b>	Basic: 978 x 1,152 mm (right door & multi-purpose tray opened + paper cassette opened)  Fully Configured: 1,651 x 1,152 mm (with Single Pass DADF-EI/FI + Booklet Finisher-AH1 + Copy Tray-T2 extended + paper cassette open)
<b>Weight*</b>	With Single Pass DADF-EI: Approx. 80 kg* With Single Pass DADF-FI: Approx. 73 kg*
<b>*including regular toner</b>	* including the optional 1st Copy Tray Kit-C1

PRINT SPECIFICATIONS	
<b>Print Speed(BW)</b>	imageFORCE 4145: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R) 2-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R)  imageFORCE 4135: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R) 2-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R)  imageFORCE 4125: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
<b>Print Resolution (dpi)</b>	4,800 x 2,400
<b>Page description languages</b>	Standard: UFR II, PCL6/PCL5 Optional: Adobe® PostScript®3TM
<b>Printing from mobile and cloud</b>	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector  A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
<b>OS Standard Printing</b>	Android, Windows® 10/11, Chrome OS, macOS (11.2.2 or later), iOS (15.2 or later), iPadOS
<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2  *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
<b>Print Features</b>	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer, Compatible with Quick Editor
<b>Operating System</b>	UFR II: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS (11.7 or later)* PCL: Windows® 11/Server2016/Server2019/Server2022/Server2025* PS: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS (11.7 or later)* PPD: Windows® 11*, macOS (11.7 or later)*  * As of Oct. 2025
COPY SPECIFICATIONS	
<b>Copy Speed (BW)</b>	imageFORCE 4145: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25ppm (A4R) 2-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R)  imageFORCE 4135: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R) 2-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 17 ppm (A4R)  imageFORCE 4125: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
<b>First-Copy-Out Time (A4, BW/CL)</b>	imageFORCE 4145: 4.6 seconds imageFORCE 4135: 5.5 seconds imageFORCE 4125: 6.1 seconds
<b>Copy resolution (dpi)</b>	600 x 600
<b>Multiple Copies</b>	Up to 9,999 copies
<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments)

# TECHNICAL SPECIFICATIONS

# imageFORCE 4100 Series

<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
----------------------	---

## SCAN SPECIFICATION

<b>Type</b>	Standard: Color Platen Optional: Platen Cover-Y3, Single Pass DADF-E1* or Single Pass DADF-F1** [2-sided to 2-sided (Automatic with DADF)] * Multi-Sheet Feed Detection is supported. ** Multi-Sheet Feed Detection is supported as option DADF: Duplexing Automatic Document Feeder
<b>Document Feeder Paper Capacity (80 gsm)</b>	Single Pass DADF-E1: up to 200 Sheets Single Pass DADF-F1: up to 100 Sheets
<b>Document Feeder acceptable paper weight</b>	Document Feeder media weight: Single Pass DADF-E1: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.  Single Pass DADF-F1: 1-sided scanning: 38 to 128 gsm (BW, CL) 2-sided scanning: 50 to 128 gsm (BW, CL)
<b>Supported media sizes</b>	Platen scanning size: up to 297.0 x 431.8 mm  Single Pass DADF-E1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 69.9 x 139.7 mm to 304.8 x 431.8 mm Single Pass DADF-F1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm
<b>Scan Speed (ipm, BW/CL, A4)</b>	Single Pass DADF-E1: 1-sided Scanning: 135/135 (300 x 300 dpi, send) 2-sided Scanning: 270/270 (300 x 300 dpi, send) Single Pass DADF-F1: 1-sided Scanning: 80/80 (300 x 300 dpi, send) 2-sided Scanning: 120/120 (300 x 300 dpi, send)
<b>Scan Resolution (dpi)</b>	600x600
<b>Pull Scan Specifications</b>	Color Network ScanGear2 for both TWAIN and WIA  Supported OS: Windows® 11/Server 2016/Server 2019/Server 2022/Server 2025*  *As of Oct. 2025
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)

## SEND SPECIFICATIONS

<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, SFTP, FTPS, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax * Available OAuth 2.0 authentication method on Microsoft Exchange Online and Google Workspace
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Communication protocol</b>	File: FTP (TCP/IP), SFTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/iFax: SMTP(send), POP3(receive)

<b>File Format</b>	TIFF (MMR), JPEG*, PDF (Compact, Searchable, Optimize for Web, PDF/A-1a, A-1b, PDF/A-2a, PDF/A-2b, PDF/A-2u, PDF/A-3a, PDF/A-3b, PDF/A-3u, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable), PDF/XPS (Device Signature, User Signature), Office Open XML (PowerPoint, Word) * Single-Page only.
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Dropout Color

## FAX SPECIFICATIONS

<b>Maximum Number of Connection Lines</b>	1
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (dpi)</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5*, A5R*, A6R*, B4, B5*, B5R* Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R *1 Sent as A4 *2 Sent as B4 short
<b>FAX memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed dials</b>	Max. 200
<b>Group dials/destinations</b>	Max. 199 dials
<b>Sequential broadcast</b>	Max. 256 addresses
<b>Memory backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

## STORE SPECIFICATIONS

<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 11* Concurrent Connections (Max.): SMB:64, WebDAV:3 *Windows 11 only supports SMB  As of Oct. 2025
<b>Advanced Space available disc space</b>	Standard:16 GB (With option: max. 480 GB)
<b>Advanced Space Features:</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

## SECURITY SPECIFICATIONS

<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online/uniFLOW*(PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Microsoft Entra ID Authentication (Password Login, Card Login), Google Workspace (Password Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) *1 Optional
--	--

# TECHNICAL SPECIFICATIONS

# imageFORCE 4100 Series

<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Secure Watermark *1 Optional
<b>Network Security</b>	TLS 1.3 (FIPS140-3), IPSec (FIPS140-3), IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
<b>Device Security</b>	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification (Validation pending)
<b>Device Management and Auditing</b>	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (SIEM), Image Data Logging, Security Policy Setting
<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
<b>Power source</b>	220-240 V, 50/60 Hz, 5A
<b>Power consumption</b>	Maximum: Approx. 1,500W Copying (with DADF continuous scan): Approx. 628W*1 Standby: Approx. 143W*1 Sleep Mode: Approx. 0.5W*2 *1 Reference value: measured one unit *2 0.5W sleep mode is not available in all circumstances due to certain settings.  Typical Electricity Consumption (TEC)* : imageFORCE 4145: 0.43 kWh imageFORCE 4135: 0.33 kWh imageFORCE 4125: 0.21 kWh  *As per USA Energy Star 3.2  For detailed information relating to Erp:Lot6/26 regulation, please go to: <a href="https://www.canon-europe.com/for_work/lot26/">https://www.canon-europe.com/for_work/lot26/</a>
<b>Noise levels</b>	Sound Power Level (LWA,m) Active (BW)(1-sided) imageFORCE 4145: 64dB, Kv 3dB imageFORCE 4135: 62dB, Kv 3dB imageFORCE 4125: 61dB, Kv 3dB  Sound Pressure (LpAm) Bystander's position: Active(BW)(1-sided/2-sided): imageFORCE 4145: 50dB imageFORCE 4135: 48dB imageFORCE 4125: 47dB *Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)  Stand-by: Noise-free* **Noise-free* means that the sound pressure level at each bystander position is below the absolute criterion for background noise specified in ISO 7779.

<b>Standards</b>	Blue Angel (Validation pending)
<b>CONSUMABLES</b>	
<b>Toner Cartridges</b>	Toner 1010 BK/C/M/Y
<b>Toner Yield (Estimated @ 6.0% Coverage)</b>	Toner 1010 BK: 42,000 pages
<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>Tracking and reporting</b>	uniFLOW Online
<b>Remote management tools</b>	iW Enterprise Management Console Remote Distribution & Management Service Monitoring Service
<b>Print Support Application</b>	Canon Print Assistant
<b>Scanning software</b>	Color Network ScanGear 2
<b>Optimisation tools</b>	Canon Driver Configuration Tool
<b>Platform</b>	MEAP (Multifunctional Embedded Application Platform)
<b>PAPER SUPPLY OPTIONS</b>	
<b>Cassette Feeding Unit-BB1</b>	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256 gsm
<b>High Capacity Cassette Feeding Unit-G1</b>	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm
<b>Paper Deck Unit-F3</b>	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Pre-punched, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 105 gsm
<b>OUTPUT OPTIONS</b>	
<b>1st Copy Tray Kit-C1</b>	Capacity (with 80gsm paper): 1-Sided Printing A4, A5, A5R, A6R, B5, B5R: 250 sheets SRA3, A3, A4R, B4: 100 sheets 2-Sided Printing A4, A5, A5R, A6R, B5, B5R: 200 sheets SRA3, A3, A4R, B4: 100 sheets Paper Weight: 52 to 300 gsm
<b>Inner 2way Tray-M1</b>	(Requires 1st Copy Tray Kit-C1) Capacity (with 80 gsm paper) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Lower tray: Refer to 1st Copy Tray Kit-C1 Paper Weight: 52 to 300 gsm
<b>Copy Tray-T2</b>	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 220 gsm
<b>Inner Finisher-N1</b>	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: approx. 45 sheets Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)

# TECHNICAL SPECIFICATIONS

# imageFORCE 4100 Series

<b>Inner 2/4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
<b>Inner 4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
<b>Staple Finisher-AH1</b>	Tray Capacity (with 80gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: approx. 250 sheets SRA3, A3, A4R, B4, B5R: approx. 125 sheets Lower Tray: A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets A6R: 250 sheets Envelope: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets Paper Weight: Upper Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: 50 sheets
<b>Booklet Finisher-AH1</b>	(Includes the above Staple Finisher-AH1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)
<b>2/4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher-AH1 or Booklet Finisher-AH1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
<b>4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher-AH1 or Booklet Finisher-AH1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R

HARDWARE ACCESSORIES	
<b>Others</b>	Single Pass DADF-E1 Single Pass DADF-F1 Document Feeder Double Feeding Detection Kit-A1 (Only for Single Pass DADF-F1) Platen Cover-Y3 Utility Tray-B1 Numeric Keypad-A2 Media Adjustment Kit-A1 IC Card Reader Box for Numeric Keypad-A1 Option Attachment kit for Reader-A2
SECURITY OPTIONS	
<b>Data Security</b>	250GB SSD-A1 1TB SSD-A1 MEMORY Mirroring Kit-A2
SYSTEM AND CONTROLLER OPTIONS	
<b>Print Accessories</b>	PS Printer Kit-BG1 PCL International Font Set-A1 Barcode Printing Kit-D1
<b>System Accessories</b>	Copy Control Interface Kit-A1 Serial Interface Kit-K3 Wireless LAN Board-H1 Wireless LAN Attachment Kit-C1 Wireless LAN 5GHz License-A1
<b>Fax Accessories</b>	Super G3 FAX Board-BR1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
OTHER OPTIONS	
<b>Accessibility Accessories</b>	ADF Access Handle-A1
<b>Staple Cartridges</b>	Staple-P1 Staple Cartridge-Y1/Z1

Trellix



## Certifications and compatibility



**Canon**

### Canon Ireland

3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2052525  
canon.ie

### Canon (UK) Ltd

The Bower  
4 Roundwood Avenue  
Stockley Park  
Uxbridge  
UB11 1AF

**Canon Inc.**  
Canon.com

**Canon Europe**  
canon-europe.com

**English Edition**

© Canon Europa N.V. 2026