



FHT2400 Series

FHT2400 Full Height Turnstile

FHT2411 Full Height Turnstile
(RFID Access Control System)

FHT2422 Full Height Turnstile
(Fingerprint and RFID Access Control System)



The ZKTeco FHT2400 Full Height Turnstile is the most secure cost-effective entrance control system designed for high-traffic volume.

FHT2400 is a full height turnstile series designed to provide the utmost perimeter security. The possibility of tailgating and "hop-overs" is completely eliminated.

Besides securing door entrances and interior lobbies, the perimeter security of a building is an important extra layer of protection from unauthorized visitors. FHT2400 is an all metal full height turnstile that is extremely durable & secure and is suitable for outside use. Its rugged construction ensures trouble free and dependable operation.

FHT2400's nine rotating steel metal barriers are normally held in a locked position, thus denying passage to the secured side. Upon FHT2400's reader (RFID and/or biometric) positively recognizing a user's valid access card or biometric credential, its barriers unlock automatically, thus allowing users passage to the secured side.

During emergencies and power outages the barriers automatically unlock, thereby ensuring users FAST unencumbered exit to safety.

FHT2400 provides both **security** and **convenience**, all in a very durable yet clean design.

Built-in Reader Integration






- FHT2400 series can be pre-ordered from the factory with an integrated RFID card or fingerprint reader (pictured on the left)... or any other biometric reader (i.e. face, finger-vein, palm-vein, etc). This greatly reduces installation time & expense.
- FHT2400 series and associated access control readers are all factory-tested prior to shipping.
- ZKTeco provides true plug 'n play turnstiles with the lowest possible total cost of ownership in the industry!

Specifications

Power requirements	AC110V/220V, 50/60Hz	
Working temperature	28°F to 140°F	
Working humidity	0%~95%	
Working environment	Indoor/Outdoor	
Speed of throughput	RFID	Maximum 30/minute
	Fingerprint	Maximum 25/minute
Lane width(inch)(mm)	580	
Footprint(inch)(mm*mm)	55*51 inch ,1400*1320	
Dimension(inch)(mm)	L=55,1400 W=51,1320 H=87, 2220	
Dimension with packing(inch)(mm)	2100, 82 x 1435, 56 x 470, 18 & 1975, 77x925, 36x895, 35	
LED indicator	Y	
Cabinet material	SUS304 Stainless Steel	
Barrier material	SUS304 Stainless Steel	
Barrier movement	Rotating	
Emergency mode	Y	
Security level	High	
MCBF	2 million	
Ingress protection	IP54	

Dimensions

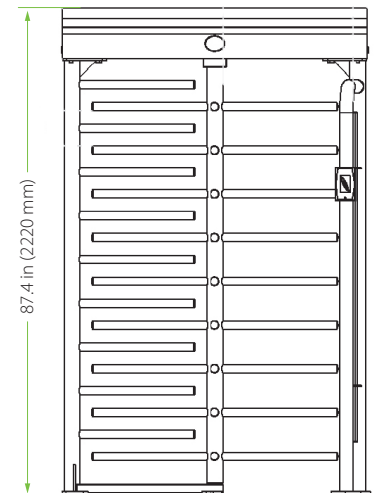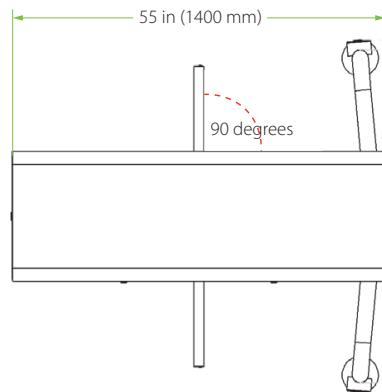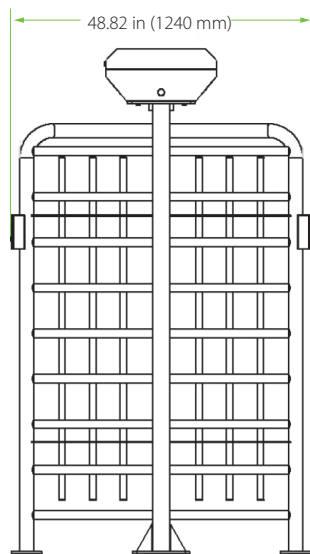

1600 Union Hill Road Alpharetta, GA 30005

Phone: (862) 505-2101 | Fax: (862) 204-5906 | info@zktecousa.com | www.zktecousa.com

© Copyright 2023. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.