

KASANAKI

SUSTAINABLE SILENT POWER

KTL-4

Deployable portable lighting
in one bespoke robust package.

PORTABLE LIGHT TOWER



KTL-4

Height

64,5cm ~ 220cm

Weight

10kg (Fitting only)

Power Supply

Battery / AC 100 - 277V

Lumens

0 - 17000 Lm

Run Times

>20hours (Standard mode, D24 - 100)

IP Grade

IP65

Output(USB)

5V 2A (2 Dock)

Battery System

D24 - 100

Battery (D24-100)

Rated Power

98Wh

Rated Voltage

24,5V

Rated Capacity

4,0Ah

Working Temperature

-10~50°C

Working Humidity

-1~98%



SPEEDY DEPLOYMENT MULTIPLE LIGHTING DISTRIBUTION




Single latch to release tripod
Deploy or fold in seconds





Self-locking Pole

Drag & Lock at any position, contraction in one push



Press down to fold the pole

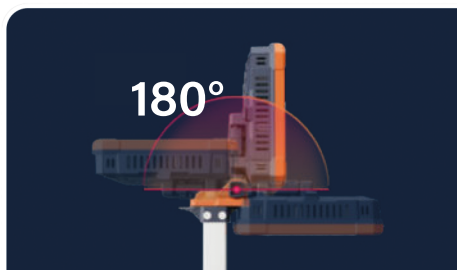

180°



180°



330°

360°+

up/down/left/right/adjustable

In built damping mechanism for ease of adjustment to cover lighting area required.



ULTRA-LONG ENDURANCE


Standard Mode Up To 20+ Hours

(3x D24-100)


Control Board




Application




Emergency




Infrastructure




Railway



Event




Maintenance




Mining



Sport



Construction

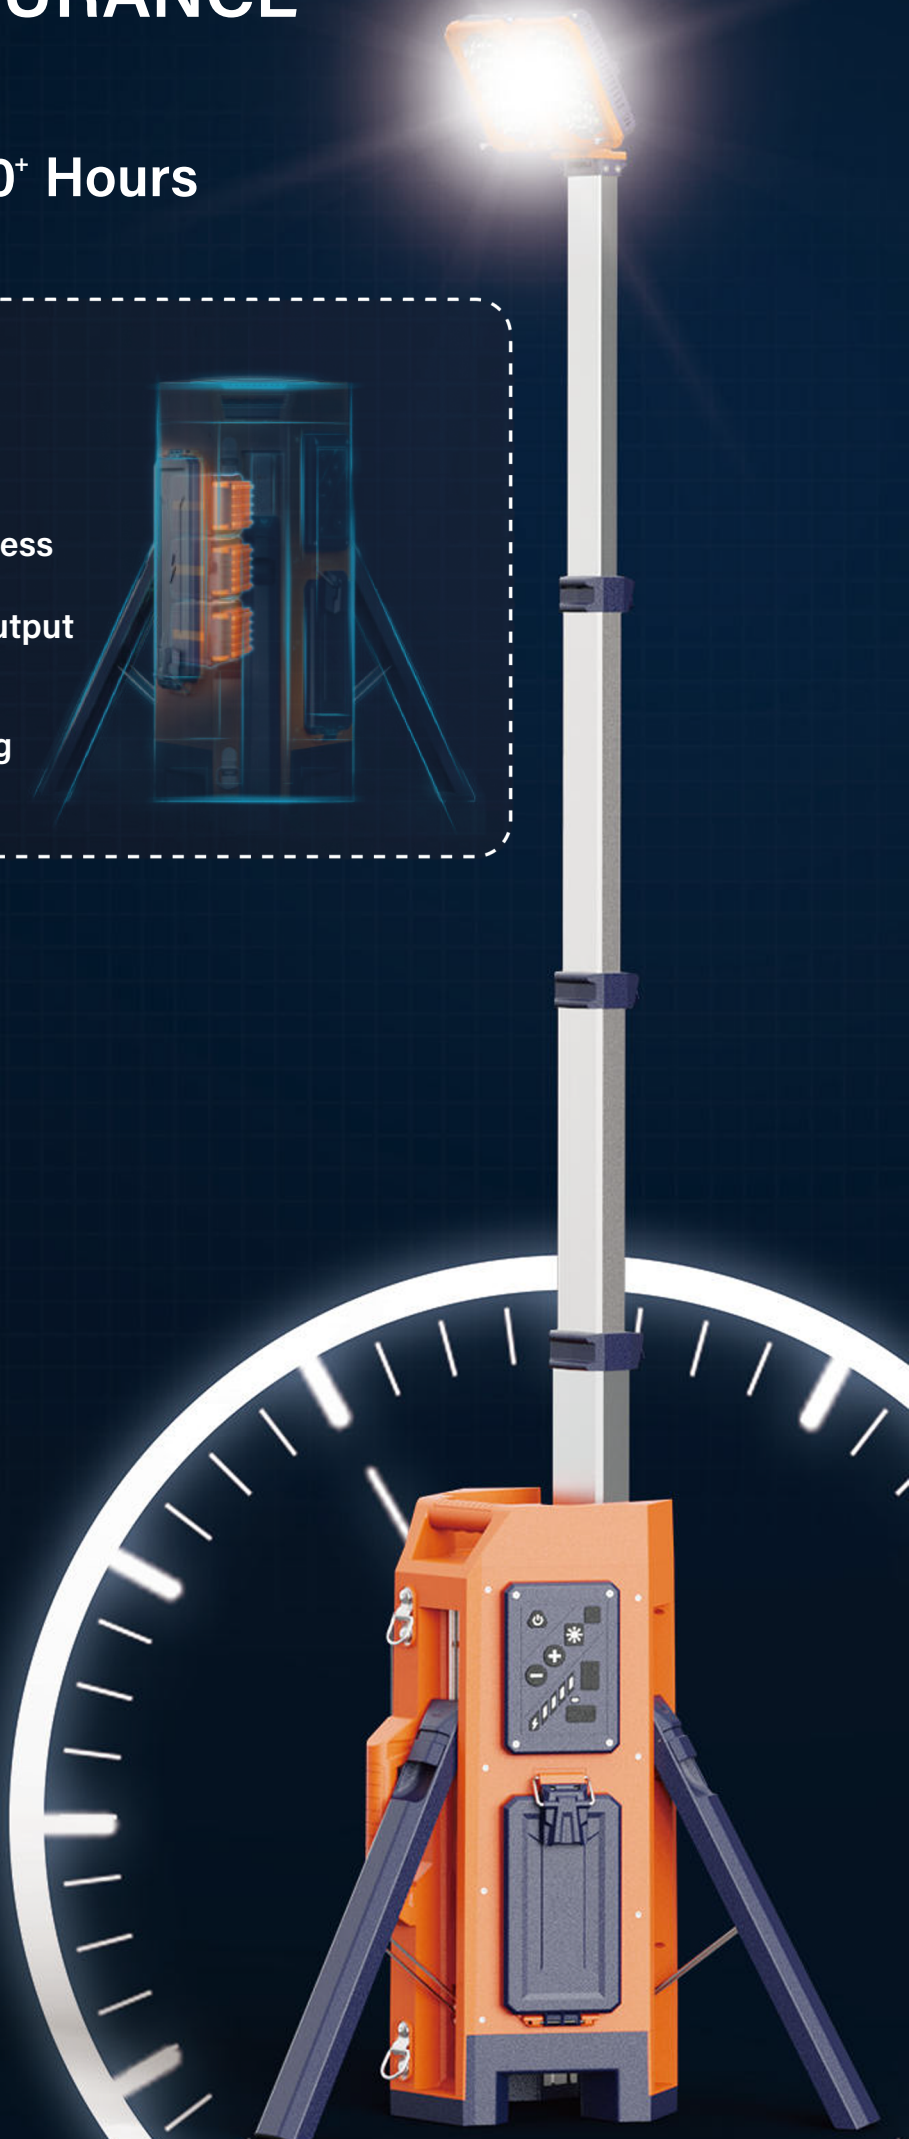


AC Powered

Up to 17,000_{LM}

Battery - powered

Up to 10,000_{LM}

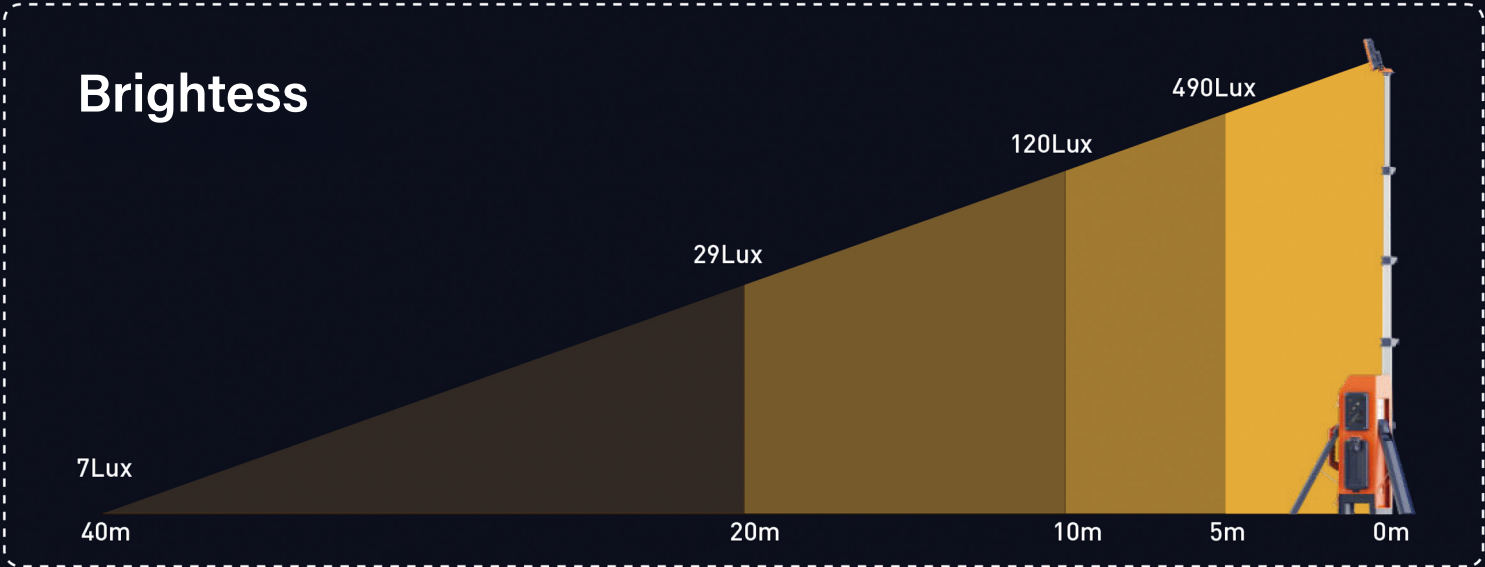

* 'Brightness' represents the center point illuminance value of the lighting direction.

AC	0-17,000LM Stepless Dimmable	
Battery (4 mode)	Turbo	10.000 _{LM}
	Standard	6,300 _{LM}
	Balanced	3,800 _{LM}
	ECO	1.000 _{LM}



Lighting area
1100 m²

KASANAKI
OFF-GRID POWER TECHNOLOGIES

* 'Lighting Area' represents the lighting area of which > 1lux

ONE - PERSON OPERATION

Transport, deploy, adjust lighting in seconds with one operator.



Dual handle & strap available, 10KG

