

# PRODUCT CATALOGUE

**TAYLOR**  
- ATTACHMENTS -

**2026 - 2027**





# A LITTLE BIT ABOUT US

Based in South Gloucestershire, Taylor Attachments are a family run business specialising in manufacturing a wide range of tractor and handler headstock conversion brackets alongside an expanding range of loader attachments. These are manufactured in-house and sold internationally to the commercial, industrial and agricultural markets.


All products are built to a very high standard and are independently tested to ensure they are more than capable of delivering their required expectations. The majority of the headstocks are manufactured using very highly accurate laser cutting technology to ensure a perfect fit to your existing attachments giving you peace of mind from the point of order through to the daily use of the product.

Visit the website and social media pages to keep up-to-date with the latest product launches or get in contact with us.

Taylor Attachments  
Grange Farm  
Latteridge  
Iron Acton  
Bristol  
BS37 9TP

01454 537338

[sales@taylorattachments.co.uk](mailto:sales@taylorattachments.co.uk)  
[accounts@taylorattachments.co.uk](mailto:accounts@taylorattachments.co.uk)

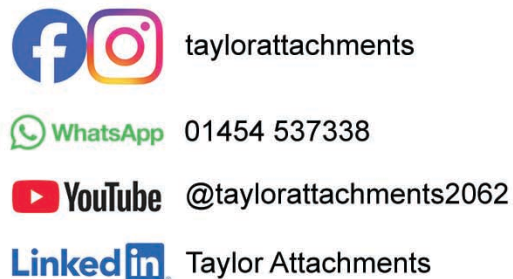



# CONTENTS

## MACHINERY HANDLING

|                                |       |
|--------------------------------|-------|
| Three Point Linkage Headstocks | 4 – 6 |
| Hooklifter                     | 7     |
| Eurolifter                     | 8     |

## BAG LIFTER

|                |   |
|----------------|---|
| Big Bag Lifter | 9 |
|----------------|---|

## BALE HANDLING

|                              |    |
|------------------------------|----|
| Twin & Triple Bale Spikes    | 10 |
| Quad & Flat Four Bale Spikes | 11 |
| Round Bale Squeeze           | 12 |

## PALLET FORKS

|                            |    |
|----------------------------|----|
| Floating Pallet Forks      | 12 |
| Pallet Forks               | 13 |
| Hydraulic Fork Positioners | 8  |

## HEADSTOCKS

|                                |         |
|--------------------------------|---------|
| Replacement Handler Headstocks | 16 - 17 |
| Replacement Loader Headstocks  | 18      |
| Slew & Linkage Headstocks      | 19      |
| Adapter Plates                 | 20 - 21 |

## TOWING

|                         |    |
|-------------------------|----|
| Ball Hitch Towing Frame | 22 |
| Heavy Duty Towing Hitch | 23 |

## GENERAL

|                                 |    |
|---------------------------------|----|
| Lifting Jib                     | 23 |
| Floating Yard Scraper Headstock | 24 |
| Man Platforms                   | 25 |

## BUCKETS

|                        |    |
|------------------------|----|
| Buckets                | 26 |
| MAXIMUS Toe Tip Bucket | 27 |

## MUCK HANDLING

|            |    |
|------------|----|
| Muck Grabs | 27 |
| Muck Forks | 28 |


## GRASS HANDLING

|                              |         |
|------------------------------|---------|
| FORTIS Silage Compactor      | 29      |
| THE FALCON Pushoff Fork      | 30      |
| TRITON & WARRIOR Grass Forks | 30 - 31 |





# THREE POINT LINKAGE HEADSTOCK

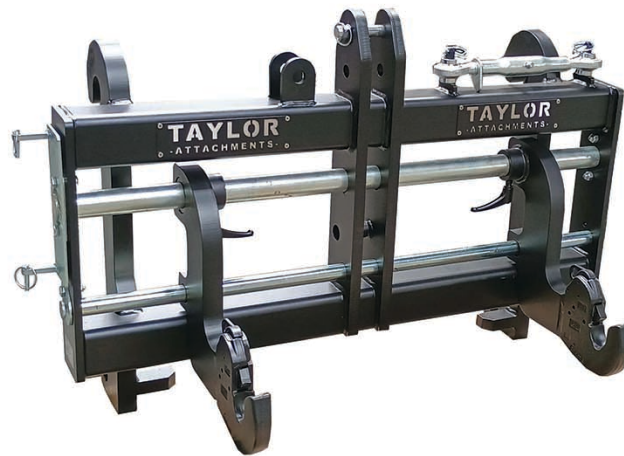

Our best-selling product, fully designed and manufactured by Taylor Attachments to act as a true 3 Point Linkage on the front of your loader or telehandler. Designed to be as compact as possible while providing a fully adjustable 3 Point Linkage.

This product can be used for a wide variety of jobs including machinery moving / loading, implement maintenance and repairs, and full use of implements (post knockers, buck rakes, snow ploughs and many more). The Lower link arms are easily adjustable and can be locked in place in seconds allowing rapid coupling to your implement.

Comes complete with adjustable top link.  
Can be fitted with any loader / telehandler brackets.



| Model      | SWL     | Link Arms  | Category Linkage | Brackets |
|------------|---------|------------|------------------|----------|
| 5T 3PT     | 5000kgs | Adjustable | CAT 2/3          | Any      |
| 8T 3PT     | 8000kgs | Adjustable | CAT 2/3          | Any      |
| 8T 3PT     | 8000kgs | Hydraulic  | CAT 2/3          | Any      |
| Light 3PT  | 1500kgs | Fixed      | CAT 1/2          | Loader   |
| Hooklifter | 5000kgs | Fixed      | None - Pads      | Any      |
| Eurolifter | 2500kgs | Fixed      | None - Pads      | Euro 8   |





## HYDRAULIC VERSION



Converts your handler or loader to pick up and use attachments on 3 Point Linkage, with the added convenience of hydraulic width adjustment.

This hydraulic version allows the lower link arms to be adjusted in the cab, making it quicker and easier than ever to connect to different implements.

Comes complete with adjustable top link.

Available with CAT 2/3 lower link arms.

## LIGHT VERSION

Converts your handler or loader to pick up and use attachments on 3 Point Linkage in a lighter, more compact design. This light version is ideal for smaller implements and lower lift requirements.

Comes complete with adjustable top link.

Available with CAT 1 or CAT 2 lower link arms.

CE Marked and tested to a Safe Working Load (SWL) of 1500 kgs.

Can be fitted with any loader brackets.








## Optional Extras-

### Hooklifter Kit

---

Turn your Three Point Linkage Headstock into one of our Hooklifters using our Hooklifter Kit.

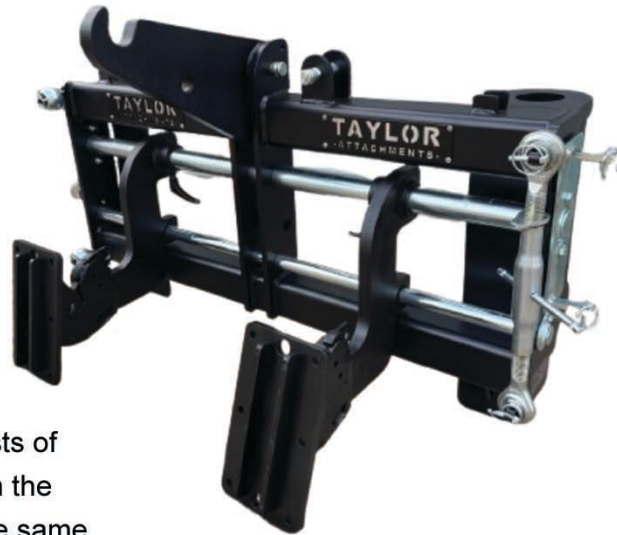

The Hooklifter Kit consists of 2 lower pads which sit in the lower link hooks, and the same strong top hook from our Hooklifter simply sits where the top link goes! All stores on the headstock for a quick swap over.

### Plastic Pads

---

For protecting the paintwork when moving new machinery.

Widely used by dealers.



### Removable Towing Clevis

---

For easy moving of trailed equipment. We offer a unique hitch which functions in either a fixed or floating position for ease of use, and fully removable with just one pin.



With our extended design you can achieve a near 90 degree turn.

### K80 Ball Hitch

---

Becoming increasingly popular our fully removable K80 ball hitch is invaluable for moving larger trailed equipment around.







# HOOKLIFTER



Expertly designed to be as compact as possible while providing sufficient clearance of PTO shafts.

CE Marked and tested to a Safe Working Load (SWL) of 5000 kgs (5 Tonnes).

Can be fitted with any handler brackets.



**No more straps and slings – Work safely and quicker with the Hooklifter**

Fully designed and manufactured by Taylor Attachments to easily move, carry and load 3 point linkage implements without leaving the cab!

This product can be used for a wide variety of jobs including machinery moving, loading, maintenance and repairs, for Farmers, Dealers and Manufacturers.



# EUROLIFTER

Fully designed and manufactured by Taylor Attachments to easily move, carry and load 3 point linkage implements without leaving the cab!

This product can be used for a wide variety of jobs including machinery moving, loading, maintenance and repairs, for farmers, dealers and manufacturers.


Expertly designed to be as compact as possible while providing sufficient clearance of PTO shafts.

Designed specifically for the front end loader and smaller handler market.

Comes complete with removable towing clevis.

CE and UKCA Marked and tested to a Safe Working Load (SWL) of (2.5 Tonnes).

Only available on Euro 8 brackets.

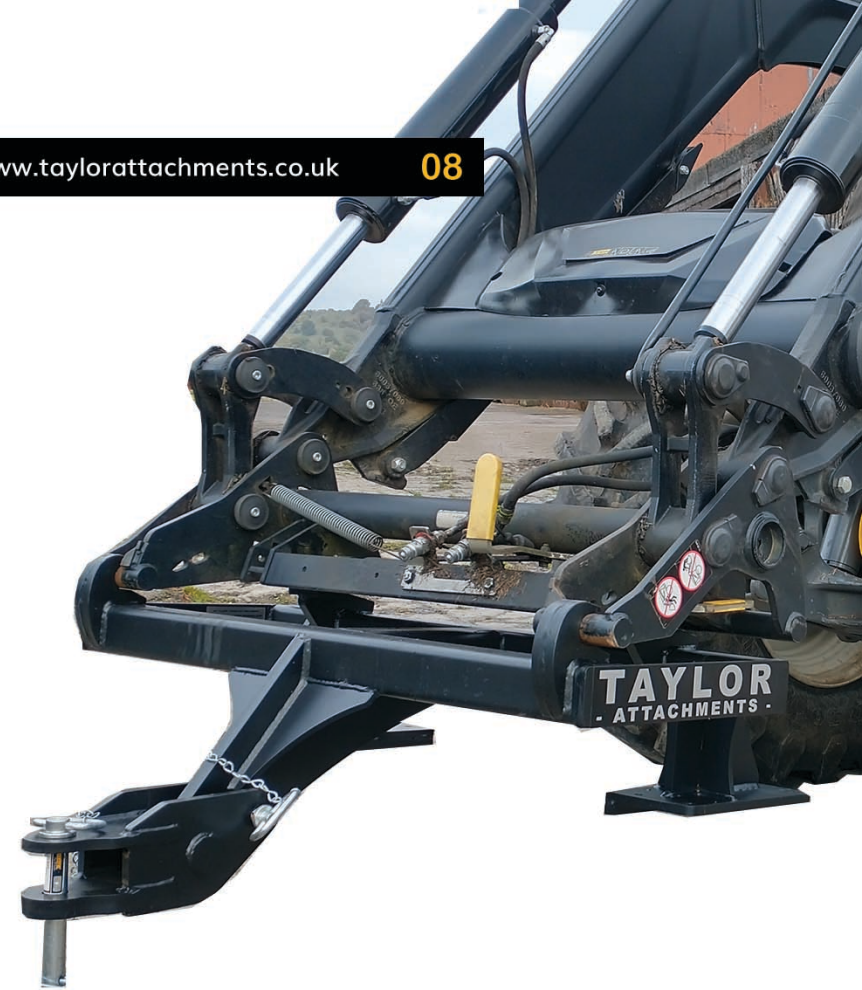





# BIG BAG LIFTER



A fully adjustable Big Bag Lifter designed to carry seed, fertiliser, sand, gravel and pretty much anything in a big bag!

Easily slide and lock the arms in place for different size bags.

Significantly reduces the height needed to lift bags to unload from lorries and stack in sheds.

1170mm arm centres at full width, and 1400mm long arms.

## Hydraulic Version

A Hydraulic Version is available, allowing the arms to be adjusted from in the cab, making it quicker and easier to handle different bag sizes without leaving your seat.



| Model                    | SWL     | Arms      | Brackets |
|--------------------------|---------|-----------|----------|
| Big Bag Lifter           | 2500kgs | Manual    | Any      |
| Hydraulic Big Bag Lifter | 2500kgs | Hydraulic | Any      |





# BALE SPIKES

A range of Twin, Triple and Quadruple bale spikes to cover a wide range of uses. Heavy duty construction featuring 8mm wall box section and your choice of brackets.

## Model - BSTW - Twin Bale Spike

- Conus 2 KV heavy duty spikes
- 820mm or 980mm long tines
- 750mm tine centres

| Model | Backrest |
|-------|----------|
| BSTW  | None     |



## Model - BSTR - Triple Bale Spike

- Conus 2 KV heavy duty spikes
- 820mm or 980mm long tines
- 550mm tine centres

| Model     | Backrest                      |
|-----------|-------------------------------|
| BSTR      | None                          |
| BSTR - FB | Fixed – 1250mm to 2100mm      |
| BSTR - B  | Adjustable – 1250mm to 2100mm |







### Model - BSQU - Quadruple Bale Spike

Conus 2 KV heavy duty spikes

- 980mm and 820mm long tines
- 1100mm tine centres

| Model     | Backrest                      |
|-----------|-------------------------------|
| BSQU      | None                          |
| BSTR - FB | Fixed – 1250mm to 2100mm      |
| BSTR - B  | Adjustable – 1250mm to 2100mm |



### Model - BSFF - Quadruple Flat Bale Spike

Conus 2 KV heavy duty spikes

- 980mm and 820mm long tines
- 510mm tine centres

| Model     | Backrest                                | Tine Folding                                                     |
|-----------|-----------------------------------------|------------------------------------------------------------------|
| BSFF      | None                                    | OPTION OF:<br><br>NONE,<br><br>MANUAL<br><br>OR<br><br>HYDRAULIC |
| BSFF – FB | Fixed – 1250mm to 2100mm                |                                                                  |
| BSFF – B  | Adjustable – 1250mm to 2100mm           |                                                                  |
| BSFF – HB | Hydraulic Adjustable – 1250mm to 2100mm |                                                                  |



Model - BSFF - B - No Folding



Model - BSFF - HB - Hydraulic Folding



# ROUND BALE SQUEEZE



Designed for safe, efficient handling of round bales without causing damage to the film or crop. The Taylor Round Bale Squeeze combines performance, protection, and reliability - making it the perfect choice for modern bale handling.

## Key Features:

- Smooth, rounded arms to protect bale wrap and maintain bale integrity
- Heavy-duty steel construction for maximum strength and longevity
- Hydraulic operation for effortless, secure clamping
- Available on a wide range of weld on or bolt on loader and telehandler brackets
- Suitable for both wrapped and unwrapped round bales
- The sleeves can act as a backrest, as shown in the picture below
- Recessed pins to avoid catching plastic wrap
- No tools required to remove sleeves.



# FLOATING FORK CARRIAGE



## Key Features:

- Can be supplied with bar and forks
- Floating design allowing easy moving of pallets on uneven ground.
- Bracket fitted for folding forks up while travelling on roads.
- Telehandler or loader bracket versions available

| Bar Dimensions | SWL     |
|----------------|---------|
| 45mm           | 2000kgs |
| 50mm           | 4500kgs |
| 57mm           | 4500kgs |
| 6T Rated 57mm  | 6000kgs |



# PALLET FORK CARRIAGES



Pallet forks for tractor loaders, forklifts and telehandlers.

Available in class 2 and class 3.


CE Marked.

Can be fitted with any brackets.

| Model      | SWL     |
|------------|---------|
| Class 2    | 2500kgs |
| Class 3    | 4500kgs |
| 6T Class 3 | 6000kgs |

Carriages can be supplied with or without forks.

Forks are also available separately at competitive prices.

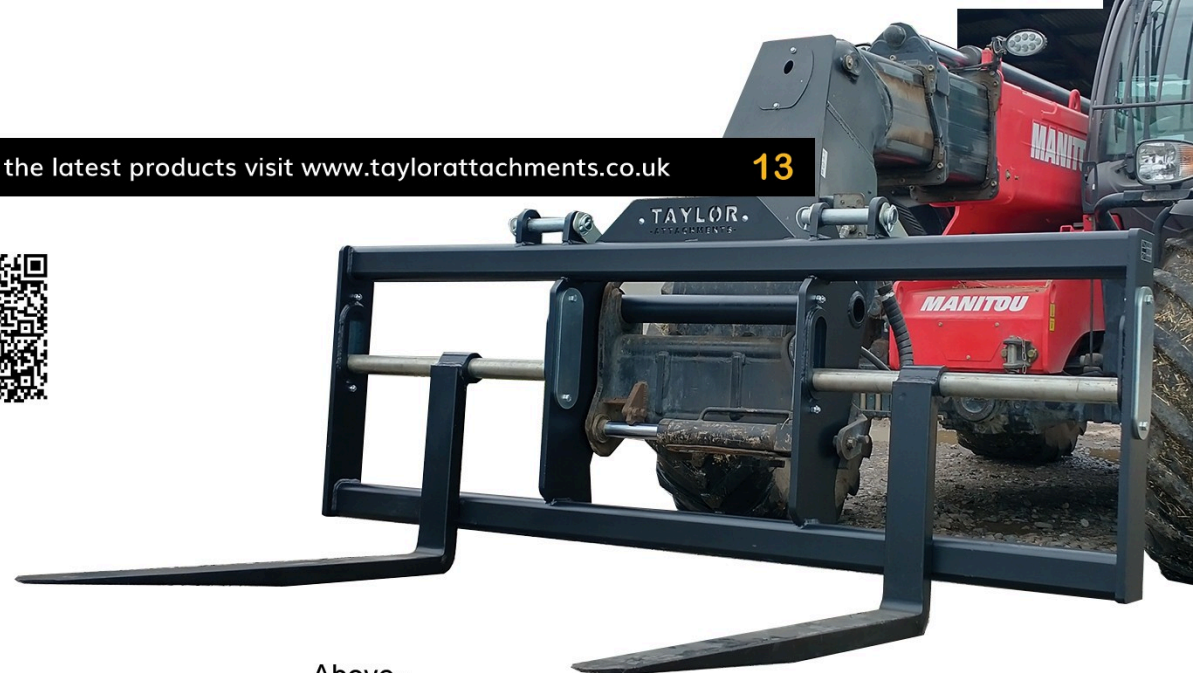

Above -

**Shipping Container Forks:**

Available in different widths to accommodate any requirements.

# MERLO FORK CARRIAGES

Simply leave your Merlo pallet forks on this frame and hitch them on using the standard quick hitch.





# HYDRAULIC FORK POSITIONERS

Width adjustable forks simultaneously position themselves under control from the machines hydraulic service.

## Floating Type:

The forks are still able to be folded up and secured for safety when transported on public roads. Supplied with fork retaining brackets. 4.5t safe working load.

## Standard Specifications:

- 1200mm long tines.
- Width adjustable forks from 260mm - 1200mm (outsides).
- Choice of handler or loader brackets.

## Options:

- Removable backrest (various heights available).
- Up to 2400mm long forks.
- Carriage can be offered at wider widths.

All offered with the high standard of build quality, design and service you can expect from Taylor Attachments.

| Model                  | SWL     |
|------------------------|---------|
| Class 2                | 2000kgs |
| Class 3                | 4500kgs |
| 57mm Floating          | 4500kgs |
| 6T Rated 57mm Floating | 6000kgs |







## RORO SKIP HOOK



Commonly used in green waste and recycling industries for a speedy and safe way of moving empty 'roll on-roll off' skips. We've been told these save huge amounts of time and costs compared to using the lorries to manoeuvre the skips.

Features an elongated hook to allow turning of the skip without pinching or causing damage to either the skip or the frame.

Only to be used to manoeuvre empty skips.

Your choice of handler brackets.

Excellent forward visibility.






# REPLACEMENT HANDLER HEADSTOCKS

We are now able to offer complete replacement headstocks for all makes and models of handlers.

We use the latest state of the art 3D scanning technology to scan and replicate existing fitment patterns of headstocks to create our own perfectly fitting replacements using our proven tested designs to seamlessly integrate with your machine.

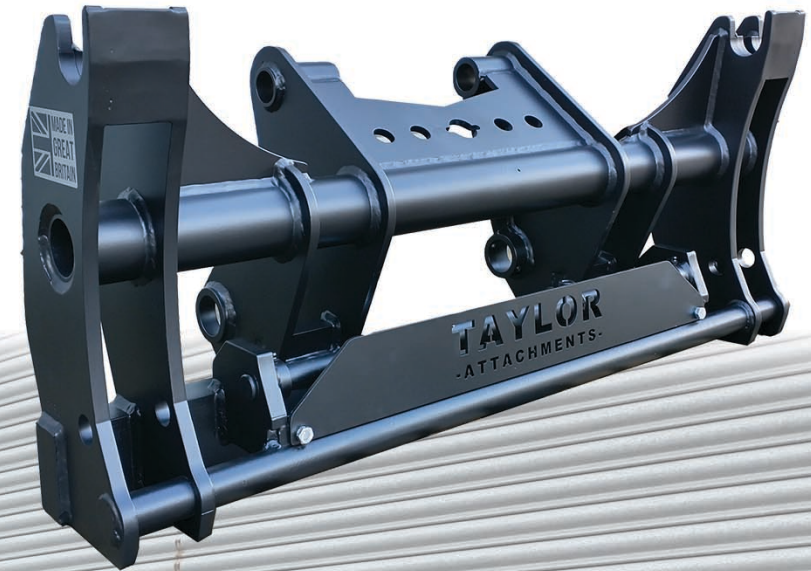

Whether its to replace worn out headstocks, change headstock type when you buy a second hand machine, or commonly fitted to new machines by dealers.



A wide selection often in stock for common variations.

For all the latest products visit [www.taylorattachments.co.uk](http://www.taylorattachments.co.uk)

17



**TAYLOR**  
-ATTACHMENTS-





# REPLACEMENT LOADER HEADSTOCKS

With our vast drawing database we can manufacture a new headstock for your front end loader with the knowledge of a perfect fit each time. If we don't have the drawings we can use our state of the art 3D scanning tools to produce one for you.

Available with either manual or hydraulic locking.





## SLEW HEADSTOCKS

Fit an agricultural or industrial headstock to your 360 digger for a wide range of uses.

**We can fit any size slew brackets to any of our headstocks with either manual or hydraulic locking options.**



## LINKAGE MOUNTED HEADSTOCKS


Our range of headstocks mounted on your three point linkage. These are commonly used on the front linkage of tractors especially when a hydraulic top link is used.







# HEADSTOCK ADAPTER PLATES

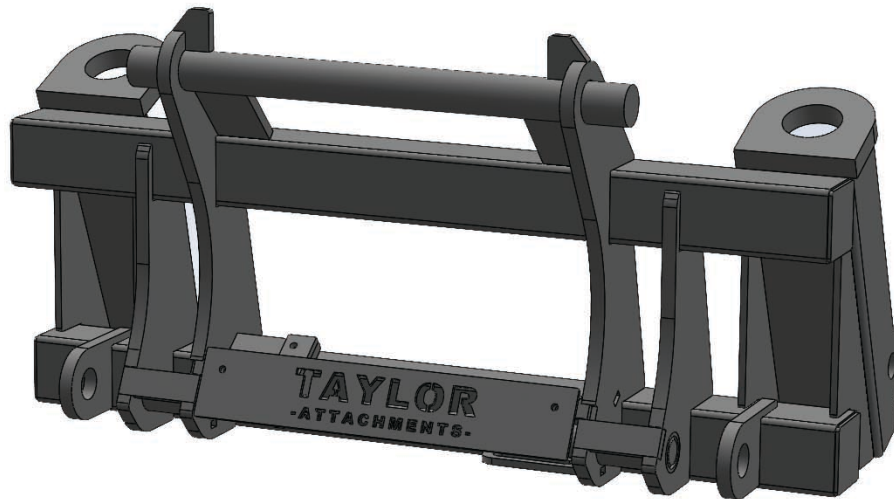

We specialise in loader and telehandler headstock adapters. As one of the market leaders in these products, you can be assured that when you order an adapter from us, you'll receive a product that won't let you down.

## Why choose an adapter from us?

We design and manufacture all of our adapter plates in-house here in the UK.

Our adapter plates are designed to be as compact as possible to reduce the amount of forward leverage on your loader, minimising any reductions in lifting capacities.

Where possible we ensure the geometry of our adapter plates match as best as possible to the combination you require, keeping your tipping and crowd angles as they should be.

We have the largest stock of adapter plates on the shelf in the UK, stocking over 70 common adapter plates ready for next day delivery



We can offer both manual, or hydraulic locking adapters at very competitive prices.

All of our adapter plates are load tested well in excess of their required limits to ensure they can withstand the modern workload expected of them.





A small selection of the most popular adapters often available from stock.

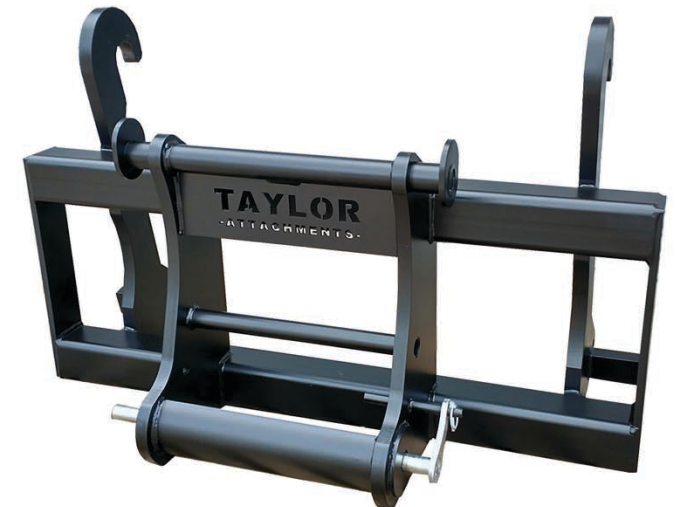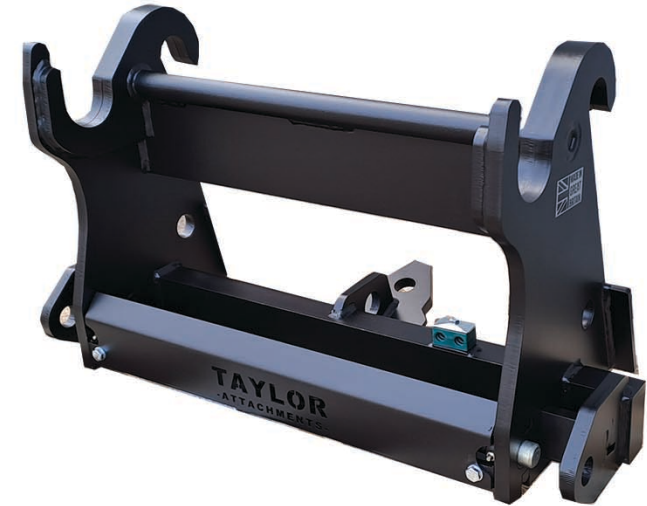

There are many more than we can list in this catalogue, so please contact us with your requirements.





# HEAVY DUTY BALL HITCH TOWING FRAMES

A heavy duty frame fitted with a 50mm ball and jaw, ideal for a safe and easy way to manoeuvre trailers and caravans.



Commonly sold to public sector organisations for the safe moving of trailers and bowzers around sites.

Great forward visibility and offering over 90 degree turns.

Available on your choice of handler or loader brackets.







# HEAVY DUTY TOWING HITCH

Designed to meet the need to move increasingly larger equipment on and off lorries, around yards and workshops and for tucking those balers away in winter!

- 100mm deep clevis
- 32mm drawbar pin included
- 90mm clearance from centre of pin
- Over a 90 degree turn achievable

Available with any choice of handler brackets



# LIFTING JIB



Heavy duty lifting jibs available on your choice of handler brackets

Up to 6t SWL @ 1500mm and 3t SWL @ 2000mm

Strong and robust design.

Comes complete with certificate of conformity.







# FLOATING YARD SCRAPER HEADSTOCK



A very popular product fully designed and manufactured by Taylor Attachments to use your existing yard scraper on the front of your loader or handler.

A very affordable way to use standard rear mounted yard scrapers on the front of your loader or handler.

Watch videos of this in action on our website-  
[www.taylorattachments.co.uk](http://www.taylorattachments.co.uk)



Expertly designed to float when in use to reduce rubber wear on your scraper.

Excellent forward visibility when scraping.

Minimal loader movements required when scraping - no precise lowering needed, the floating system takes care of this.

Fully width adjustable for Category 1 and 2 yard scrapers.

Can be fitted with any loader / handler brackets.





# MAN PLATFORMS

A safe method of working at height.

Very robust and rigid man cage built to the high standard expected from Taylor Attachments.

Fully compliant with the HSE PM28 regulations, our man cages offer a safe method of working at height.

Galvanised Version often in stock.

## Specifications include:

- 2400mm x1100mm external frame with protective rear guard.
- Durbar tread plate floor for extra grip in wet conditions.
- Large tool tray with drain holes.
- Full length harness rail for added safety.
- Spring latched and spring loaded self closing door.
- Folded sections around the front and sides for structural longevity.
- Tested to a safety factor of over 3, ensuring a SWL of 500kg.
- Supplied with test certificate.
- Fitted with fork sleeves as standard.
- Optional bolt on loader brackets available.

Primed and finished in our usual high quality black paint upon request.







# BUCKETS

## GP Range-

150x16 HB500 Genuine HARDOX leading edge  
HARDOX rear wear blocks  
5mm complete shell - folded for strength  
150 x 12 mm wrap around strapping

## HD Range-

Tackle the most demanding conditions with our Heavy Duty range of buckets. Using 8mm steel these deliver a significantly longer operating life withstanding the workload required and expected in modern agriculture.

150x20 HB500 Genuine HARDOX leading edge  
HARDOX rear wear blocks  
8mm floor and sides to form the shell - folded for strength  
150 x 12 mm wrap around strapping

Stock Sizes - Other Sizes Available To Order.

| Model | Range | SWL               |
|-------|-------|-------------------|
| 6FT   | GP    | 0.5m <sup>3</sup> |
| 7FT 6 | GP    | 1.5m <sup>3</sup> |
| 7FT 6 | GP    | 2m <sup>3</sup>   |
| 7FT 6 | HD    | 1.5m <sup>3</sup> |



Bucket Brushes available in a range of sizes!







# THE MAXIMUS

Our New High Tip Bucket!

## Key Features:

- Remote grease banks for easy access
- Extremely hardened heavy duty pins

Available in sizes 1.5m cube to 5m cube



# MUCK GRABS



The Ferox Heavy duty muck grab range is built to the high standard expected from Taylor Attachments.

Our muck grabs provide excellent grip and strength for handling muck, silage, and other loose materials with ease.

## Specifications include:

- Heavy duty frame for maximum durability.
- High quality Conus 2 KV heavy duty tines for strength and penetration.
- Double-acting hydraulic cylinders for powerful clamping force.

Range of sizes available to suit different machines.

Manufactured with your choice of brackets to suit all leading loaders and handlers.





# MUCK FORKS

**A tough and dependable fork for everyday muck work!**

Designed for strength, durability, and ease of use, our muck forks are ideal for moving muck, silage, and general waste materials.

**Specifications include:**

- Heavy duty main frame with reinforced design.
- High quality Conus 2 KV or HARDOX heavy duty tines.
- Optimised tine spacing for efficient muck handling.
- Welded back guard for increased rigidity and operator safety.
- Shot blasted, primed and finished in our usual high quality black paint.

Available in a range of widths to suit various machines.

Manufactured with your choice of brackets to suit.







# FORTIS SILAGE COMPACTOR

Engineered for professional silage operations, our Silage Compactor is available in 3000 mm or 3500 mm widths to suit a variety of clamp sizes.

With a 914 mm drum diameter and 1258 mm ring diameter, it delivers outstanding consolidation for improved forage quality and reduced spoilage.

The drum features baffle plates allowing partial water filling, giving operators control over the working weight for different conditions. Nylon corner roller guards provide added protection and longevity.



Practicality is built in with a full rear lighting kit for safe transport, and compatibility with both Category 2 and Category 3 linkages. An optional handler bracket kit allows mounting on the front of a loader.

The FORTIS 3500V features a Volvo / Three Point Linkage combination bracket, allowing operation with tractors and volvo loaders.

Robust, reliable, and designed for today's modern silage demands, this compactor is the perfect tool for achieving a consistently firm, high-quality clamp.

| Model        | Width | Empty Weight | Max Weight | Brackets          |
|--------------|-------|--------------|------------|-------------------|
| FORTIS 3000  | 3m    | 2400KG       | 4400KG     | CAT 2 / 3         |
| FORTIS 3500  | 3.5m  | 2900KG       | 5500KG     | CAT 2 / 3         |
| FORTIS 3500V | 3.5m  | 2900KG       | 5500KG     | VOLVO & CAT 2 / 3 |





# THE FALCON

## The Ultimate Pushoff Fork!

The Falcon range can handle high quantities of forage material and carry it up the pit with ease, and can be used on tractors or loaders.

### Key Features:

- Solid Steel Push Off Gate
- Visibility Slots
- Hardox Tines
- Reflective Safety Strips
- Greasable Bushings On All Pivot Points
- Wear Strips Under Chassis
- Soft Close Hydraulic Cylinders

| Model        | Capacity          | Weight |
|--------------|-------------------|--------|
| 9FT          | 5.4m <sup>3</sup> | 1390KG |
| 10FT         | 6.1m <sup>3</sup> | 1550KG |
| 12FT         | 7.3m <sup>3</sup> | 1630KG |
| 12FT FOLDING | 7m <sup>3</sup>   | 2510KG |
| 14FT         | 9m <sup>3</sup>   | 1738KG |
| 14FT FOLDING | 9m <sup>3</sup>   | 2738KG |



# THE TRITON

## Super Lightweight Grass Fork!

The Triton range was designed with a Hardox super lightweight chassis, making it the most versatile silage fork on the market. with the ability to work on various loaders ranging from 5,000kg up to 19,000kg.

### Key Features:

- HD one piece chassis for extra strength and wear life
- Soft close hydraulic cylinders
- Wing lock in pins for road transport
- Counter balance load hold valve for locking of hydraulic cylinders
- Torque bolted hinge points
- Bottom rounded tine wear shoes



| Model | Capacity          | Weight |
|-------|-------------------|--------|
| 9FT   | 5.4m <sup>3</sup> | 760KG  |
| 10FT  | 6.1m <sup>3</sup> | 810KG  |
| 12FT  | 7.1m <sup>3</sup> | 1000KG |
| 14FT  | 8.2m <sup>3</sup> | 1250KG |







# THE WARRIOR

**Market leading Grass Fork For Strength, Design and Performance.**

## Key Features:

- 14"/350mm tine centres for easy flow of forage through the fork
- 6ft/1.8m 2"/50mm tines as standard to carry more forage up the clamp
- 2"/50mm weld in side tine as standard
- HD one piece chassis for extra strength and wear life
- Soft close hydraulic cylinders
- Removable see through headboard as standard
- Wing lock in pins for road transport
- Counter balance load hold valve for locking of hydraulic cylinders
- Torque bolted hinge points
- Bottom rounded tine wear shoes

## Optional Extras:

- Road transport guard
- Personalised fork wing guards
- Maize/corn blade
- Personalise your road transport guard
- Lighting kit
- Extra long 5.6" / 1.7m tines
- Double side tines



| Model | Transport Width | Capacity           | Weight |
|-------|-----------------|--------------------|--------|
| 12FT  | 9.8ft           | 9.2m <sup>3</sup>  | 1550KG |
| 14FT  | 9.8ft           | 10.2m <sup>3</sup> | 1870KG |
| 16FT  | 9.8ft           | 11.1m <sup>3</sup> | 2290KG |



LEAVE US A REVIEW!



Scan the QR code with your mobile device

YOUR LOCAL STOCKING DEALER-



[www.taylorattachments.co.uk](http://www.taylorattachments.co.uk)