




Every detail guaranteed™

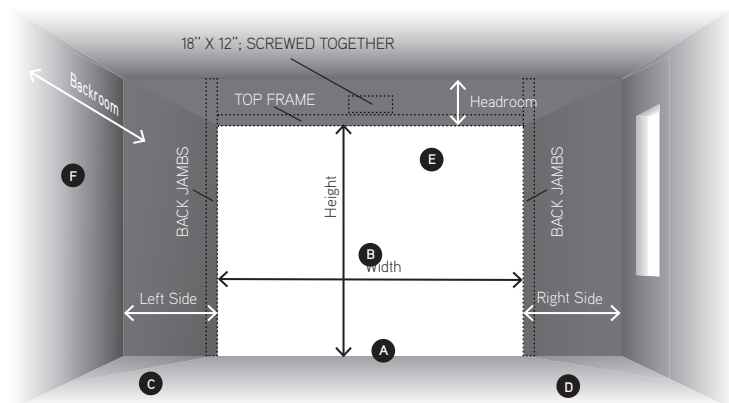

Take measurements

- 1) Measure existing door opening's width **A** and height **B** in feet and inches. This determines the size of door needed. Never base your measurements on the size of the existing door but on the door's opening instead.

A _____

B _____

- 2) Measure for sideroom, left side **C** and right side **D**.

- 6 inches is required on each side for installation of vertical track.
- Make sure no entry door will interfere with the horizontal track of the door.

C _____

D _____

- 3) Measure area labeled "headroom" **E**. Distance between the top of the door opening and the ceiling (or floor joist);

- 8 1/2" is required for standard extension spring.
- 12" is required for standard torsion spring.

- Add 2" more for electric opener.

- If you have restricted headroom, special hardware is available.

NOTE: If door height extends above the opening, the headroom measurement should be taken from the top of the top panel to the ceiling.

E _____

- 4) Measure area labeled "backroom" **F**. Distance is measured from the garage door opening toward the back wall of the garage.

- Door height plus 28" is required.
- Additional backroom (door height + 48") may be required for installation of an automatic garage door opener.
- Make sure no lighting or other material will interfere with the door sections when moving.

F _____

Getting the opening ready

- 1) Make sure the size of the opening matches the size of the door. For example: a door of 9' x 7' needs an opening of 9' wide by 7' high.
- 2) The position of the header (2" x 4") and back jambs (2" x 6") are very important. The header must be flush with back jambs (on the same plane). The back jambs must be perpendicular, plumb and square

For more details, visit www.garaga.com/measures

Garaga's Product Line

	Metal thickness	Door thickness	Insulation	"R" Factor	Choice of models	Choice of color	Warranty (limited)
Eastman Estate	Steel 26-gauge	2 ¾" (60 mm)	Polyurethane	R-16	6	8	Lifetime
Cambridge	Steel 26-gauge	2 ¾" (60 mm)	Polyurethane	R-16	3	8	Lifetime
North Hatley	Steel 26-gauge	1 ¾" (45 mm)	Polyurethane	R-16	2	9	Lifetime
Stratton 138	Steel 26-gauge	1 ¾" (35 mm)	Polyurethane	R-12	2	5	Lifetime
Standard+	Steel 26-gauge	1 ¾" (45 mm)	Polyurethane	R-16	5	9	Lifetime
Acadia 138	Steel 26-gauge	1 ¾" (35 mm)	Polyurethane	R-12	5	5	Lifetime
H-Tech	Aluminum 0.60 mm	1 ¾" (45 mm)	Polyurethane	R-16	3	8	Lifetime
California	Aluminum frame	1 ¾" (45 mm)	Non-insulated	--	1	3	Lifetime
Top Tech	Steel 23-gauge	1 ¾" (45 mm)	Polyurethane	R-16	1	1	Lifetime
Triforce	Steel 26-gauge	2" (50 mm)	Polystyrene	R-10	5	6	Lifetime
Dualforce	Steel 24-gauge	2" (50 mm)	Polystyrene	R-6.6	3	4	15 years
Uniforce	Steel 24-gauge	2" (50 mm)	Non-insulated	--	3	4	15 years

For all technical specifications for the Garaga's products and the latest updates, visit www.garaga.com