
Red Dot Gun Sight

### **Features**

- Thermal: <40 mK, QVGA or VGA High Resolution
- 1x 8x Digital Magnification
- Viewing Window for Quick Targeting
- Al Image Recognition Assisted Targeting
- Support Wireless Transmission
- Can Operate in Total Darkness
- 350g Ultra-Lightweight Design
- Passive Device, Detecting without Harming
- MIL-STD-810G

# **Appearance**



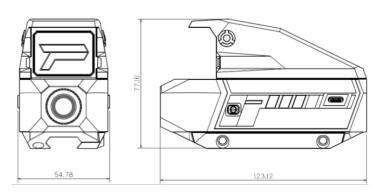

Red Dot Gun Sight

## **Revision Table**

| Date     | Revision | Content     | Ву      |
|----------|----------|-------------|---------|
| 2025/8/7 | 0.1      | First Draft | Zoe You |



Red Dot Gun Sight

# **Specification**

| Sensor                | Thermal Sensor                               |
|-----------------------|--|
| Lens                  | 25mm Lens                                    |
| Resolution            | 640 × 512                                    |
| Spectral Range        | 8 to 14μm                                    |
| NETD                  | ≤ 40mK                                       |
| Frame Rate            | 60 fps                                       |
| Signal-to-Noise Ratio | 56dB   |
| Shutter Design        | Software-Controlled, Near Shutterless Design |
| Digital Zoom          | 9-Level Digital Zoom                         |
| Noise Reduction       | Support                                      |
| Color Palettes        | White Hot, Black Hot, Red Hot                |
| Battery               | Bulit-In 3000mAh                             |
| Power Input           | Type-C, 5V / 3A                              |
| Power Consumption     | 3.5 W  |
| Ingress Protection    | IP54   |
| Dimension             | 123.12 x 54.78 x 77.16 mm                    |
| Weight                | 320g   |

Red Dot Gun Sight

# **Environment Compliance**

| Operating Temp. | -10°C to +60°C               |
|-----------------|------------------------------|
| Storage Temp.   | -20°C to +80°C               |
| Humidity        | 5% - 95% RH (Non-Condensing) |
| Shock           | MIL-STD-810G Compliant       |
| Vibration       | MIL-STD-810G Compliant       |
| EMI/EMC         | MIL-STD461E/F Compliant      |

Environmental performance may vary according to the integration method or final integration scenario.

## **Deliverables**

1 Red Dot Gun Sight

# **Ordering Information**

| Model Name | Description       | Unit |
|------------|-------------------|------|
| MIC-OTH03  | Red Dot Gun Sight | 1    |

#### Disclaimer

This datasheet is for informational purposes only and does not constitute professional advice, a contractual obligation, or a guarantee of any kind. While efforts have been made to ensure accuracy, ACT POWER TAIWAN makes no representations or warranties, express or implied, regarding its completeness or reliability. ACT POWER TAIWAN reserves the right to update, modify, or withdraw this document at any time without prior notice. Users should verify the suitability of the product for their specific application through independent testing and validation. ACT POWER TAIWAN shall not be liable for any direct, indirect, or consequential damages arising from the use of this document.