


MIC-S0301

19" 3U Rugged Server

Features

- 3U 19" Rack Mount Type Server
- Intel Xeon Gold G230 Processor, 20 Cores, 40 Threads
- Up to 256GB Capacity Each Slot, 12 DIMM Slots
- Supports DVI-D, HDMI, VGA Output
- MIL Circular Connector with Dust Caps
- -30 to +55 °C Operating Temperature
- Designed to Meet MIL-STD-810 & MIL-STD-461

Appearance

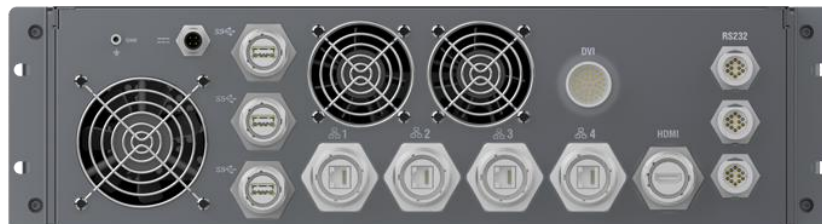



MIC-S0301

19" 3U Rugged Server

Revision Table

Date	Revision	Content	By
2022/3/27	0.1	Basic	Dennis

MIC-S0301

19" 3U Rugged Server

Specification

Chassis	Rugged 3U 19" Rack Mount Server
Main Board	Server Grade/ Work Station Grade Main Board
Chipset	Intel® C621
Processor	Intel® Xeon® Gold 6230 Processor, 20-cores, 40-threads 2.1 to 3.7GHz Frequency 42MB Cache Memory
Memory	Total 128 GB ECC DDR4 2933MHz pre-mounted Up to 256 GB capacitive each slots, 12 DIMM slots
Graphics	1 ASPEED AST2500 GEFORCE GT 710 2GB DDR3 64-bit graphics RAM 1 x DVI-D supports up to 4096x2160 1 x HDMI supports up to 4096x2160 1 x VGA supports up to 2048x1536
Storage	M.2 Interface: 4 PCIe 3.0 x4, RAID 0 & 1 Form Factor: 2242/2260/2280/22110 Key: M-Key M.2 support RAID 0,1(up to RAID 5, 10), VROC key is required for Raid 2 TB M.2 SSD pre-mounted
PCI-E	4 PCIe 3.0 x16, 3 PCIe 3.0 x8 (in x16 slot) (2 has been occupied Display card and LAN extension)
I/O ports rear (MIL Circular) With dust caps with cable secured	4 x LAN with D38999 military connector 3 x USB2.0 with D38999 military connector 3 x RS232 with D38999 military connector 1 x HDMI with D38999 military connector 1 x DVI-D with D38999 military connector 1 x AC with D38999 military connector
I/O ports front Buttons	1 x On/ OFF button 1 x Reset button 2 x LED indicators

MIC-S0301

19" 3U Rugged Server

Specification

Supported OS	Linux
OS	Red Hat Enterprise Linux WS v8.0 or above with 1 year RHN
Cooling	Forced air cooling with high speed, high volume fans
Dimensions	3U – 17.5" x 24" x 3.5 (W x L x H)
Weight	Approx. 15kg
Power	Power consumption: Approx. 200 Watts Power supply: Dual 550W Redundant power supplies Supports Automatic Power on State in BIOS Power input: AC 90-264V input

Environment Compliance

Operating Temp.	-30°C to +55°C
Storage Temp.	-40°C to +70°C
Humidity	240 Hours or better MIL-STD-810, Humidity, Method 507, Procedure II
EMI/EMC	MIL - STD-461E, RE 102, CE 102 Compliant or better
Shock	20g, 11 msec - Functional Shock or better 40g, 11 msec Crash Hazard Shock or better MIL-STD-810, Shock, Method 516, Procedures I/V
Vibration	4.43 grms, 5-500 Hz, 75 Min/Axis or better MIL-STD-810, Vibration, Method 514, Procedure I
Altitude above sea level	15000ft operation, 40,000 ft Transport or better MIL-STD-810, Altitude, Method 500

Environmental performance may vary according to the integration method or final integration scenario.



MIC-S0301

19" 3U Rugged Server

Ordering Information

Model Name	Description	Unit
MIC-S0301	19" 3U Rugged Server	1

Disclaimer

This datasheet is for informational purposes only and does not constitute professional advice, a contractual obligation, or a guarantee of any kind. While efforts have been made to ensure accuracy, ACT POWER TAIWAN makes no representations or warranties, express or implied, regarding its completeness or reliability. ACT POWER TAIWAN reserves the right to update, modify, or withdraw this document at any time without prior notice. Users should verify the suitability of the product for their specific application through independent testing and validation. ACT POWER TAIWAN shall not be liable for any direct, indirect, or consequential damages arising from the use of this document.