


SLM-MR050M-E

5" Capacitive Multi Touch LCD Open Frame

Features

- Operating Temperature: -20°C To $+70^{\circ}\text{C}$
- Storage Temperature: -30°C To $+80^{\circ}\text{C}$
- Optical Bonding: EMI Mesh With Optical Bonding
- LED Life Time: 50,000 Hours (Min)
- EMI/EMC Is Designed to Meet ML-STD-461E/F
- Shock Is Designed to Meet MIL-STD-810D
- Vibration Is Designed to Meet MIL-STD-810E

Appearance

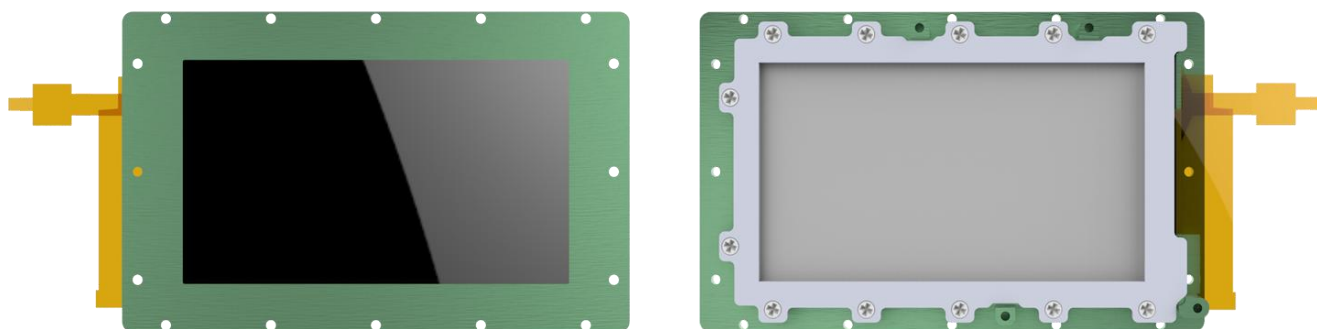



SLM-MR050M-E

5” Capacitive Multi Touch LCD Open Frame

Revision Table

Date	Revision	Content	By
2021/3/30	0.1	Basic	Dennis
2023/5/4	0.2	Updated Design Drawings [Turn into Open frame, client requires to stay the same Model Name]	Dennis
2023/8/27	0.3	Revise Datasheet Layout	Dennis

SLM-MR050M-E

5" Capacitive Multi Touch LCD Open Frame

Specification

LCD Panel	
LCD Size	5 inch TFT
Backlight	LED
Resolution	720 x 1280
Interface	MIPI 4 lanes
View Angle	$\pm 80^{\circ}$ (H), $\pm 80^{\circ}$ (V)
Luminance	700 nits (After Bonding)
Contrast Ratio	800:1
Aspect Ratio	16:9
Response Time	30 ms
No. of color	16.7 M
Active Area	62.10 (H) x 110.40 (V) mm
Pixel Pitch	0.08625 (H) x 0.08625 (V)
LED Life time	50,000 Hrs
EMI Mesh	Yes
Optical Bonding	Yes
Touch Panel	
Touch Type	Capacitive Multi Touch
Active Area	110.25 x 62.10 mm
Touch Interface	I2C
Cover Glass	AR Coating, Strengthen Glass
Touch Drives	Support Linux, Windows, Mac, etc.



SLM-MR050M-E

5" Capacitive Multi Touch LCD Open Frame

Environment Compliance

Operating Temp.	-20°C to +70°C
Storage Temp.	-30°C to +80°C
Humidity	Ta≤40°C, 95%RH, non-condensing
Shock	Design to meet MIL-STD-810D
Vibration	Design to meet MIL-STD-810E
EMI/EMC	Design to meet MIL-STD461E/F

Environmental performance may vary according to the integration method or final integration scenario.

Deliverables

1	5" Capacitive Multi Touch LCD Open Frame
---	--

Ordering Information

Model Name	Description	Unit
SLM-MR050M-E	5" Capacitive Multi Touch LCD Open Frame	1

Disclaimer

This datasheet is for informational purposes only and does not constitute professional advice, a contractual obligation, or a guarantee of any kind. While efforts have been made to ensure accuracy, ACT POWER TAIWAN makes no representations or warranties, express or implied, regarding its completeness or reliability. ACT POWER TAIWAN reserves the right to update, modify, or withdraw this document at any time without prior notice. Users should verify the suitability of the product for their specific application through independent testing and validation. ACT POWER TAIWAN shall not be liable for any direct, indirect, or consequential damages arising from the use of this document..