



10.4" PCT LCD Module Specification


Model No. : SLM-MC104M-E

Date : _____

Customer	ACT Power GM

SLM-MC104M-E

Appearance

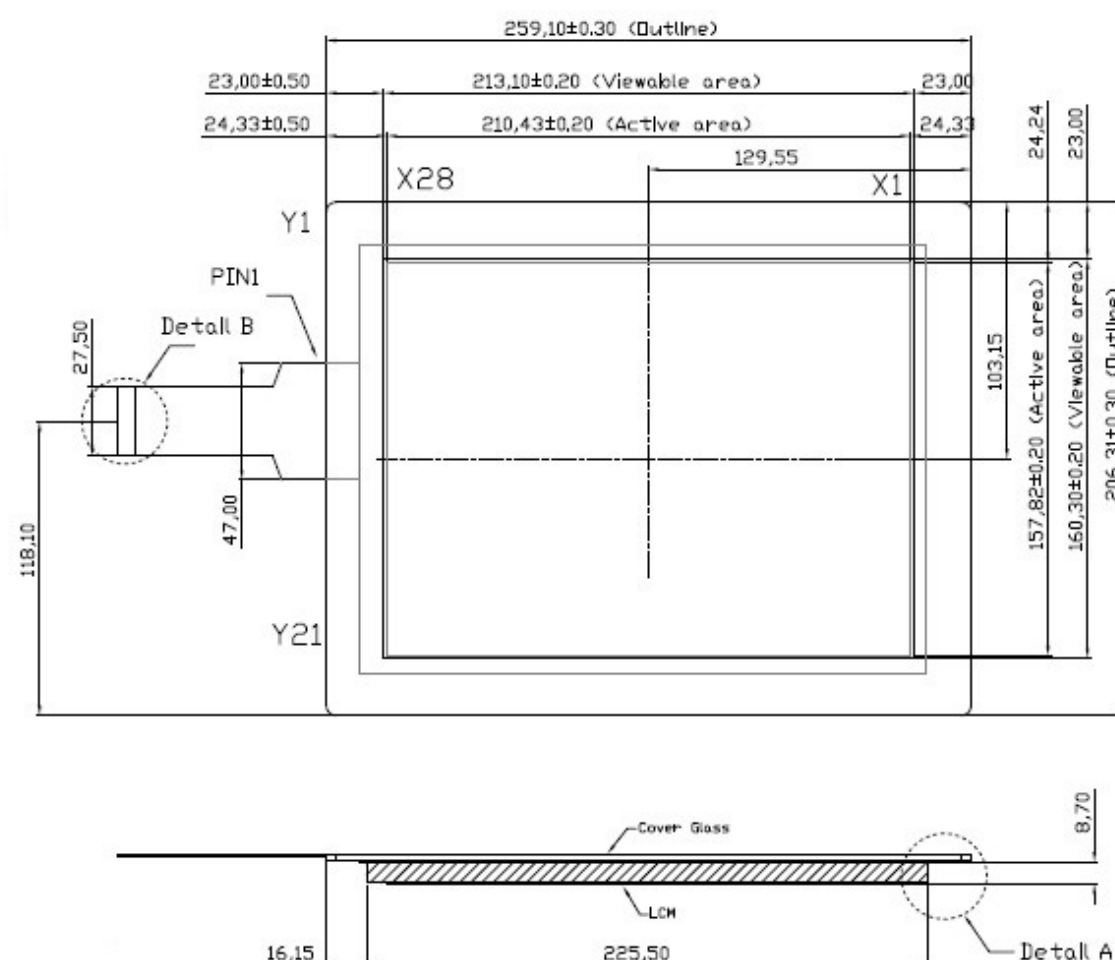

LVDS Pin Assignment

CN1 Connector Pin Assignment

Pin No.	Symbol	Description	Note
1	VCC	Power supply: +3.3V	-
2	VCC	Power supply: +3.3V	-
3	VCC	Power supply: +3.3V	-
4	GND	Ground	-
5	GND	Ground	-
6	GND	Ground	-
7	RPFI	Reverse Panel Function (Display Rotation)	(2)
8	NC	No Connection	(2)
9	NC	No Connection	(2)
10	NC	No Connection	(2)
11	SEL6/8	LVDS 6/8 bit select function control, Low or NC → 8 bit Input Mode High → 6bit Input Mode	(2)
12	GND	Ground	-
13	NC	No Connection	(2)
14	GND	Ground	-
15	RXD-	Negative transmission data of pixel 0	-
16	RXD+	Positive transmission data of pixel 0	-
17	GND	Ground	-
18	RX1-	Negative transmission data of pixel 1	-
19	RX1+	Positive transmission data of pixel 1	-
20	GND	Ground	-
21	RX2-	Negative transmission data of pixel 2	-
22	RX2+	Positive transmission data of pixel 2	-
23	GND	Ground	-
24	RXCLK-	Negative of clock	-
25	RXCLK+	Positive of clock	-
26	GND	Ground	-
27	RX3-	Negative transmission data of pixel 3	-
28	RX3+	Positive transmission data of pixel 3	-
29	GND	Ground	-
30	NC	No Connection	(2)

Note (1) Connector Part No.: STM, M8CK2407P30.D or compatible connector

Note (2) "Low" stands for 0V. "High" stands for 3.3V. "NC" stands for "No Connected".

Specifications

LCD Module

LCD Size	10.4 TFT LCD
Backlight	LED
Resolution	1024 x 768
View Angle	± 88° (H), ±88° (V)
Luminance	700 cd/m2 (After Bonding)
Contrast Ratio	1000:1
Aspect Ratio	4:3
Response Time	25 (Tr+Tf) ms
No. of Color	16.1 Million (8 bit/color)
Active area	210.4 x 157.8 mm
Pixel Pitch	0.0685(H) x 0.2055 (V)
LED Life Time	70,000 hr

Touch Screen

Touch Type	Capacitive Multi Touch
Viewable Area	213.10 x 160.30 mm
Active Area	215.50 x 162.70 mm
Touch Interface	USB
Touch Glass	AG/AR Strengthen Glass
Optical Bonding	EMI Mesh with Optical Bonding
Touch Drivers	Support Windows, Linux, Mac, etc.

Environmental

Operating Temperature	-30°C to +80°C
Storage Temperature	-30°C to +80°C
Humidity	90% RH, @ 60°C Non-Condensing
EMI/EMC	The LCD Kit is designed to meet ML-STD-461E/F for a whole display unit (Note)
Shock	The LCD Kit is designed to meet MIL-STD-810D for a whole display unit (Note)
Vibration	The LCD Kit is designed to meet MIL-STD-810E for a whole display unit (Note)
Altitude above sea level	0~9144 M (30000 feet) (Note)

Note 1: To work with mentioned certifications, this LCD Kit has offered the potential to be designed in to grain such certification however it is still depends on the final design of the full unit to pass the test and validation of such certification.

Note 2: Follow the industrial quality standard this LCD panel will include minimum 3 bright or dead pixels on viewable area and maxium total 5 bright or dead pixels on whole LCD panel.

Order information

Model Name

SLM-MC104M-E

Description

10.4" Military PCT LCD Module

Qty

1