



EXPERT SITE LIGHTING SOLUTIONS FOR MULTIPLE SITUATIONS



CT-YT-600

COMPATIBLE WITH MOBILE & FIXED INSTALLATIONS

Motorised 3-Axis LED Head

sitelightsolutions.com



EXPERT SITE LIGHTING SOLUTIONS FOR MULTIPLE SITUATIONS

COOL
TECHNOLOGY
Technologies for the Environment



Cool-Tech Ltd
Units 1&2 Four Ashes Farm,
Badwell Road, Walsham le Willows,
Bury St Edmunds, Suffolk IP31 3BT.
Tel: +44 (0)1379 658721 cool-tech.
co.uk

THREE MODELS MORE CHOICES



REMOTE CONTROL
LIGHTING
(REMOTE > 60M)



360°
HORIZONTAL ROTATION
270°
VERTICAL ROTATION



IP65
WATERPROOF
RATING



▲
1800W
180 LM/W
32KG



▲
1200W
180 LM/W
24.2KG



▲
600W
180 LM/W
16KG



MOBILE LIGHT
TOWER



CONTAINER



ENGINEERING
VEHICLE



PORT



SHIP



MINING



WAREHOUSE




CONSTRUCTION
SITE



RESCUE



EVENTS

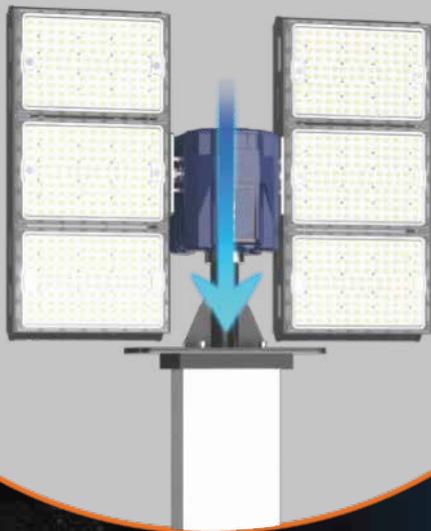

PLUG & PLAY


MOBILE RAPID DEPLOYMENT

INTEGRATE WITH MOBILE LIGHT TOWERS,
EMERGENCY VEHICLES OR TEMPORARY STANDS

FITS MOST LIGHT TOWERS PERFECTLY
WITH SIMPLE INSTALLATION



MULTI-HEAD
SYNERGY SYSTEM

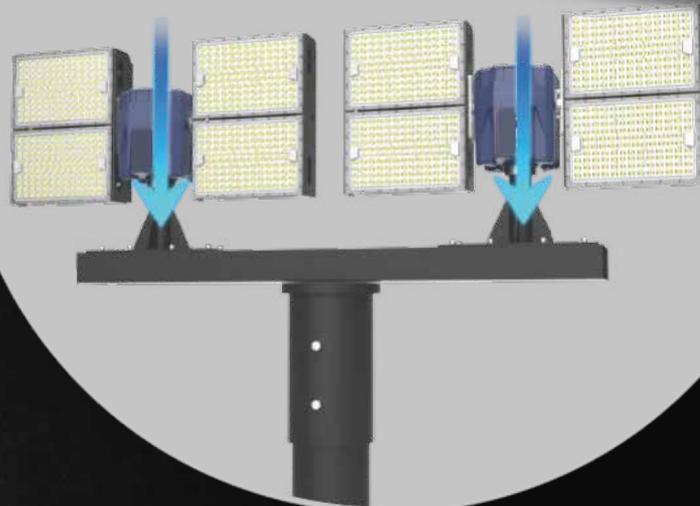

PROFESSIONAL FIXED INSTALLATION

COMPATIBLE WITH STREETLIGHT POLES, PORT WATCHTOWERS,
BUILDING FACADES, AND CEILINGS



INTELLIGENT LIGHTING CONTROL


DIFFERENT LIGHTING ANGLES CAN BE FLEXIBLY SELECTED ACCORDING TO ACTUAL NEEDS



Remote range:
60 meters (max)

360-DEGREE HORIZONTAL ROTATION


Rotate freely in 360 degrees horizontal direction, instantly rotate/stop with remote commands.

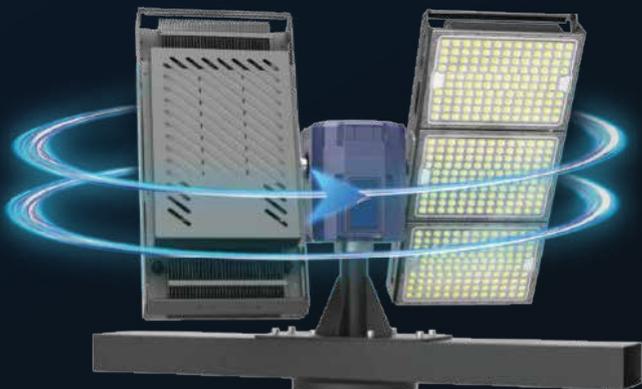

360°

270-DEGREE VERTICAL ROTATION


Rotates up to 270 degrees up and down, precisely pointing to any target position.

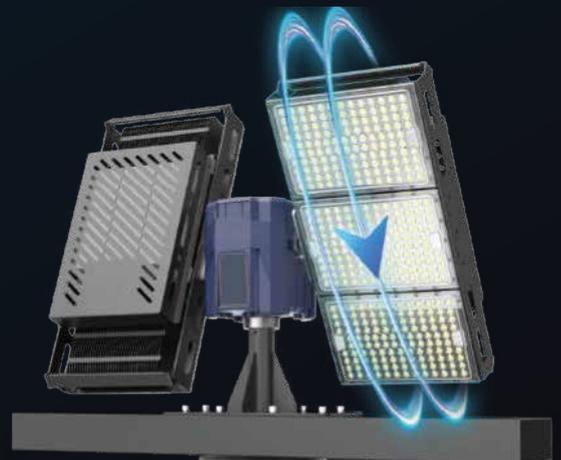

270°


BEACON MODE

360° PATROL MODE

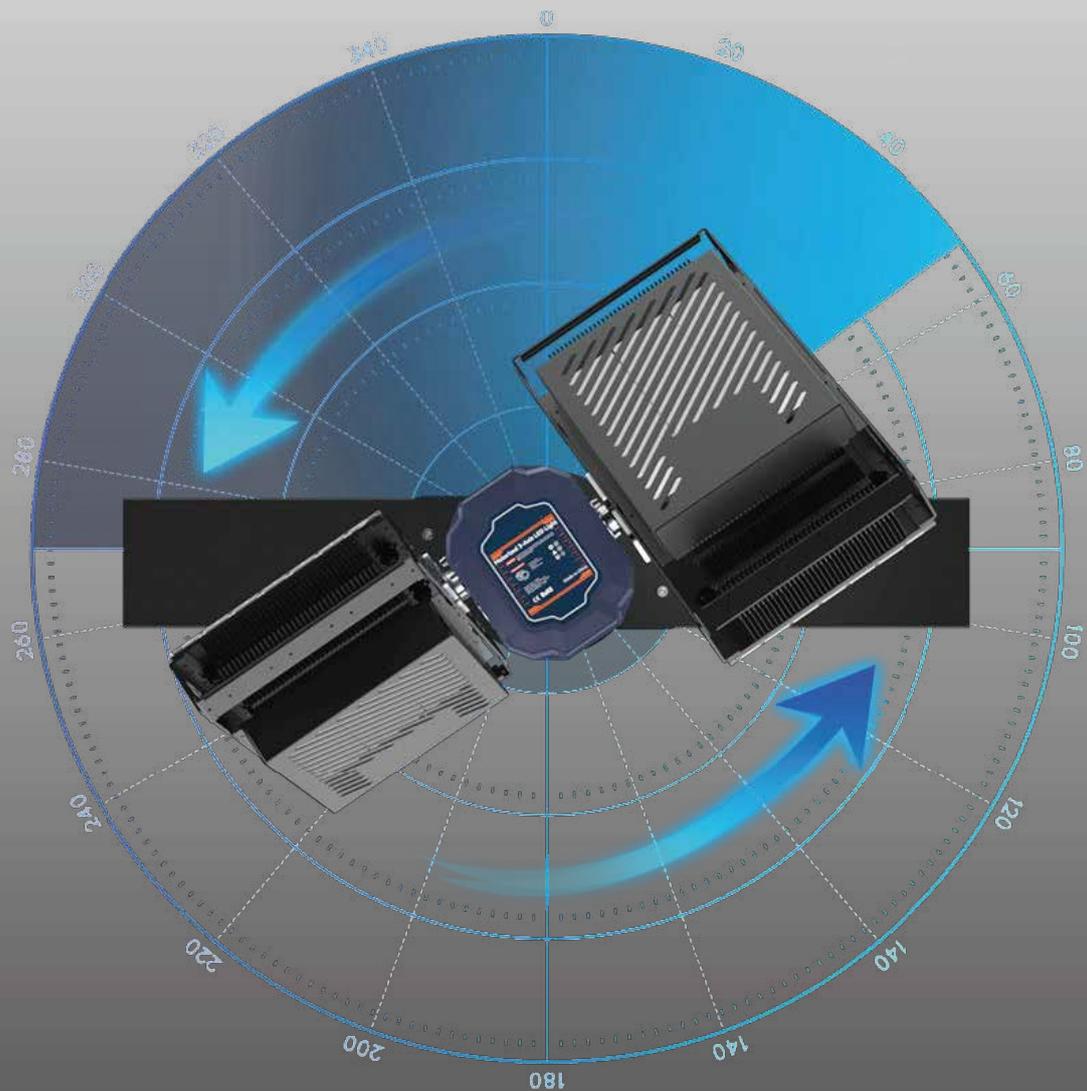

ANY TIME ANY WHERE CONTROL AS YOU WISH!

MAXIMUM REMOTE RANGE: 60 METERS (OPEN AREA)

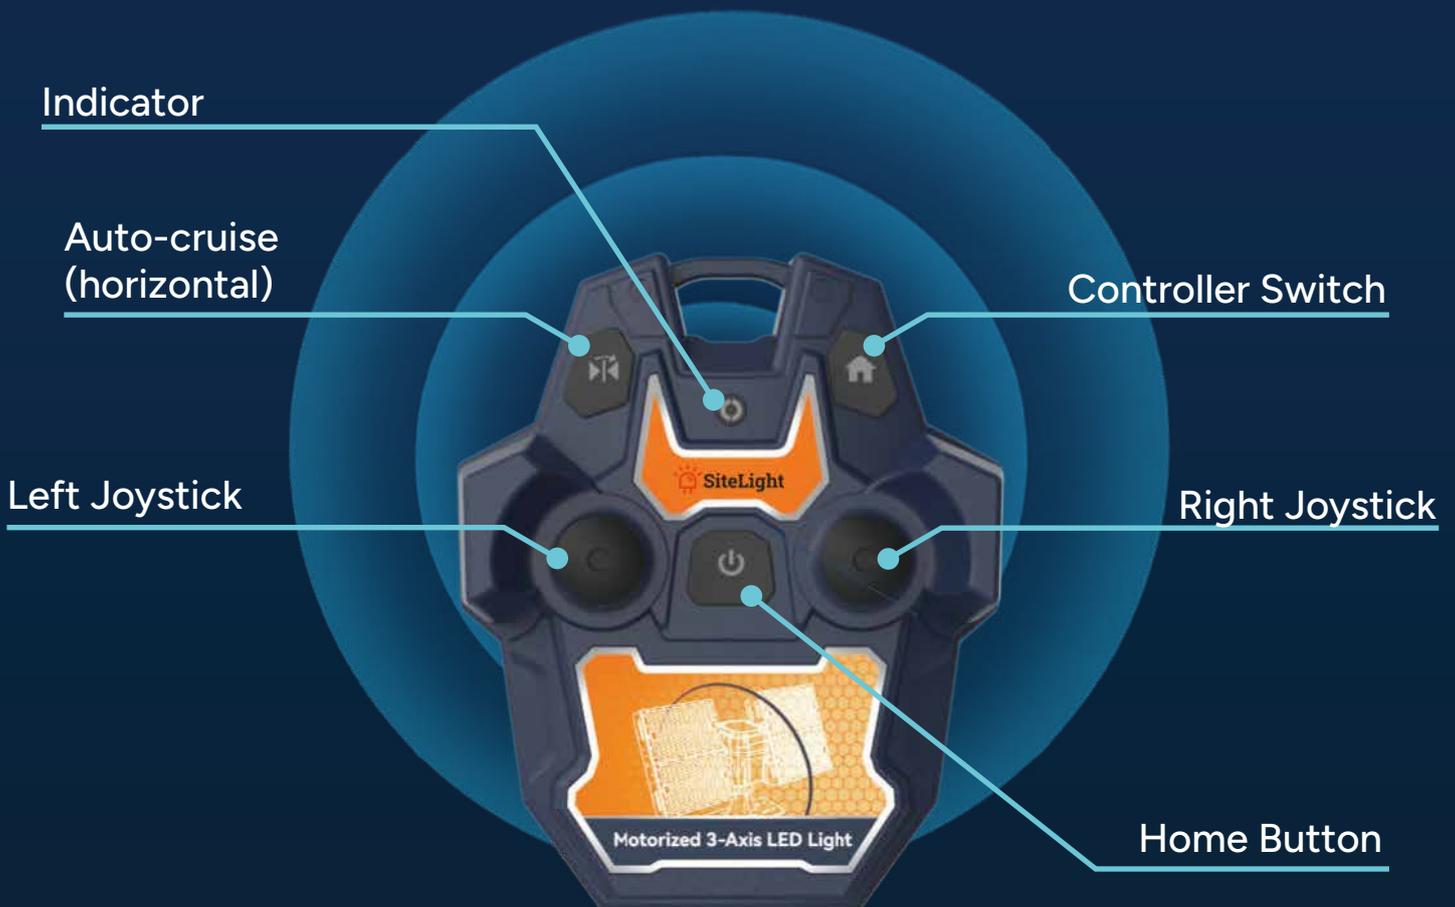

COMPATIBLE WITH MAJOR DIESEL-POWERED LIGHT TOWER BRANDS

REPLACE THE ORIGINAL LAMP HEAD
WITHOUT CHANGING THE LIGHT TOWER
BASE OR BRACKET



**ECO-FRIENDLY
ENERGY SAVINGS**




**LESS
MAINTENANCE COST**



Before Use



After Use

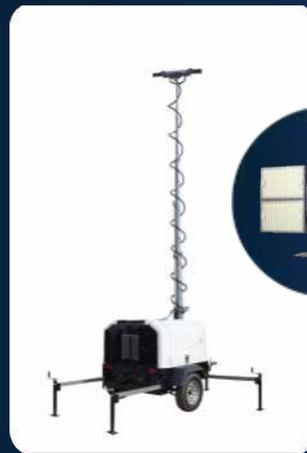

Before Use



After Use



Before Use



After Use



Before Use




After Use

Specifications


Model	YT-600(600W)	YT-600(1200W)	YT-600(1800W)
Weight (With Remote Control)	16KG	24.2KG	32KG
Wattage	600W	1200W	1800W
Luminous Efficacy	180LM/W		
CRI	Ra >70		
CCT	5000K (2700K-6500K)		
IP Grade	IP65		
Beam angle	30° / 60° / 90°		
Working Temp	-40℃ ~ 60℃		
Working Humidity	1~98%		

Size (mm)


YT-600(600W)

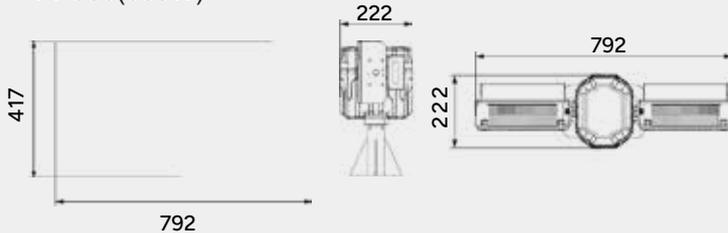

YT-600(1200W)

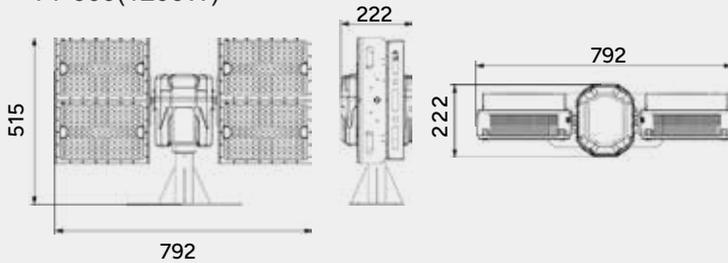

YT-600(1800W)

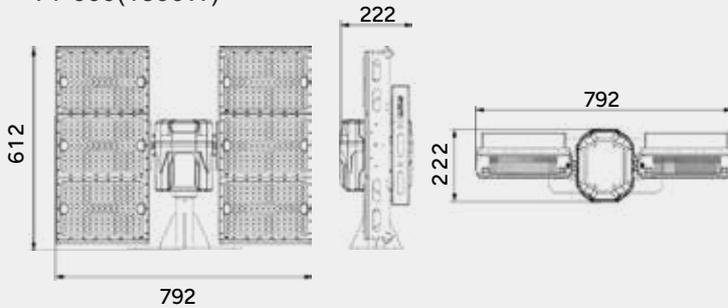

Package

Model	YT-600 (600W)	YT-600 (1200W)	YT-600 (1800W)
Size of Carton	900x500x330mm	900x600x330mm	900x700x330mm
Gross Weight of Carton (With Remote Control)	22KG	34KG	42KG
PCS/Carton	1	1	1

