



1512 nm DFB Laser

(P/N.: TDLAS-DFB-1512-TO39-2-01)

Features

- Multi-Quantum Well (MQW) Distributed Feedback (DFB) lasers with built in thermistor and TEC.

Applications

- TDLAS for Ammonia detection

Absolute Maximum Ratings


Parameter	Symbol	Min	Max	Unit	Condition
Operating Case Temperature	T_c	-5	75	°C	--
Storage Temperature	T_{stg}	-40	85	°C	--
Reverse Voltage	V_R	--	2	V	
Forward current	I_F		100	mA	
Thermoelectric cooler voltage	V_{TEC}		1.2	V	
Thermoelectric cooler current	I_{TEC}		0.7	A	
Lead solder Temperature	--		260	°C	--
Lead Soldering Time	--		10	s	--

Opto-Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Optical Output Power	P_o	5	8	-	mW	CW, $T=25^{\circ}\text{C}$, $I_F = 40\text{mA}$
Threshold Current	I_{th}	3	-	15	mA	CW, $T=25^{\circ}\text{C}$
Forward Voltage	V_F	-	1.5	2.0	V	$T=25^{\circ}\text{C}$, $I_F = 30\text{mA}$
Center Wavelength	λ_c	1511	1512	1513	nm	CW, $T=25^{\circ}\text{C}$
Side-mode Suppression Ratio	SMSR	35	40	-	dB	$I_F=30\text{mA}$
Monitor Dark Current	I_D	-	-	100	nA	$V_R=5\text{ V}$
Monitor Photodiode Current	I_{PD}	40	-	1000	μA	
Thermistor Resistance	R_{TRM}	9.5	10.0	10.5	$\text{K}\Omega$	$T=25^{\circ}\text{C}$
Thermistor B-Value	B	3800	3950	4000	K	$T=25^{\circ}\text{C}$
TEC Power	P_{TEC}	-	-	0.7	W	$T=25^{\circ}\text{C}$
TEC Capacity	ΔT_{TEC}	-	-	70	°C	$T=25^{\circ}\text{C}$



Dimensional outline (units = mm)

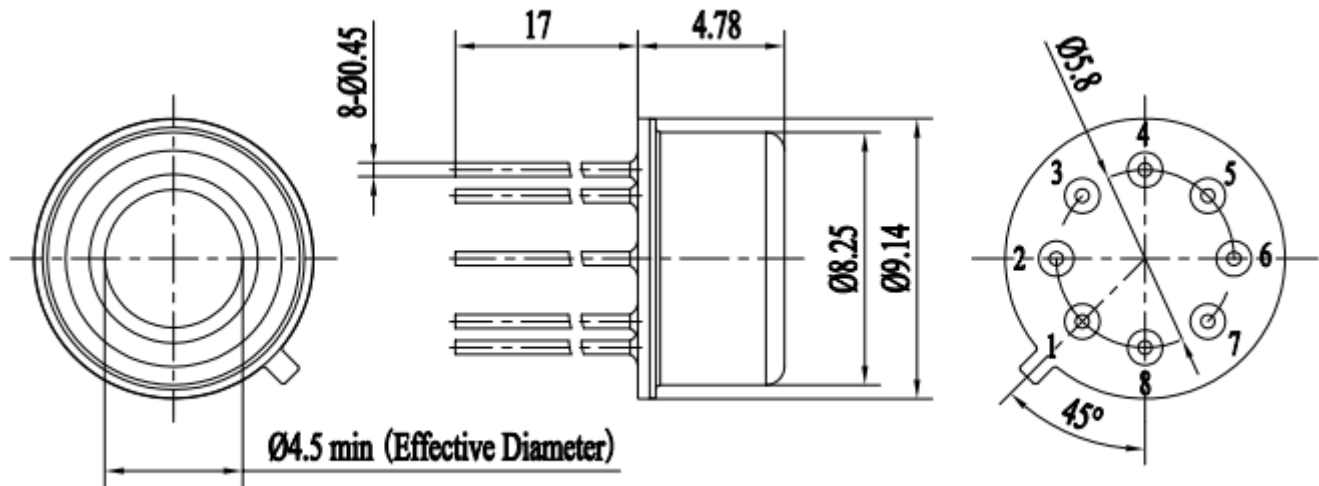

No.	Description
1	Laser anode (+)
2	Laser cathode (-)
3	TEC cathode
4	TEC anode
5	Thermistor
6	Thermistor
7	MPD
8	MPD