

BP50 Back Pressure Valve

The BP50 series valve provides a self-contained, pilotoperated regulator to be used in various vent line applications including separators, heat treaters, compressor stations, gas gathering systems, and any other application where back pressure needs to be maintained.

The BP50 is offered in 2", 3", 4", and 6" sizes. The 2" and 3" valve are available in both flanged and female NPT thread end connections. The flanged BP50 valves are pressure rated up to 250 psi, and the threaded end valves are rated up to 300 psi.

Maintenance is made simple via removing the bonnet to reveal the seat, allowing the valve body to remain in place during maintenance.

The pilot exhaust is vented into the downstream side of the valve making the BP50 a zero bleed, emissions free device.



Specifications

Sizes: 2", 3", 4" and 6"

Connections: Female NPT (2" & 3" only), Flanged

Body Type: Globe
Trim: Soft Seat
Shutoff: Class VI

Pressure Rating:

300 psi - 2", 3" NPT

250 psi - 2", 3", 4", 6" Flanged

Minimum Setpoint: 10 psi Spring Range: 10-300 psi

Temperature Range: -20° F to 250° F

Body, Bonnet, and Hub Material: Ductile Iron




CV Values						
2"	3"	4"	6"			
53	117	209	491			

Dimensions & Weights

Valve Size	Valve Weights				
	End Connection	lbs	kg		
2"	NPT	39	18		
	ANSI 150	43	20		
3"	NPT	68	31		
	ANSI 150	84	38		
4"	ANSI 150	127	58		
6"	ANSI 150	348	158		


Valve Size	Body Dimension					
	End Connection	Α	В	С		
2"	NPT	8.5	2.38	12.66		
	ANSI 150	9	2.88	12.66		
3"	NPT	12.06	3.75	13.60		
	ANSI 150	12.19	3.75	13.60		
4"	ANSI 150	15.06	4.44	14.31		
6"	ANSI 150	22	5.63	20.04		

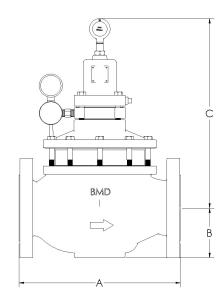

How to Order

Example Model No. BP50-2N1

BP50 Series Back Pressure Valve, 2" Globe Body, NPT End Connection, Standard Service.

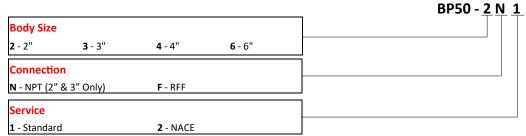



Phone: 409-225-5863

Fax: 409-242-1005

850 Fannin

Beaumont, Texas 77701