

GV20 GAUGE VALVE



The GV20 Gauge Valves are designed to be used with BMD's LG20 Level Gauges but are also compatible with all armored flat-glass level gauges. Union tank connections make for easy installation and removal.

Features:

- **Safety Shutoff:** SST ball check upstream of the seat shuts off flow in the event of glass breakage.
- **Ergonomic Handle:** Sturdy 0.75" diameter tee handle for ease of use and comfortable operation.
- **Offset Design:** Body and drain connections are offset from the tank connection for easy glass cleaning.
- **NACE Compatible:** Wetted parts conform to NACE MR0175 specifications for sour gas service.



SPECIFICATIONS

Connections:


- Level Gauge Connection: 1/2"
- FNPT Tank Connection: 1/2" and 3/4" Union

Pressure Range:

- 4000 psi at 100°F
- Limited by pressure rating of Level Gauge glass

DIMENSIONS

Measurements in inches

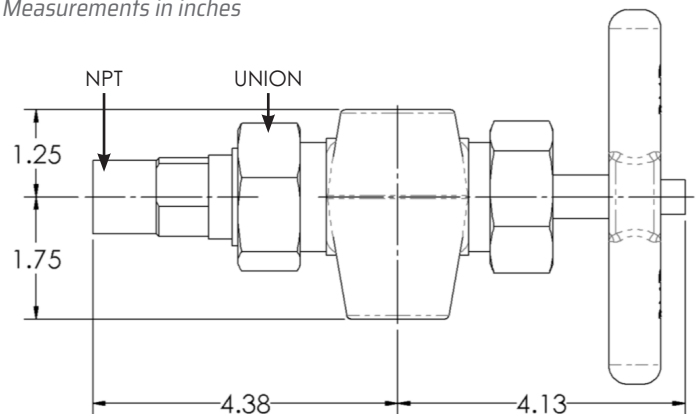

HOW TO ORDER

EXAMPLE MODEL NO. **GV20-F1**

GV20 Gauge Valve with 1/2" Tank Union and 1/2" FNPT Glass Connections

GV20 - F1
SERIES

TANK CONNECTION

F1 - 1/2" NPT x Union

F2 - 3/4" NPT x Union

