




Fully Supported
Tapered Transition.

Exterior Baffle
Design Prevents
Debris Build-Up.


Low Profile Blends
into Roof.

Your Multi-Purpose Exhaust Vent Solution.


EXHAUST INSTALLATION APPLICATIONS:

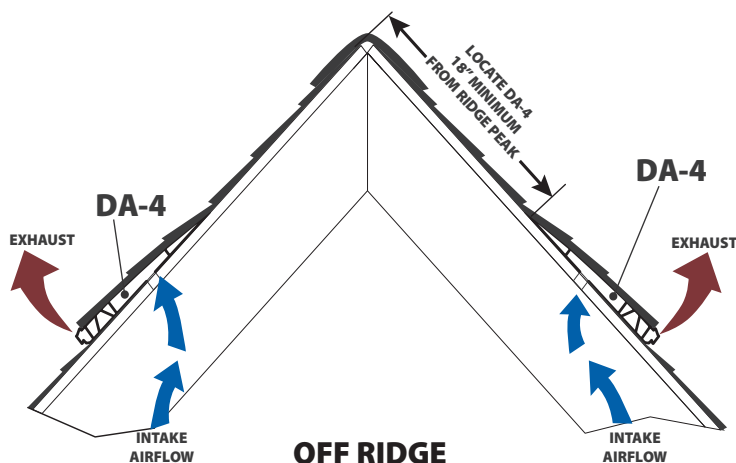

OFF RIDGE

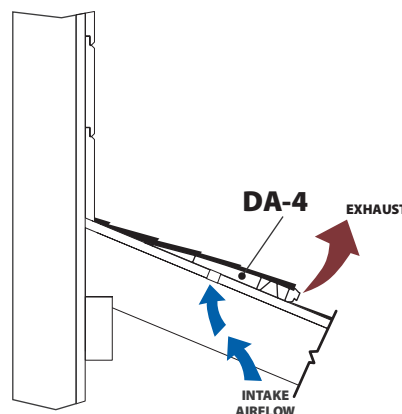

ROOF MEETS WALL

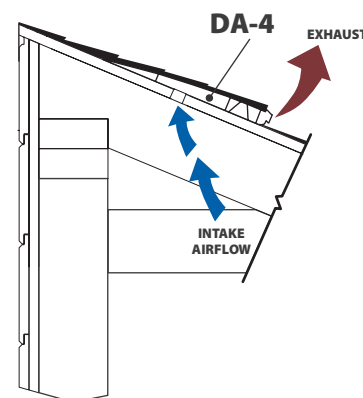

SINGLE SLOPE

DA-4 FEATURES:

- 2½" ring-shank nails included.
- Made from the same durable, long-lasting and field-tested material as Omni Series vents.
- Unique design provides enhanced weather protection.
- Integrated end plug every 2 inches.
- 9 square inches of Net Free Area per linear foot.
- Molded nail lines.
- Fits roof pitches 3/12 to 16/12.
- Slot width guidelines.
- Patented design.
- The DA-4 can be used as an intake vent (see reverse).
- **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Molded-in Cut
Lines for Tapered
Transitions.

Engineered
Material
Guarantees
Longevity.

10 Supported
Nail Holes.

Shingle Stop
Alignment Tabs.



CSA
Approved



Texas Department
of Insurance
"Windstorm" Approved




Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.



Roof Deck Installed Intake Ventilation Made for Roofers.

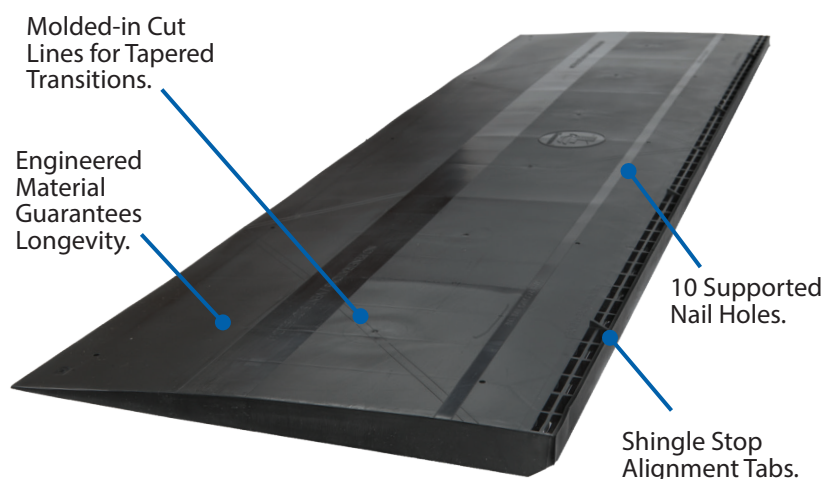

DA-4 FEATURES:

- 2½" ring-shank nails included.
- Made from the same durable, long-lasting and field-tested material as Omni Series vents.
- Unique design provides enhanced weather protection.
- Integrated end plug every 2 inches.
- 9 square inches of Net Free Area per linear foot.
- Molded nail lines.
- Fits roof pitches 3/12 to 16/12.
- Intake slot width guidelines.
- Patented design.
- The DA-4 can be used as an exhaust vent (see reverse).
- **Lifetime Limited Warranty.**



Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.