

Overview

- 20 kW open Genset
- Powder coated steel slide rack
- Cooling airflow output through front radiator



1721 Leesburg Commons Ct,
Leesburg, FL 34748

General Specifications


Genset Power, kW	20
Weight, lbs (kgs)	1075 (487)
Length, in (m)	56.51 (1.44)
Width, in (m)	30.00 (0.76)
Height, in (m)	28.58 (0.73)
Color / Finish	Anodized Silver Powder Coat

Engine Specifications

Engine	Isuzu 4LE2T
Displacement, cu. in. (L)	134.3 (2.2)
Cooling	Liquid / Aluminum Radiator
Cooling Fans	Engine Driven 17" Fan
Engine RPM	1800
Power, HP (kW)	40 (30)
Governor	Electronic
Fuel Type	Ultra Low Sulfur Diesel
Emmision Standard	EPA Tier IV Final / EU Stage V
Engine Cylinders	4
Exhaust Aftertreatment	Diesel Oxidation Catalyst (DOC)
Aspiration	Turbo Charged
Exhaust Connection	Telescopic Exhaust
Starter Voltage, DC	12
Engine Alternator Voltage, DC	12
Engine Alternator Amps	50
Communication Protocol	J1939 CANBus
Oil Type	15W-40
Oil Capacity, qt. (L)	8.4 (8)
Coolant Type	1:1 Water / Glycol Mix
Coolant Capacity, qt. (L)	11.25 (10.6)
Fuel Consumption @ 100%, gph (Lph)	1.6 (6.1)
Fuel Consumption @ 75%, gph (Lph)	1.3 (4.9)
Fuel Consumption @ 50%, gph (Lph)	0.9 (3.4)

Electrical Specifications




Generator End	184E Brushless
Power Output, kW	20
Voltage Regulator	SX 460
Electrical Connection	Flying Lead, Flexible Conduit
Neutral Configuration	Bonded Neutral
Power Rating [kW]	20
Voltage [V]	120 [L-N] / 240 [L-L]
Amperage [A]	80 @ 240 Vac
Frequency [Hz]	60

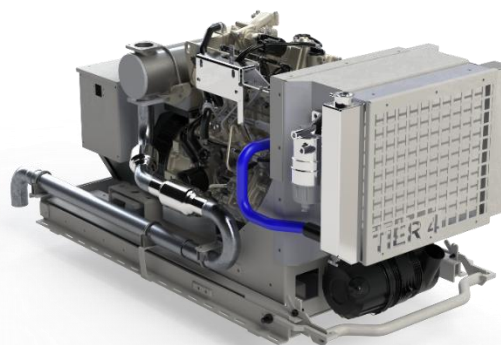

Special Features

- Front Serviceability
- Cable Track for Fuel/Battery/Output
- Telescopic Exhaust
- Prevost X3 Door Shrouding Available
- Easy Install with Bulkhead Connections
- Ergonomic Slide Out Handle
- Optimized for Dual Generator Installation in Prevost X3

Overview

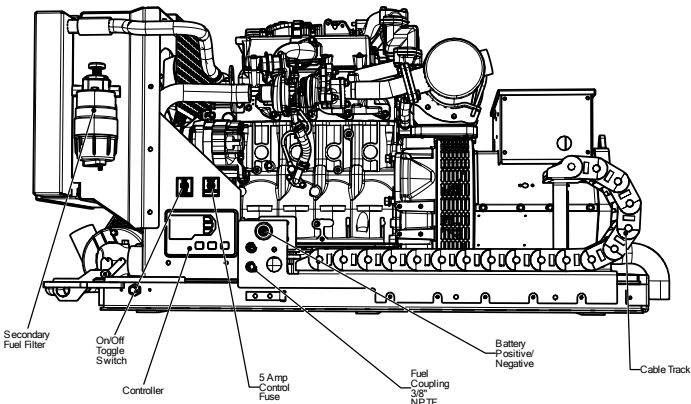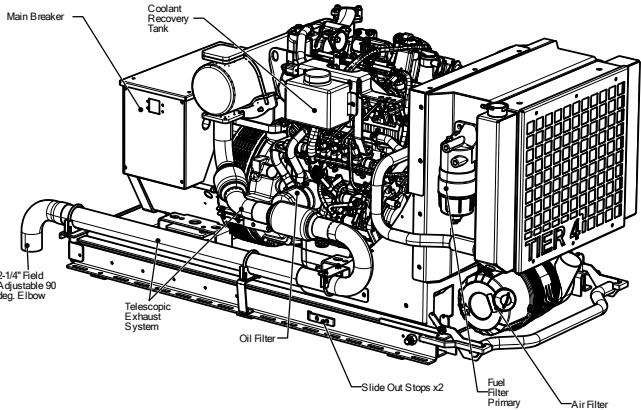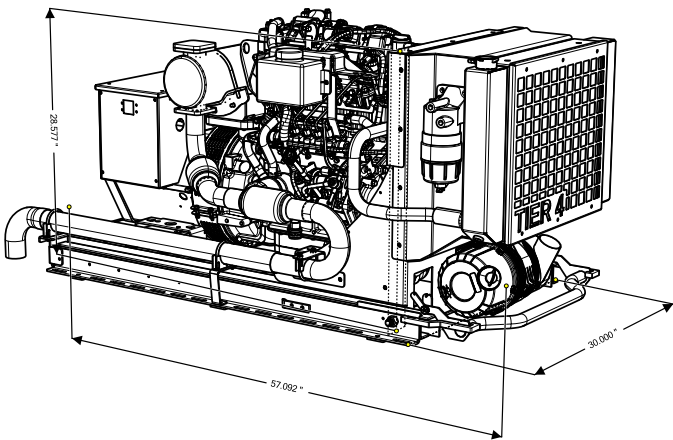

Extended Slide Rack

