

Fit Express Speed Oven



RECOMMENDATION

- The **Fit Express** high-speed oven is designed for efficiently finalizing refrigerated, fresh, or frozen foods, such as breakfast sandwiches, chicken wings, muffins, lasagnas, mac & cheese, sub sandwiches, and other partially prepared dishes. It delivers excellent flavor, appearance, and crispiness. The combination of impinged air and microwaves allows for heating, browning, or toasting foods up to 20 times faster than traditional methods.

TECHNICAL FEATURES AND FUNCTIONALITIES


- It has 2 (two) magnetrons, each with a power of 1,100 watts.
- Stores 1024 recipes with up to 8 steps each, divided into 16 groups.
- USB port for system updates and importing/exporting groups, recipes, and settings.
- Wi-Fi and wired (RJ45) capabilities, enabling remote management for system updates and importing/exporting groups, recipes, and settings via the IOK online platform.
- Adjustable temperature from 86°F (30°C) to 536°F (280°C).
- Independent control of impinged air (high-speed air blast) and microwaves.
- User-friendly touchscreen panel.
- Constructed from stainless steel.
- Certified Ventless – no need for vent hoods.
- Easy-to-remove catalytic converter for hassle-free cleaning.
- Additional functionalities: Test Mode and Favorites.
- Daily cleaning guide with explanatory videos displayed on the screen, demonstrating the step-by-step process.
- Warranty – 1 year.

INCLUDED ACCESSORIES

- 01 - Aluminum Paddle;
- 01 - Solid PTFE Basket.

OPTIONAL ACCESSORIES

- 01 - Wave Tray.

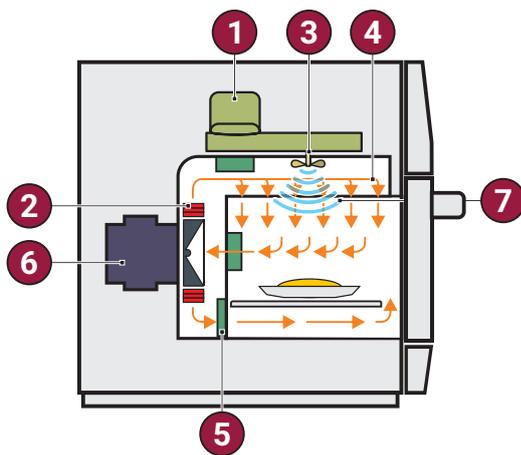

1. Magnetron
2. Resistance (Infrared)
3. Stirrer
4. Impinged air
5. Catalytic converter
6. Blower motor
7. Microwaves




Black


Stainless
steel



PRODUCT DIMENSIONS

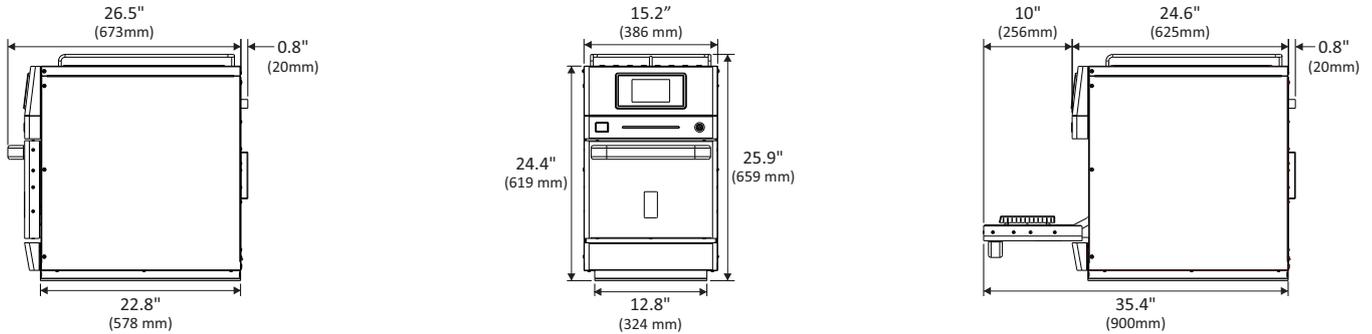

INSTALLATION

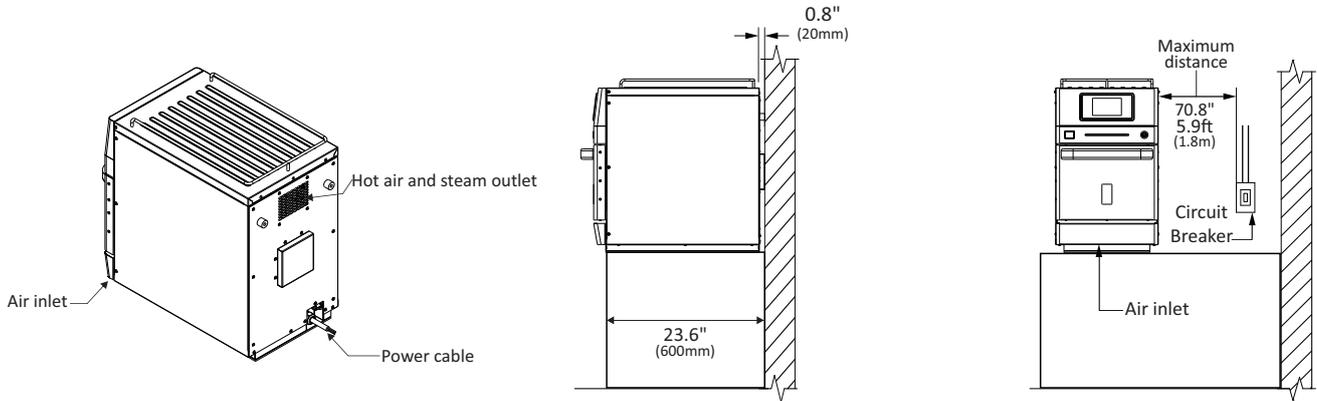

ELECTRICAL SPECIFICATIONS

Ensure that the electrical configuration of the building is in accordance with the technical specifications located on the serial plate located on the back panel of the unit.

The outlet should be located no more than 70.8" / 5.9ft / 1.8m away from the unit.

This plug must be connected to a properly installed and grounded outlet. In case of a short circuit, the unit's ground connection reduces the risk of electrical shock.

The customer is responsible for the electrical conditions at the installation site.

| Region | Voltage (V) | Phases | Freq. (Hz) | Power (kW) | *Circuit Breaker (A) | Cable | Socket |
|--------------|-------------|--------|------------|------------|----------------------|-----------------------|----------------------------|
| Europe | 230 | Single | 50 | 6.8 | 32 | 3x4mm ² | 32A (2P+E) |
| | 380 | Multi | 50 | 6.5 | 16 | 5x2,5 mm ² | 16A (3P+N+E) |
| | 400 | Multi | 50 | 6.8 | 16 | 5x2,5 mm ² | 16A (3P+N+E) |
| Saudi Arabia | 220 | Single | 60 | 6.5 | 32 | 3x4mm ² | 32A (2P+E) NOT PROVIDED |

*Prática recommends installing a type D circuit breaker. The electrical installation must comply with local regulations.

GENERAL INSTRUCTIONS

The oven must be installed on a base or counter that supports the weight of the unit (approximately 157.1 lbs. / 71.3 kg). For proper ventilation, a minimum space of 0.8" (20mm) is required between the back of the oven and the wall. The bumper, located at the back of the oven, has been designed to provide this necessary space at the back of the oven and cannot be removed.

Do not block the air inlets and outlets located on the front and back of the oven.

It is not recommended for the unit to be positioned near stoves, deep fryers, hot plates and other equipment that releases fat, fumes and heat.

The oven must be installed at a leveled and ventilated location.

Improper installation may void the equipment warranty.

DIMENSIONS

| Fit Express | Product dimensions | | | | Boxed product dimensions | | | |
|--------------------|--------------------|---------------|---------------|-------------------|--------------------------|---------------|---------------|-----------------|
| | Height | Width | Depth | Weight | Height | Width | Depth | Weight |
| | 25.9" (659mm) | 15.1" (386mm) | 27.3" (693mm) | 157.1lbs / 71.3kg | 33.4" (850mm) | 21.6" (510mm) | 35.4" (900mm) | 191.8lbs / 87kg |
| Chamber dimensions | Capacity | | Height | Width | Depth | | | |
| | 0.45 cu.ft / 13L | | 5.2" (133mm) | 12.4" (315mm) | 12.1" (308mm) | | | |
| Wall clearance | Left side | | Back | | Right side | | | |
| | 0" (0mm) | | 0" (0mm) | | 0" (0mm) | | | |