


Fit Lite Speed Oven

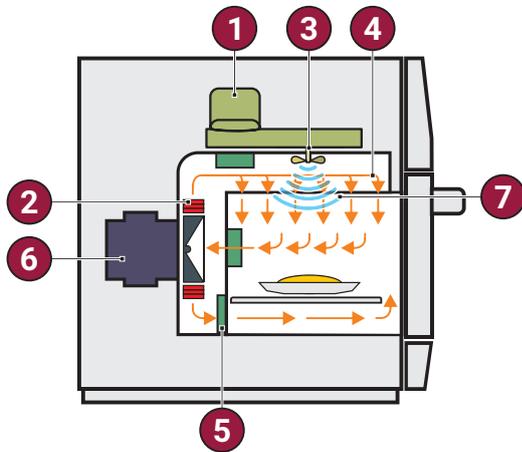

- 1 - Magnetron
- 2 - Resistance (infrared)
- 3 - Stirrer
- 4 - Impinged air
- 5 - Catalytic converter
- 6 - Blower motor
- 7 - Microwaves

RECOMMENDATION

- The *Fit Lite oven is intended for the rapid finishing of refrigerated foods, pre-fried savory items, pre-baked products, lasagnas, pasta, sandwiches, casseroles, and other semi-prepared foods, delivering excellent results in flavor, appearance, and crispness. The impinged air convection technology combined with microwave energy allows food to be heated, gratinated, or toasted.

- * *The Fit Lite is not recommended for operations with frozen products.*

TECHNICAL FEATURES AND FUNCTIONALITIES

- Equipped with 1 (one) 1,100-watt magnetron;
- Stores up to 1024 recipes with up to 8 steps each, divided into 16 groups;
- USB connection for updates and for importing/exporting groups, recipes, and settings;
- Adjustable temperature from 30°C to 280°C;
- Easy-to-operate touch screen panel;
- Independent control of air speed, temperature, and microwave;
- Removable Catalytic filter easy to remove for CLEANING;
- Cavity constructed of stainless steel;
- Daily cleaning guide demonstrating the step-by-step process;
- 1-year warranty on parts and labor (excluding natural wear items).

INCLUDED ACCESSORIES


- 01 – Solid PTFE Basket;
- 01 – Aluminum paddle.

OPTIONAL ACCESSORIES


- 01 - Wave Tray.



PRODUCT DIMENSIONS

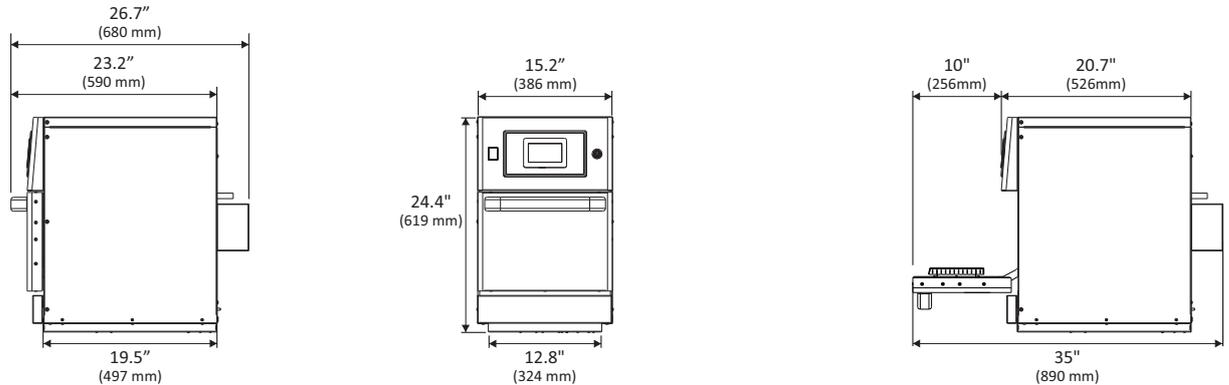

INSTALLATION

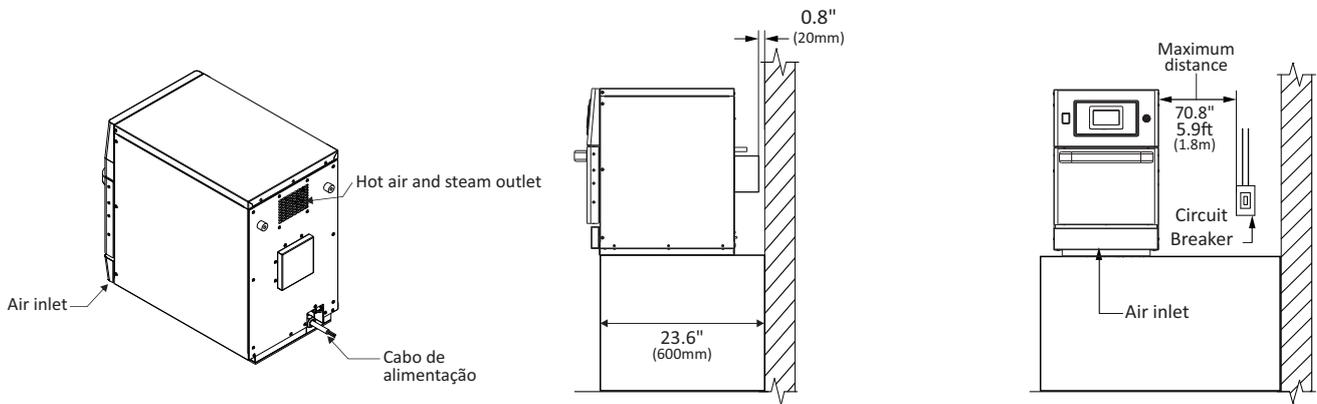

ELECTRICAL SPECIFICATIONS

Ensure that the electrical configuration of the building is in accordance with the technical specifications located on the serial plate located on the back panel of the unit.

The outlet should be located no more than 70.8" / 5.9ft away from the unit.

This plug must be connected to a properly installed and grounded outlet.

In case of a short circuit, the unit's ground connection reduces the risk of electrical shock.

The customer is responsible for the electrical conditions at the installation site.

FIT LITE

(The Fit Lite version is only available in the version with stainless steel finish and color.)

Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
United Kingdom	230	Single	50	3	13	3x1,5 mm ²	13A (2P+E)	NOT PROVIDED
Europe	230	Single	50	3.4	16	3x2.5 mm ²	16A (2P+E)	NOT PROVIDED
	230	Single	50	3.4	16	3x2.5 mm ²	16A (2P+E)	

*Prática recommends installing a type D circuit breaker. The electrical installation must comply with local regulations.

GENERAL INSTRUCTIONS

The oven must be installed on a base or counter that supports the weight of the unit (approximately 123.4 lbs. / 56 kg). For proper ventilation, a minimum space of 0.8" is required between the back of the oven and the wall. The bumper, located at the back of the oven, has been designed to provide this necessary space at the back of the oven and cannot be removed.

Do not block the air inlets and outlets located on the front and back of the oven.

It is not recommended for the unit to be positioned near stoves, deep fryers, hot plates and other equipment that releases fat, fumes and heat.

The oven must be installed at a leveled and ventilated location.

Improper installation may void the equipment warranty.

DIMENSIONS

Fit Lite	Product dimensions				Boxed product dimensions			
	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	24.4" (619mm)	15.1" (386mm)	26.7" (680mm)	123.4lbs 56kg	33.4" (850mm)	21.6" (510mm)	35.4" (900mm)	158.7lbs 72kg
Chamber dimensions	Capacity		Height		Width		Depth	
	0.45 cu.ft 13L		5.2" (133mm)		12.4" (315mm)		12.1" (308mm)	
Clearance	Left side		Back		Right side			
	0" (0mm)		0" (0mm)		0" (0mm)			