



SPECIFICATION SHEET

DS-A90

previously GI-T2

LINE



Yellow glove made of a blend of Kevlar® and Nomex® with an aluminized reinforcement between the thumb and index finger for enhanced durability and heat protection.



BENEFITS

- Designed for handling hot pieces.
- Suitable for smelting processes.



OPERATIONS


- Ideal for managing pots and smelting tools.



INDUSTRY



Manufacturing

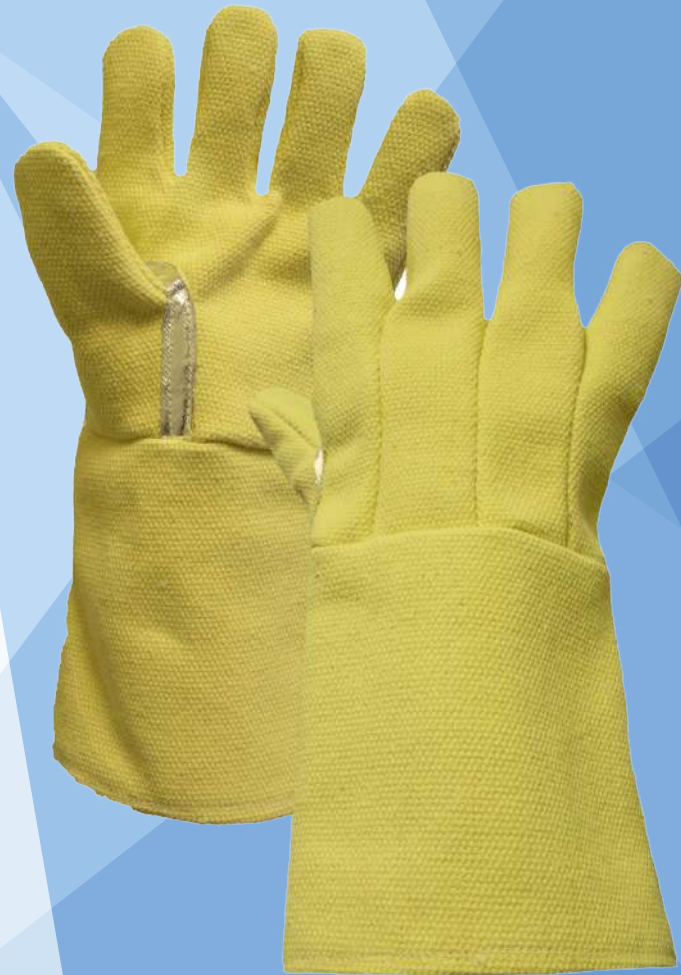

LOW
DEXTERITY



HIGH HEAT



DRY



10 pairs/box

Sizes

One-Size



EN 407



X4XXXX



    **GUANTES INTERNACIONALES**
“Safety and comfort for the industrial athlete”



LIMITATIONS OF USE

1. Specific protection:

- Designed for mechanical risks: cuts, abrasion, back-of-hand impact, and light vibration.
- Does not provide protection against electrical risks, fire, high temperatures, or chemicals.
-
- Not to be used for welding.

2. Glove Integrity:

- **Do not use** if there is excessive wear, tears, or significant loss of coating, or if visible damage is present on the palm or fingers