


# AT260

## Compact Track Loader



**ATLAS**  
— IRON CE —

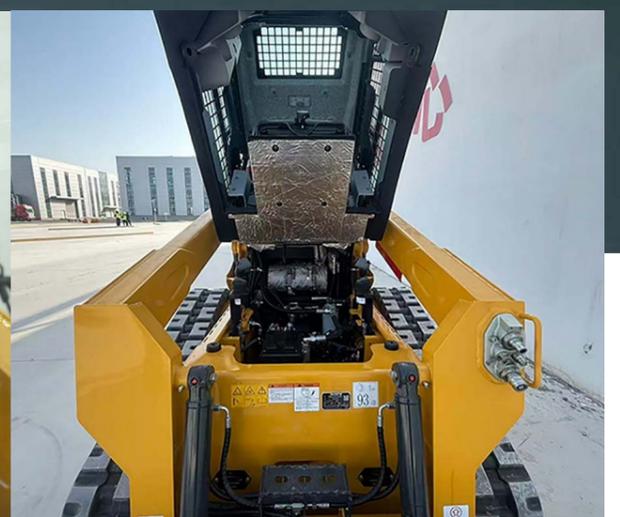



# AT260

## Compact Track Loader



**ATLAS**  
IRON CE

Model		AT260		
<b>Engine</b>	Model	Kubota V3307		
	Output	rpm	2600	
	Displacement	L	3.33	
	Cylinders	4		
	Bore x Stroke	mm	94 x 120	
<b>Loader Performance</b>	Rated operating capacity-35% tipping load		lb	2614
	Tipping load		lb	7469
	Breakout force	Bucket	lbf	5.395
		Lift arm	lbf	4.945
<b>Undercarriage</b>	Track Width	Standard	in	12.5
		Wide	in	15
	Ground pressure	Standard	psi	6.93
		Wide	psi	5.54
	Track rollers	4		
	Travel speed	Low	mph	5.59
		High	mph	8.7
Traction force	lbf 9442			
Min. ground clearance	in 10.8			
<b>Hydraulic system</b>	Aux. hydraulic flow	Std./High Flow	gal/min	19.8/30.4
	Aux. hydraulic pressure	psi 3035		
<b>Service refill capacities</b>	Cooling system	galL 2.9		
	Hydraulic tank	gal 5.3		
	Fuel tank	gal 24.6		
<b>Operating weight</b>		lbs	10318	

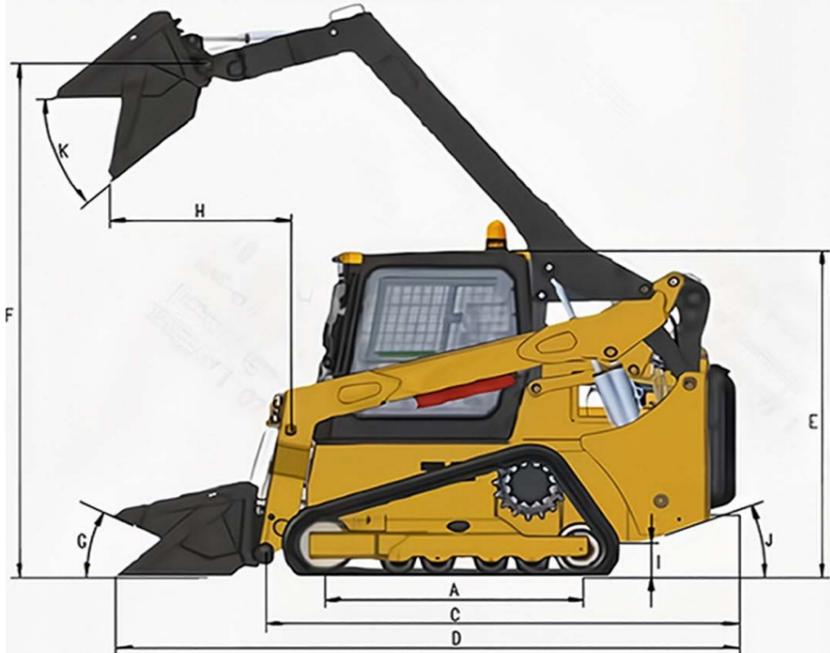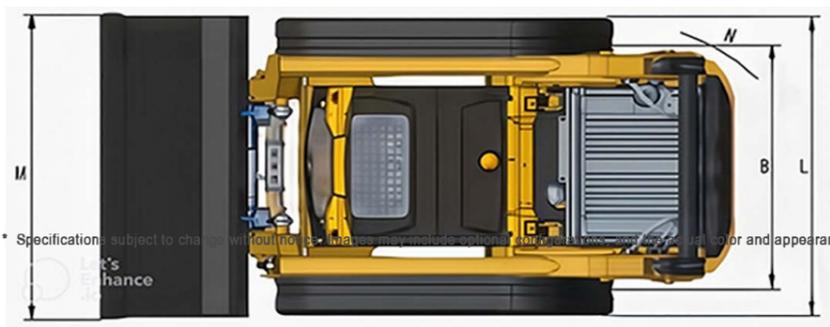

External Dimensions			CTL75VM
<b>A</b>	Length of track on ground	in	59
<b>B</b>	Tread(Track gauge)	in	60.2
<b>C</b>	Length without attachment	in	114.2
<b>D</b>	Overall length	in	145
<b>E</b>	Height to top of cab	in	83.4
<b>F</b>	Bucket hinge pin height at max. lift	in	129.3
<b>G</b>	Max. Rollback angle at carry position	degree	27
<b>H</b>	Reach at max. lift and dump	in	40.2
<b>I</b>	Ground clearance	in	10.8
<b>J</b>	Departure angle	degree	27
<b>K</b>	Max. dump angle	degree	39
<b>L</b>	Overall width	in	72.8
<b>M</b>	Bucket width	in	75
<b>N</b>	Turning radius from center-machine rear	in	68.1

\* Specifications subject to change without notice. Machine may include optional features not shown. Color and appearance of the product may differ from those shown.