


AT260

Compact Track Loader

ATLAS
IRON

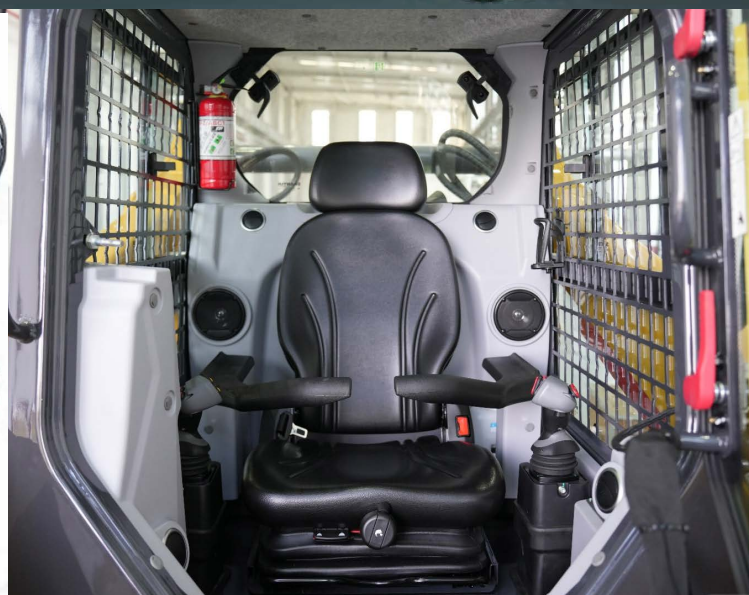


AT260

Conpact Track Loader



Model		AT260	
Engine	Model	Kubota V3307	
	Output	rpm	2600
	Displacement	L	3.33
	Cylinders		4
	Bore x Stroke	mm	94 × 120
Loader Performance	Rated operating capacity-35% tipping load		lb2614
	Tipping load		lb7469
	Breakout force	Bucket	lbf5.395
		Lift arm	lbf4.945
Undercarriage	Track Width	Standard	in12.5
		Wide	in15
	Ground pressure	Standard	psi6.93
		Wide	psi5.54
	Track rollers		4
	Travel speed	Low	mph5.59
		High	mph8.7
	Traction force		lbf9442
	Min. ground clearance	in	10.8
Hydraulic system	Aux. hydraulic flow	Std./High Flow	gal/min19.8/30.4
	Aux. hydraulic pressure		psi3035
Service refill capacities	Cooling system		galL2.9
	Hydraulic tank		gal5.3
	Fuel tank		gal24.6
Operating weight		lbs	10318

* Specifications subject to change without notice. Images may include optional configurations, and the actual color and appearance of he product may differ from those shown.

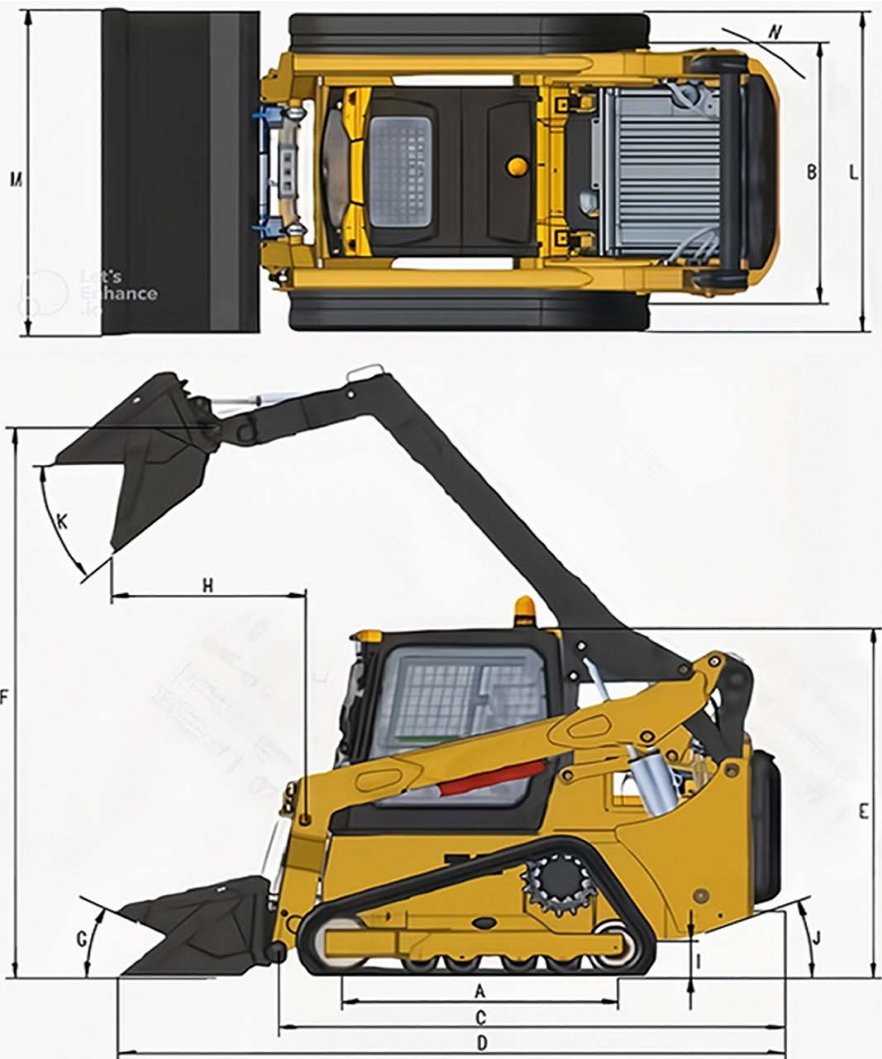

External Dimensions			CTL75VM
A	Length of track on ground	in	59
B	Tread(Track gauge)	in	60.2
C	Length without attachment	in	114.2
D	Overall length	in	145
E	Height to top of cab	in	83.4
F	Bucket hinge pin height at max. lift	in	129.3
G	Max. Rollback angle at carry position	degree	27
H	Reach at max. lift and dump	in	40.2
I	Ground clearance	in	10.8
J	Departure angle	degree	27
K	Max. dump angle	degree	39
L	Overall width	in	72.8
M	Bucket width	in	75
N	Turning radius from center-machine rear	in	68.1