AT260

COMPACT TRACK LOADER

STABLE TRACKED PERFORMANCE FOR JOBSITES AND ALL ALL OTHER APPLICATIONS

3-YEAR / 3,000-HOUR LIMITED WARRANTY



Stable tracked performance, strong breakout force and high-flow attachment capability.

71.6 HP	**2,614 LB**	**10,318 LB**	**30.4 GPM**
RATED POWER	RATED OPERATING CAPACITY CAPACITY	OPERATING WEIGHT	HIGH-FLOW HYDRAULICS

PRODUCT HIGHLIGHTS

1 KUBOTA V3307 ENGINE
Four-cylinder 3.33 L diesel power package rated at 71.6 HP at 2,600 RPM.

2 PREMIUM COOLING SYSTEM
In-line engine with an upper-mounted radiator or part of a premium cooling system.

3 HIGH-FLOW READY
Auxiliary hydraulic flow up to 30.4 gpm supports demanding attachments.

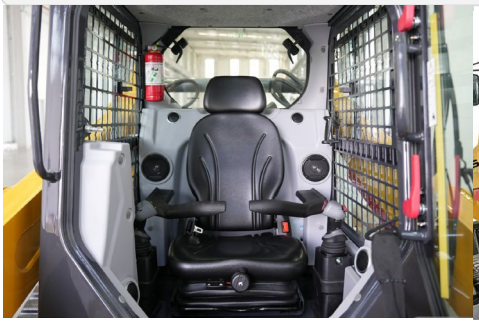







Specifications are subject to change without notice. Images may show optional configurations.

TECHNICAL SPECIFICATIONS

2,614 lb	7,469 lb	9,442 lbf
RATED OPERATING CAPACITY	TIPPING LOAD	TRACTION FORCE

ENGINE

Engine Model		Kubota V3307
Power	HP	71.6
Displacement	L	3.33
Cylinders		4
Bore x Stroke	mm	94 x 120

LOADER PERFORMANCE

Rated Operating Capacity - 35% Tipping Load	lb	2,614
Tipping Load	lb	7,469
Bucket Breakout Force	lbf	5,395
Lift Arm Breakout Force	lbf	4,945

HYDRAULIC SYSTEM

Auxiliary Flow - Standard / High	gpm	19.8 / 30.4
Auxiliary Pressure	psi	3,035

UNDERCARRIAGE

Track Width - Standard / Wide	in	12.5 / 15
Ground Pressure - Standard / Wide	psi	6.93 / 5.54
Track Rollers		4
Travel Speed - Low / High	mph	5.59 / 8.7
Traction Force	lbf	9,442
Minimum Ground Clearance	in	10.8

SERVICE REFILL CAPACITIES

Cooling System	gal	2.9
Hydraulic Tank	gal	5.3
Fuel Tank	gal	24.6

OPERATING WEIGHT

Operating Weight	lb	10,318

DIMENSIONS

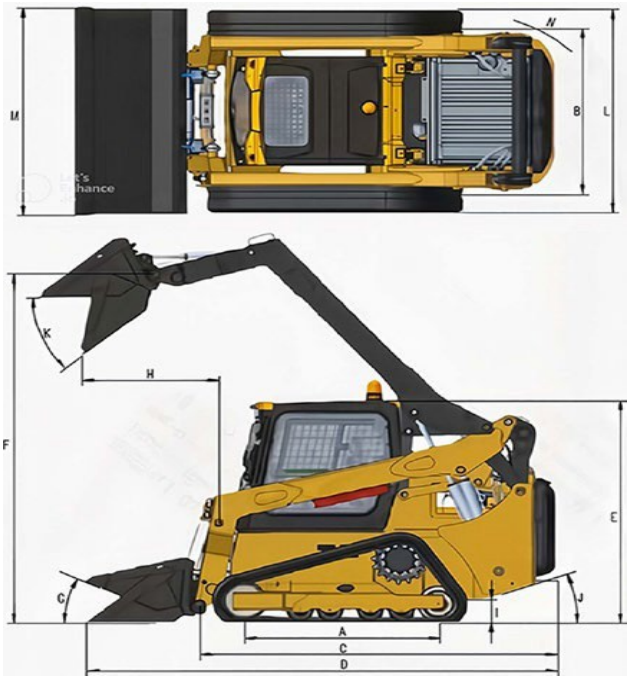

DIMENSION REFERENCE

A - Track Length on Ground	in	59
B - Track Gauge	in	60.2
C - Length without Attachment	in	114.2
D - Overall Length	in	145
E - Cab Height	in	83.4
F - Bucket Pin Height at Max Lift	in	129.3
H - Reach at Max Lift and Dump	in	40.2
L - Overall Width	in	72.8

Specifications are subject to change without notice. Images may show optional configurations.